

■ Features

- Single output from 54-63W
- 100-240Vac Universal input
- Safety standard: IEC60950, IEC60601, IEC61558, IEC60335
- Certificates: UL, CE
- SCP, OCP, OVP, and Over load protection
- Efficiency Level VI
- MTBF: 50,000 hours
- Dimension: 111x53.5x33.5mm



RoHS
Compliant



*Product images are for illustrative purposes only and may vary from actual design.

■ Application

- Consumer electronics and office equipment
- Industrial equipment


Custom Designs Available!

■ Model List

Model	Output Voltage	Output Current	Power	Certificates
DT060S-090-X-XX	9V	6A	54W	UL, CE
DT060S-120-X-XX	12V	5A	60W	UL, CE
DT060S-150-X-XX	15V	4A	60W	UL, CE
DT060S-180-X-XX	18V	3.5A	63W	UL, CE
DT060S-240-X-XX	24V	2.5A	60W	UL, CE

■ Mechanical Diagram


*Available A/C inlet with C6, C8, and C14

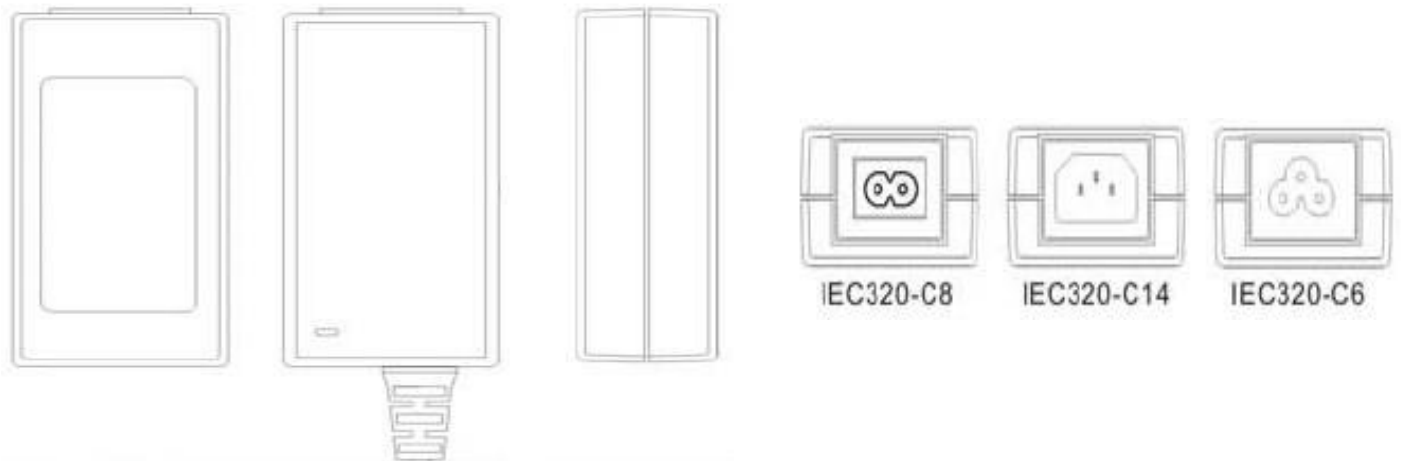

Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

January 11, 2019

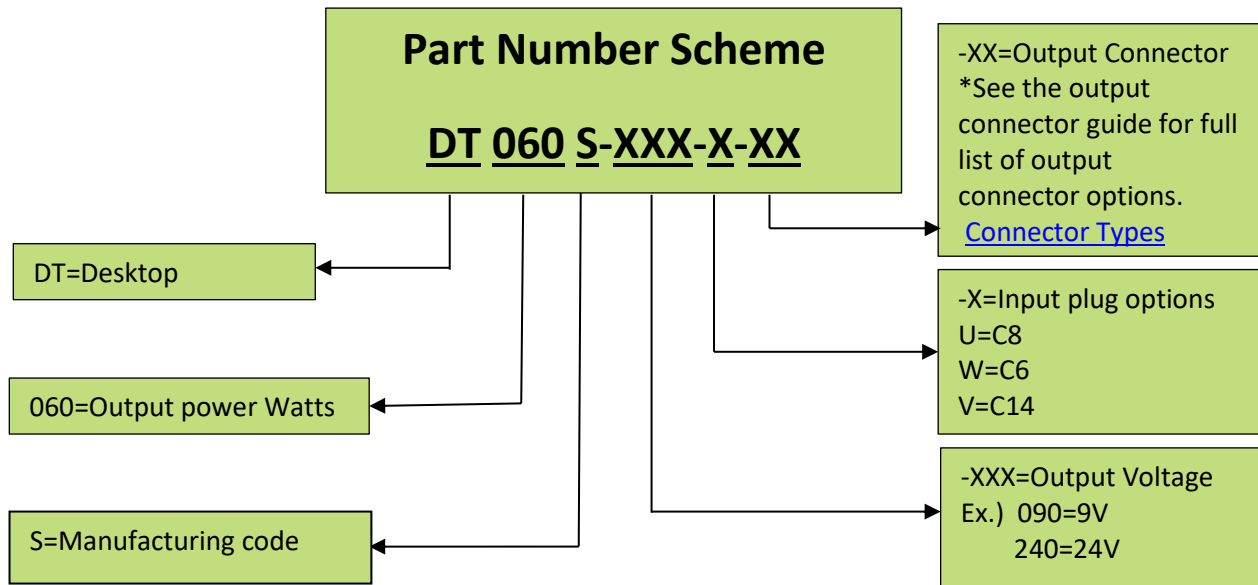

***Some Safety Agency Approvals may differ from what is shown. Contact Autec Sales!**

***Product images are for illustrative purposes only and may vary from actual design.**

***Specifications are subject to change without notice. Autec is not responsible for issues arising from errors or omissions.**