

■ Features

- Power Rating: 30-50W
- Input Voltage: 120-277Vac 0-10V Dimming
- Input Voltage: 108-132Vac Triac/ELV Dimming
- Constant current design
- Output current (665mA-1260mA)
- Output current Settable by DIP switch
- Efficiency up to 83%
- Compatible with 0-10V and Triac/ELV dimming
- UL Class 2 Output
- Lightning protection, OVP, SCP, and OTP
- IP20 and IP66 models
- 5-year warranty



*Product images are for illustrative purposes only and may vary from actual design.

■ Application

- Suitable for a variety of LED lighting applications

■ Model List*(See part number scheme for model number details)

Model Number	Input Voltage Range	Output Power	Output Voltage	Output Current Min.	Output Current Max.	Efficiency	Certification
L2WCH050S120PS-XYZ	120-277Vac 108-132Vac	50W	14-42V	665mA	1260mA	83%	UL/cUL

Settable Output Current	Output Power	Output Current Min.	Output Current	Output Current Max	Remarks
Output Current I	50W	1140mA	1200mA	1260mA	Level I, Tested @110V Input
Output Current II	45W	990mA	1050mA	1100mA	Level II, Tested @110V Input
Output Current III	38W	855mA	900mA	945mA	Level III, Tested @150V Input
Output Current IV	30W	665mA	700mA	735mA	Level IV, Tested @110V Input

(*Output Current settable by DIP switch)

Ordering options	
XY= Programmable	Z=Dimming
FC=Near Field Communication	D=DALI Dimming
	B=BLE Dimming

Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

June 26, 2019

■ Technical Data

Output voltage	14-42V
Input voltage range	120-277Vac 0-10 Dimming; 108-132Vac Triac/ELV Dimming
Frequency	47-63Hz
Max input current	0.28A @ full load and 110 V input, 0.14A @ full load and 220V input
Inrush Current	10A
Leakage Current	0.50mA
Efficiency	83%
Current Ripple	± 30%
Dimming	0-10/ELV
Set-up Delay Time	0.7s
Line Regulation	± 5%
Load Regulation	± 8%
Protection OVP	Hiccup mode. The power supply shall return to normal operation only after the power is turned on again
Protection SCP	No damage shall occur when any output operation in a short circuit condition. The power supply shall be self-recovered when the fault condition is removed.
Protection OTP	110 °C
Dimension	94x40x25 mm (3.70x1.57x0.98 inch)
Mounting Length	TBA
Overall Length	TBA
Weight	TBA
Packing	TBA
Lifetime	50,000 hours
MTBF	500,000 hours
Operating Temp., Humidity	-25°C+70°C; 10%-100% RH non-condensing
Storage Temp., Humidity	-40°C-85°C; 5%-100% RH

■ Safety and EMC Compliance

EMI	EN55015 Class B
EMS	EN61000-3-2, EN61000-3-3, EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-8, EN61000-4-11, EN61547

Disclaimer:


Autec Power Systems' (Autec) LED Drivers are Hi-Pot tested during the manufacturing process. Autec assumes no responsibility for secondary Hi-Pot testing at customer location or designated production line(s). Should customer require further Hi-Pot testing, at their own production line, following assembly of the LED Driver into the customer's assembled fixture, Autec requests advance notice. This request must be communicated to Autec in a timely manner and is recommended to be requested at time of issuing each purchase order.

Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com


31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

June 26, 2019


■ Derating Curve

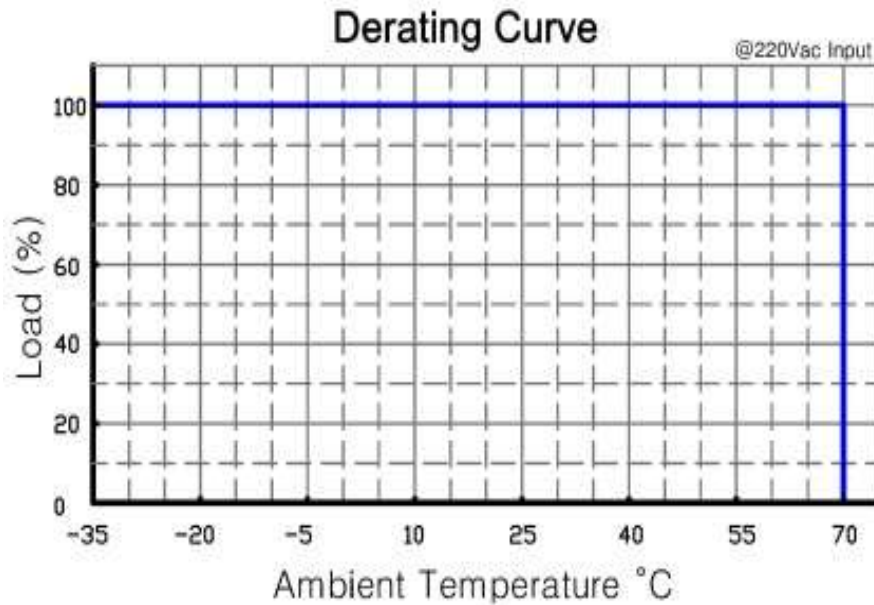


■ Static Characteristics

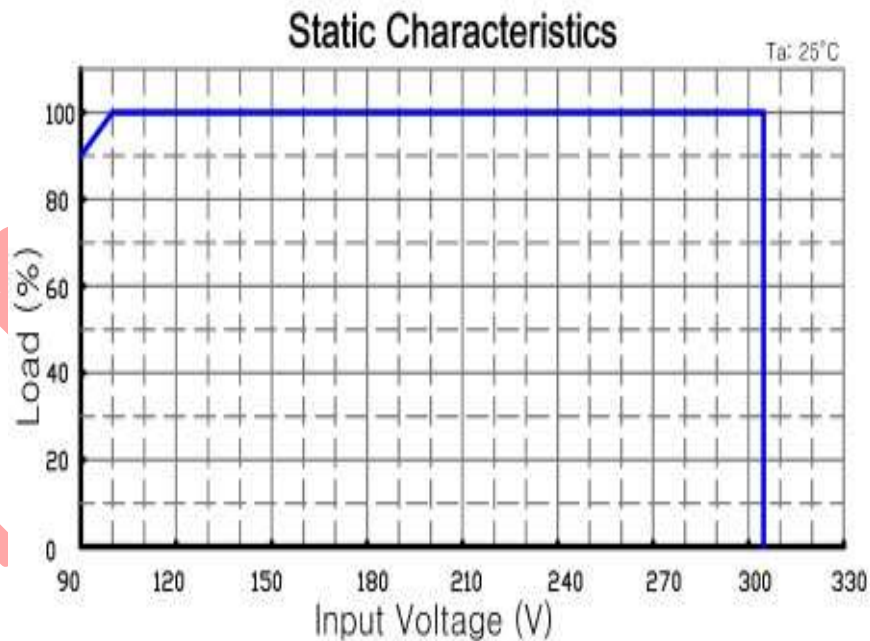

■ Mechanical Diagram

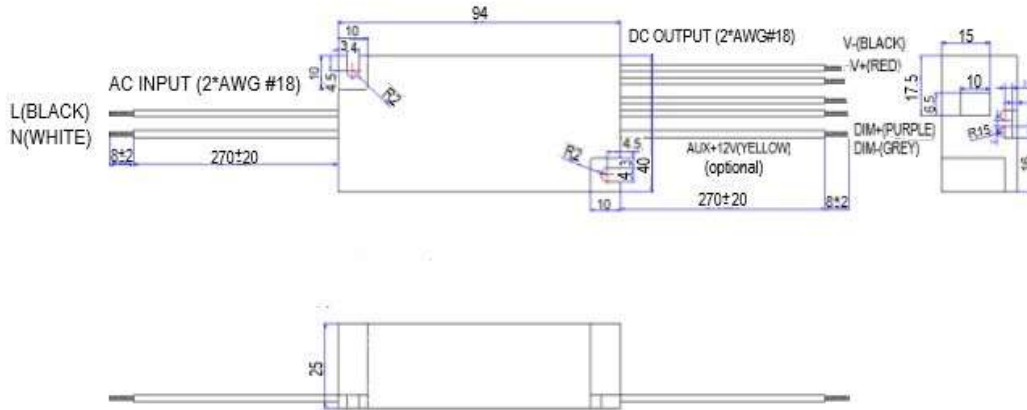

■ Dimming

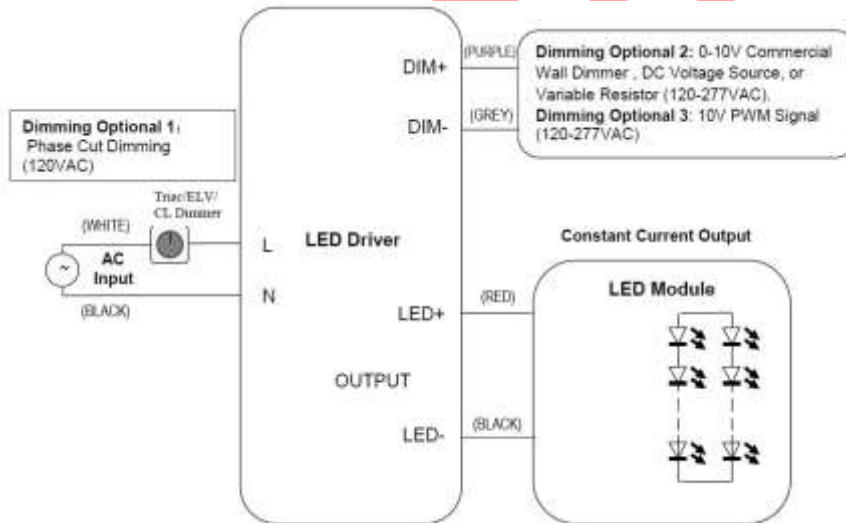

Mode 1 : Triac/ELV dimmer on Dimming Control


Parameter	Min.	Typ.	Max.	Conditions
Dimming Range	10%lo	-	100%lo	110 Vac
Conduction Angle	30°	-	180°	110 Vac

Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

June 26, 2019


■ Output Selection



Switch Location	700mA	900mA	1050mA	1200mA
1	ON	ON	OFF	OFF
2	ON	OFF	ON	OFF

Part Number Scheme

L2 W C H 050 S XXX P S

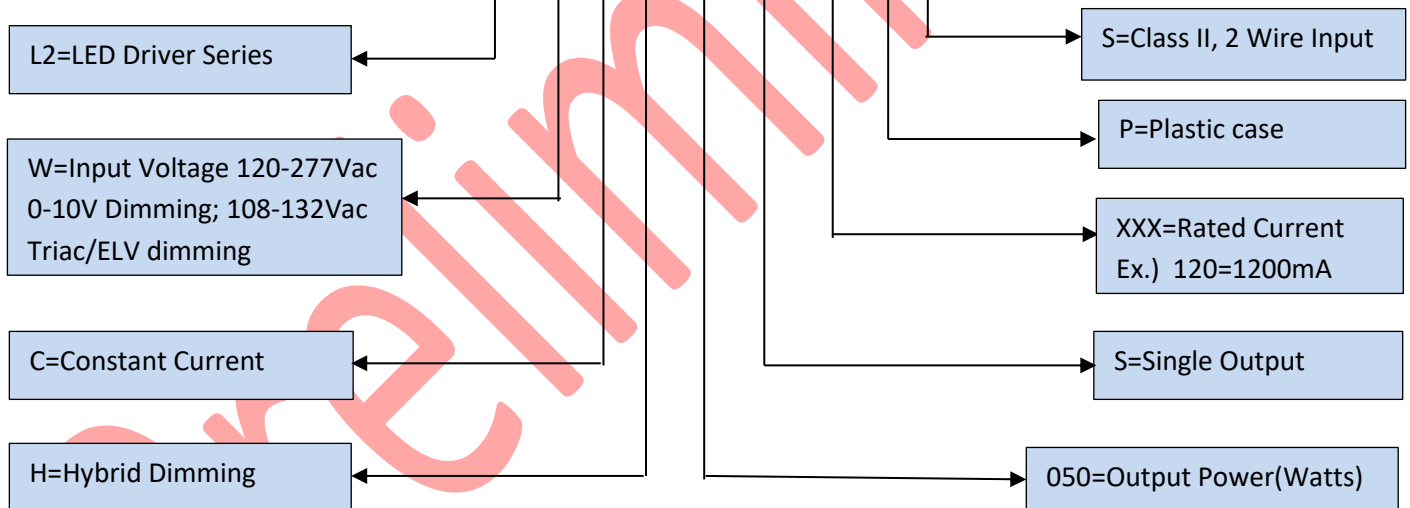

*Product images are for illustrative purposes only and may vary from actual design.

*Specifications are subject to change without notice. Autec is not responsible for issues arising from errors or omissions.

Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

June 26, 2019