

■ Features

- Power Rating: 26W programmable output range
- Input Voltage: 120-277Vac
- Constant current design
- Output current (260mA-1500mA)
- Output current programmable with Near Field Communication controller
- Efficiency up to 86%
- 0-10V, PWM, Timer dimming options.
- Dim-to-off(optional)
- Dimming 5-100%, 12VAUX
- UL Class P, Type HL
- Lightning, OVP, SCP, OTP, & Over Current Protection
- IP66
- 5-year warranty
- Surge Protection: Diff: 4kV, Common: 4kV



*Near Field
Communication
controller

*Product images are for illustrative purposes only and may vary from actual design.

■ Application

- Indoor and Outdoor applications

■ Model List*(See part number scheme for model number details)

Model Number	Input Voltage Range	Output Power	Output Voltage	Output Current Min.	Output Current Max.	Efficiency 110Vac/220Vac	Certification
L2WCP026S108PS-WWXYZ	120-277Vac	26W	24-40V	430mA	1080mA	82%/84%	UL/cUL
L2WCP026S065PS-WWXYZ	120-277Vac	26W	40-68V	260mA	650mA	83%/84%	UL/cUL

*Contact the factory to enable Dim-to-off feature

Ordering options		
WW=Case Shape	XY= Programmable	Z=Dimming
PU=Puck Case	FC=Near Field Communication	D=DALI Dimming
RE=Rectangular Case		B=BLE Dimming
SQ=Square 2 Gang Case		

■ Technical Data

Input voltage range	120-277Vac
Frequency	50/60Hz
Power factor	> 0.99 @115Vac & 80~100% Full load, > 0.95 @230Vac & 80~100% Full load
Output voltage	24-68V

Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

June 26, 2019

■ Technical Data(cont.)

Output power	26W
Ripple and Noise	2.0%Vo
Max input current	0.4A@115Vac; 0.2A@230Vac
Max input Power	26W
Efficiency	86%
Line Regulation	± 5%
Load Regulation	± 3%
Inrush Current	65A @ 230Vac cold start +25°C
Dimming	0~10V/ PWM/ Timer, Dim-to-off Dimming Options
Dimming Range	5~100%
THD	< 20% @120/277Vac & 80~100% load condition
Current Programmable	Yes
Output Current Programmable Range	260-1500mA
Over Current Protection	Protection type: Constant current limiting, recovers automatically after fault condition is removed
Short Current Protection	Hiccup mode, recovers automatically after fault condition is removed
Over Voltage Protection	1.3Vo, Protection type: Hiccup mode, recovers automatically after fault condition is removed
Over Temp. Protection	Hiccup mode, recovers automatically after fault condition is removed
Operating Temperature	-35~+70°C
Operating Humidity	10 ~ 100% RH non-condensing
Storage Temp., Humidity	-40 ~ +85°C, 5 ~ 100% RH
Temp. Coefficient	± 0.05%/°C (0~50°C)
MTBF	50,000 Hours
Vibration	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes
Dimensions	58x87.5x30 mm (2.28x3.44x1.18 in)
Mounting length	67mm (2.63 in)
Packing	25pcs/carton
Weight	200.0g


■ Safety Compliance

Safety Standards	UL8750, UL935, UL1012, CSA-C22.2 No.107.1, EN61347-1, EN61347-2-13
Withstand Voltage	I/P – O/P: 3.75kVAC
Isolation Resistance	I/P – O/P: 100M Ohms / 500VDC / 25°C / 70% RH
EMC Emission	Compliance to EN55015, EN61000-3-2 Class C ($\geq 60\%$ load); EN61000-3-3
EMC Immunity	Compliance to EN61000-4-2,3,4,5,6,8,11; EN61547, EN55024


Disclaimer:

Autec Power Systems' (Autec) LED Drivers are Hi-Pot tested during the manufacturing process. Autec assumes no responsibility for secondary Hi-Pot testing at customer location or designated production line(s). Should customer require further Hi-Pot testing, at their own production line, following assembly of the LED Driver into the customer's assembled fixture, Autec requests advance notice. This request must be communicated to Autec in a timely manner and is recommended to be requested at time of issuing each purchase order.

■ Derating curve

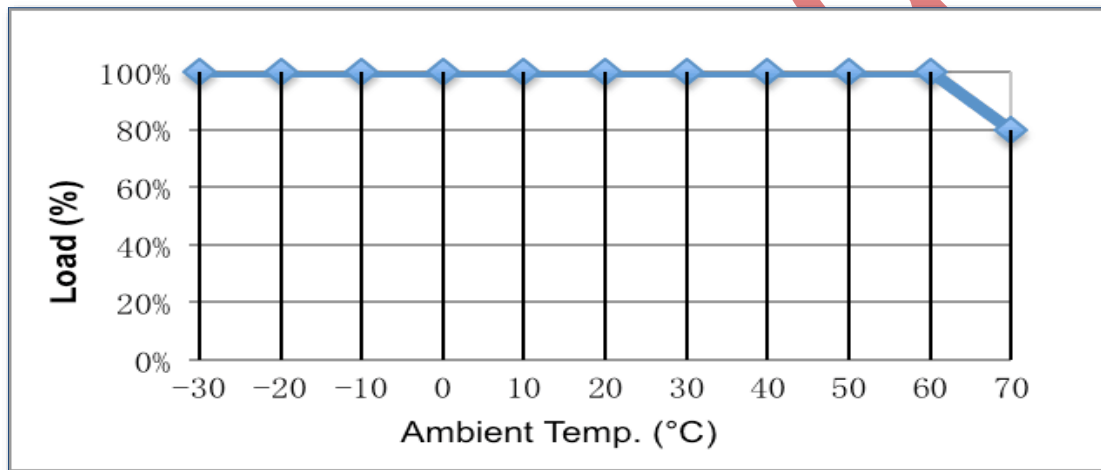

■ Static Characteristics

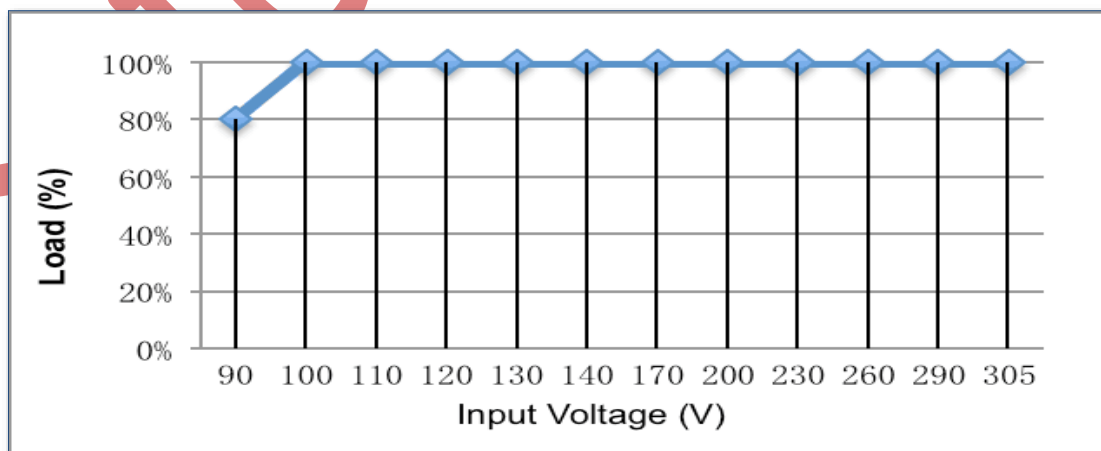


Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com


31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

June 26, 2019


■ Power Factor vs. Output

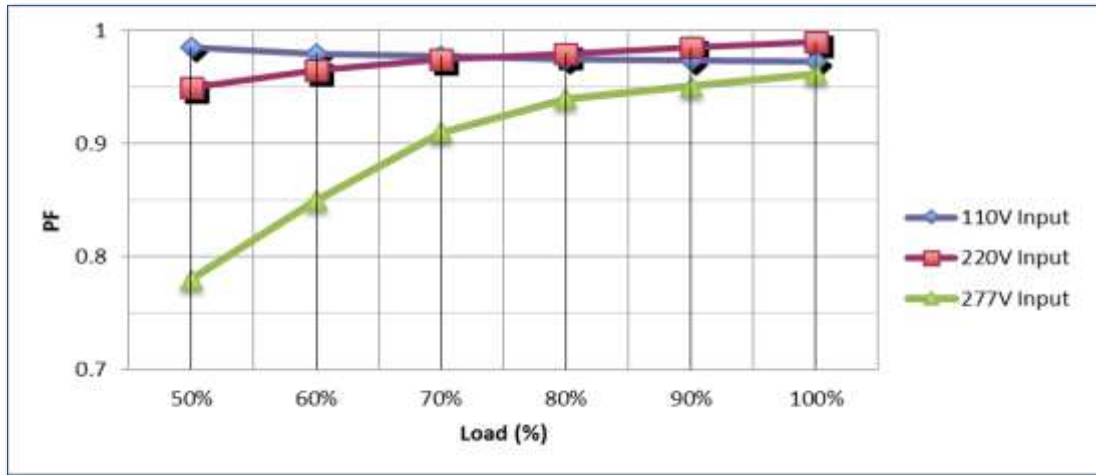


■ THD vs. Output

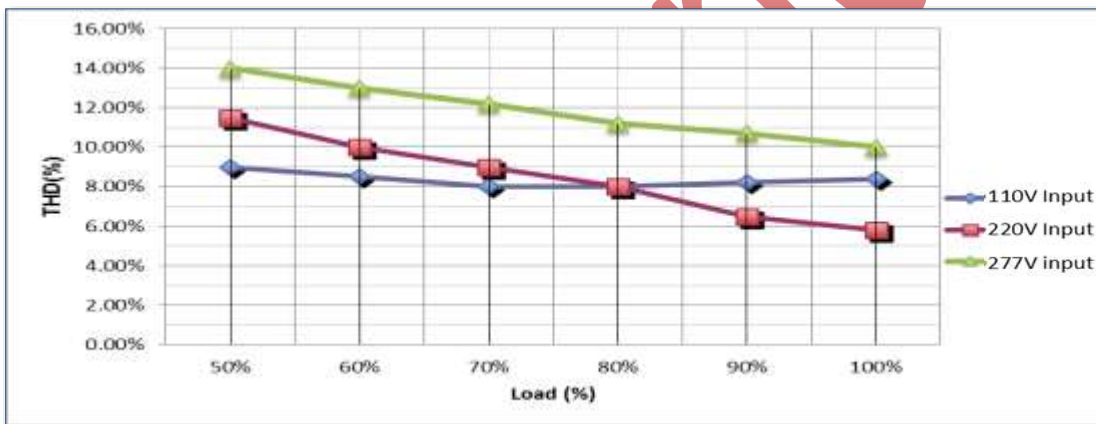


■ Efficiency vs. Output

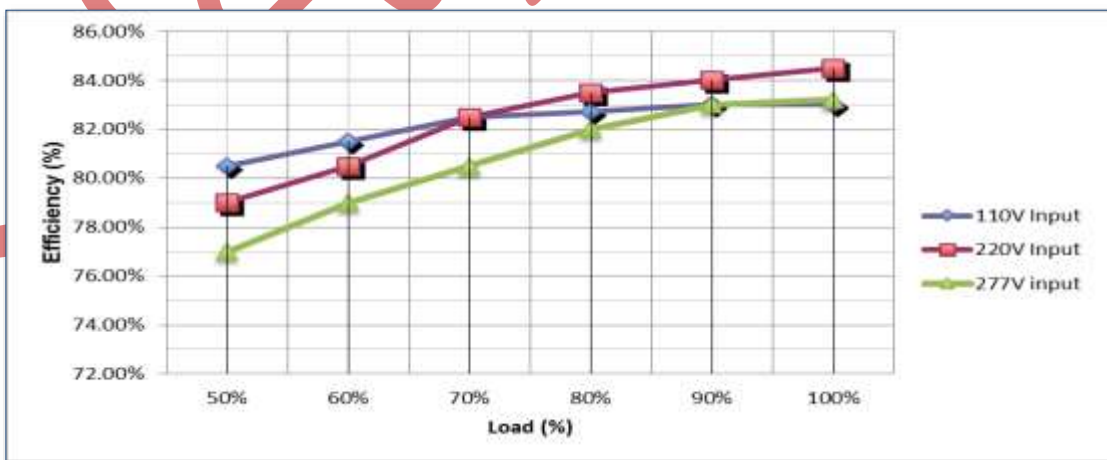


■ Lifetime vs Case Temp.

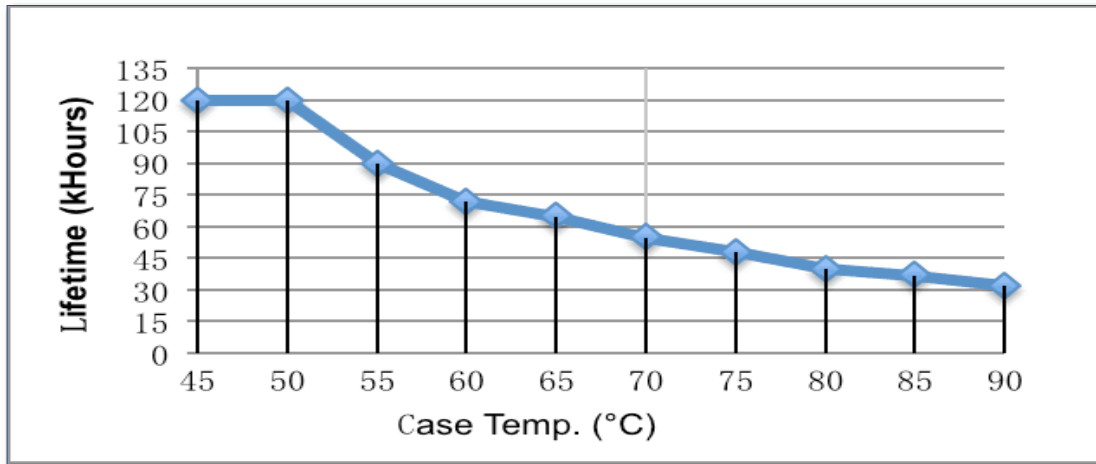

■ Vo vs Io

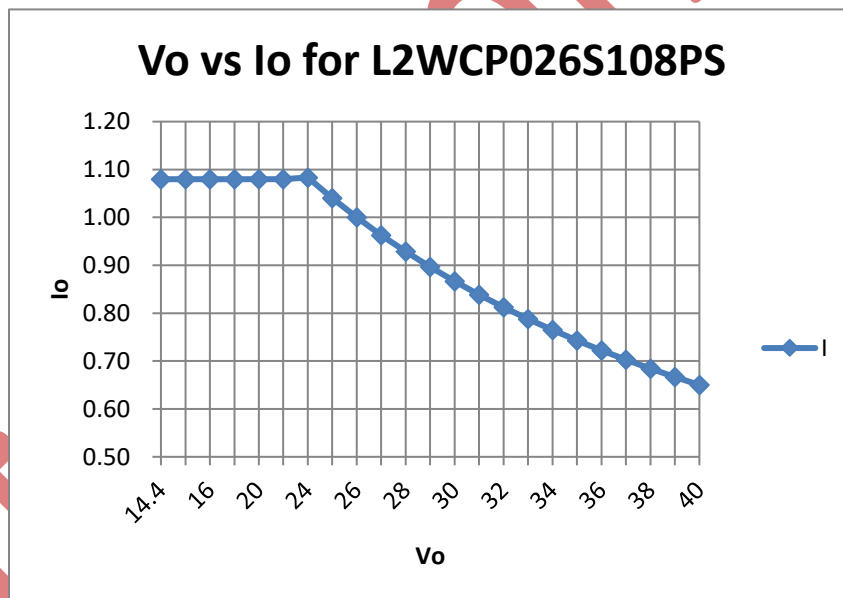

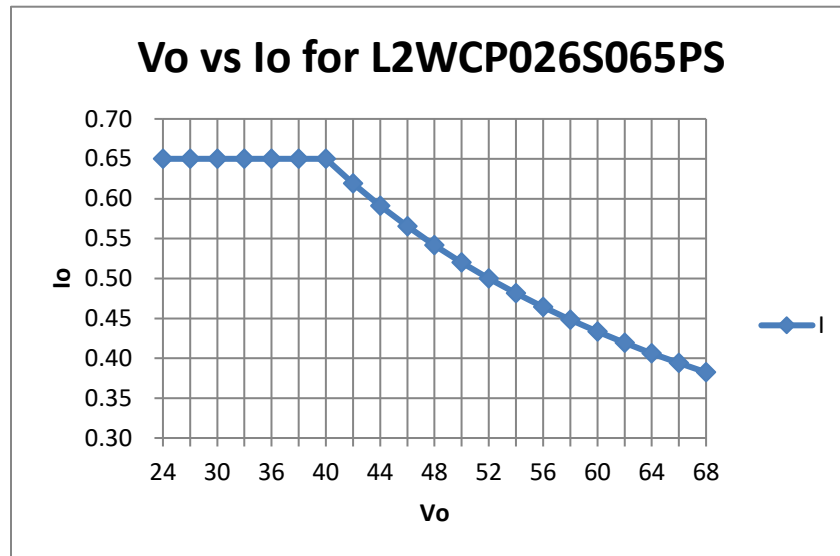

■ Near Field Communication Controller





NOTE:

1. The Near Field Communication controller can program the output current, voltage and timer delays.
2. The Near Field Communication programming is a non-contact process, therefore much safer compared to traditional programming methods.
3. Power devices can be programmed without AC power applied to the driver.

■ Dimming

0-10V Analog Dimming & PWM Dimming

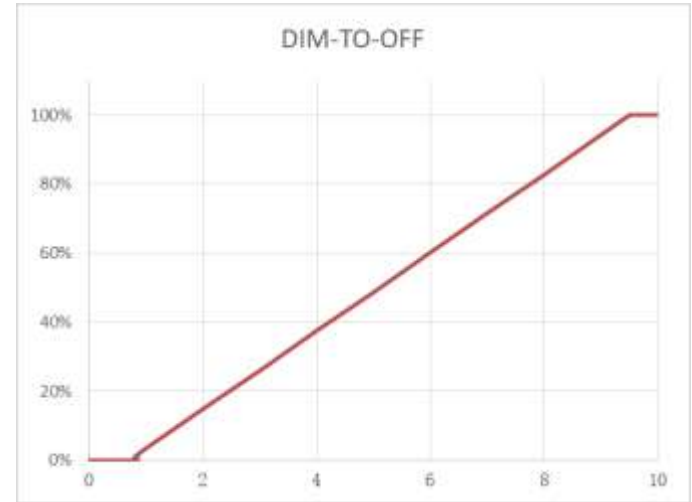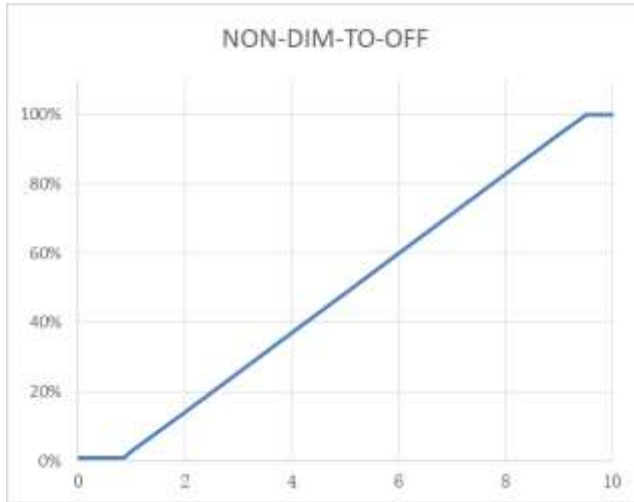


GND	Grey
Dimming wire 0-10V & PWM	Purple
12V AUX	Yellow
Input Dimming Voltage	0-10V
DIM+ Source Current	0-1mA
12V AUX Source Current	20mA
PWM Frequency Range	1-10KHZ
PWM high level	10V

NOTE:

1. I_o is actual output current and I_r is rated current without dimming control.
2. For the driver to operate properly, the load voltage must be in the working voltage range.
3. We have DIM-TO-OFF option, which can be programmed by the programmer.
4. Maximum input voltage for the dimming wire is 12V.
5. AUX wire is only for source, can't connect to other voltage source.


■ PWM Dimming

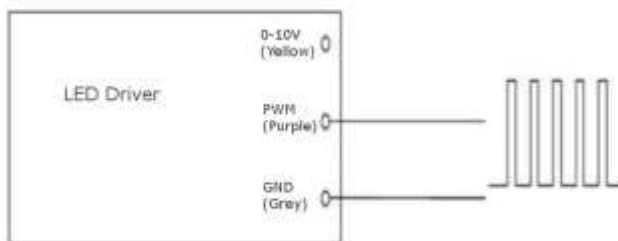


■ TIMER Dimming


NOTE:

1. The dimming time can be programmed by the programmer.
2. The time of t1 and t2 can be set by the programmer.(0.5h step)
3. The value of I1 and I2 can be set by the programmer.
4. Changing the current from I1 to I2 may take a few min.

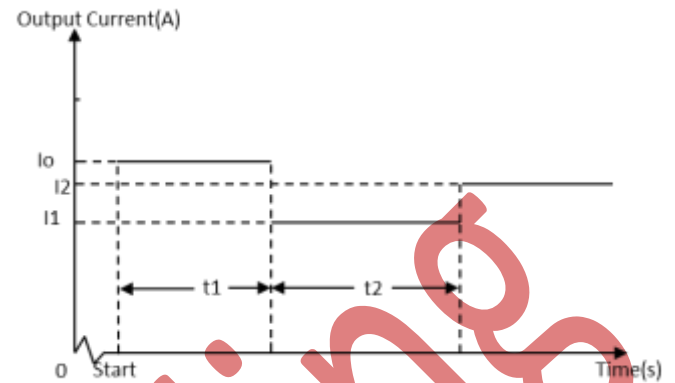

■ Mechanical Design

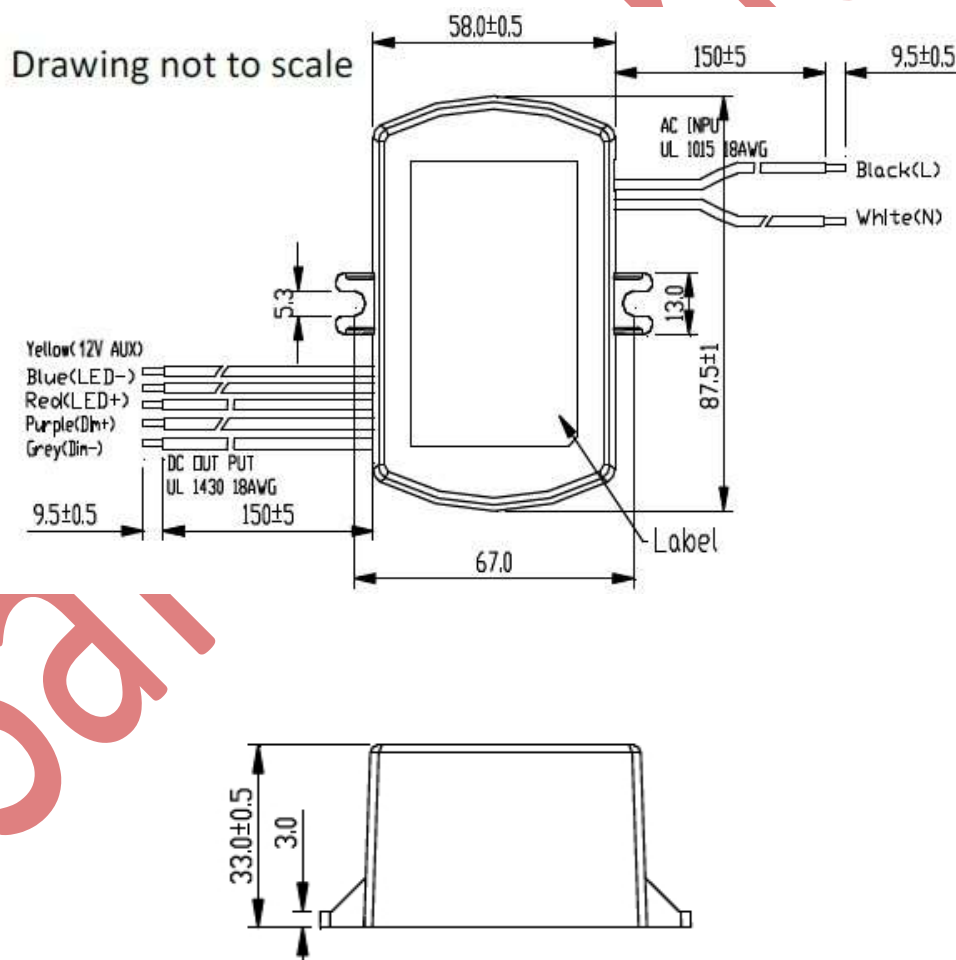

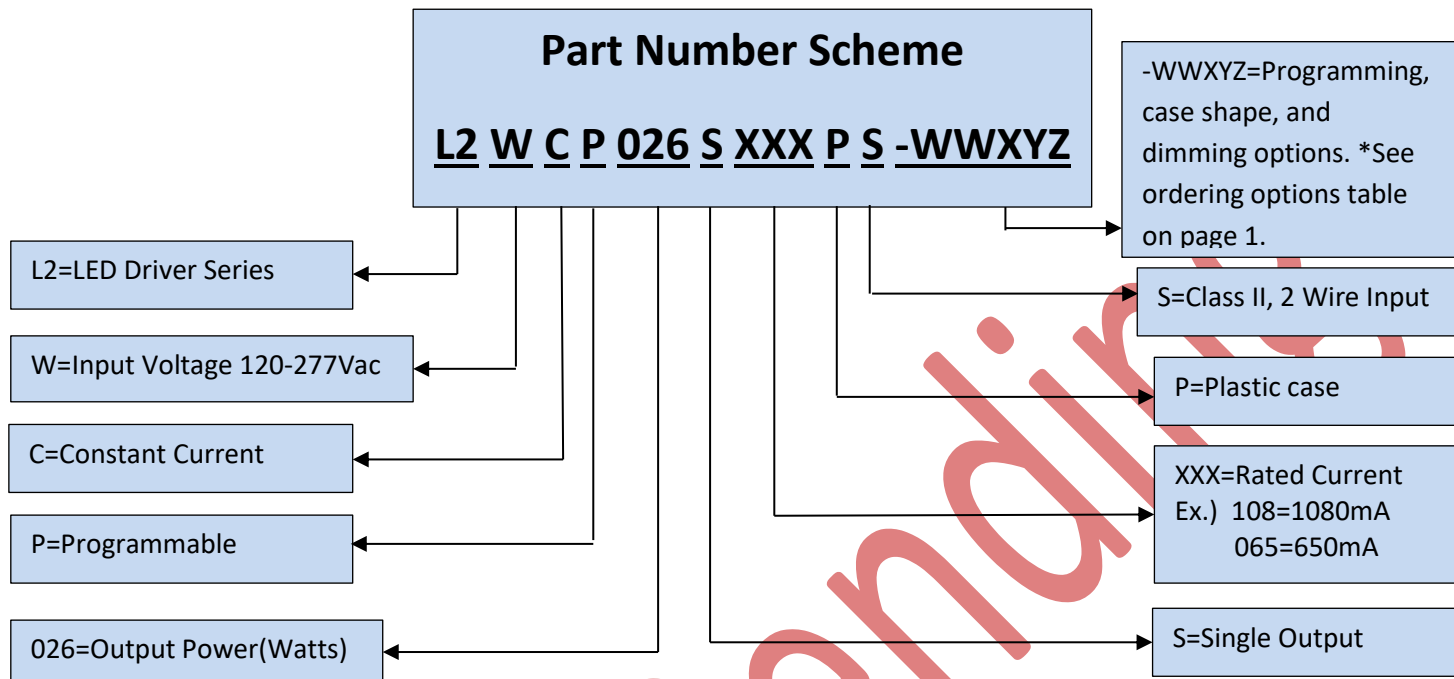

***Product images are for illustrative purposes only and may vary from actual design.**

***Specifications are subject to change without notice. Autec is not responsible for issues arising from errors or omissions.**