

■ Features

- Power rating: 100W
- Input Voltage: 100-240Vac
- Constant voltage design
- Output Current (0mA-8300mA)
- Efficiency to 88%
- Protections: SCP, OTP, and OCP
- UL Class II output available
- Class P
- Tc = 90°C
- IP65
- 5-year warranty



*Product images are for illustrative purposes only and may vary from actual design.

■ Application

- LED luminaries such as signage and grow lights
- Dry, Damp, and Wet locations

■ Model List

Model Number	Input Voltage Range	Output Power	Output Voltage	Output Current Min.	Output Current Max.	Efficiency	Certification
L3UV-100S012PS	100-240Vac	100W	12V	0	8300mA	86%	UL/cUL/ CE
L3UV-100S024PS	100-240Vac	96W	24V	0	4000mA	88%	UL/cUL/ CE

■ Input Characteristics

Parameter	Min	Typ.	Max	Remarks
Rated AC input range	100Vac		240Vac	
AC input range	90Vac		264Vac	
Input frequency range	47Hz	50/60Hz	63Hz	
Max input current			2.4A	90Vac, 80% load
Max Input Power	12V		125W	120Vac, full load
	24V		125W	120Vac, full load
Max. Inrush current(220Vac)			90A	cold start
No load power			0.5W	220Vac/50Hz, No load

■ Output Characteristics

Parameter		Min	Typ.	Max	Remarks
Output current range	L3UV-100S012ST		8.3A		
	L3UV-100S024ST		4A		
Output voltage range	L3UV-100S012ST		12V		Full load
	L3UV-100S024ST		24V		
Efficiency@220Vac	L3UV-100S012ST	84%	86%		Output 12V/8.3A
	L3UV-100S024ST	86%	88%		Output 24V/4A
Output voltage tolerance		-5%		+5%	Full load
Output voltage ripple (pk-pk)			1%	2%	Full load
Start-up time				0.5S	120Vac
Line regulation		-1%		+1%	Full load
Load regulation		-2%		+2%	
Transient Response	Overshoot range	-5%		+5%	di/dt=1A/μs, 25%-50%-25%
	Recover time			10ms	

■ Other Characteristics

Parameter		Min	Typ.	Max	Remarks
Protection	OCP	120% Io		150% Io	
	OVP	110% Vo		150% Vo	
	Short Circuit Protection	Driver will not damage with short circuit power <10W			Hiccup mode
Life Time		≥30,000hrs			80% Load
MTBF		200,000hrs			220Vac full load (MIL-HDBK-217F)
Temperature Coefficient		-0.03%/°C		+0.03%/°C	Tc: 0°C~90°C
Tc		90°C			
Warranty		3 years			
Net Weight		450g			
Dimension		190x52x37mm			LxWxH
Packaging		0.45kg /unit; 14pcs/carton			

*Note: All the parameters above are tested at 25°C, unless specified

■ Environmental Requirements

Parameter	Min	Typ.	Max	Remarks
Operating Temperature	-25°C	25°C	+90°C	
Storage Temperature	-40°C	25°C	+85°C	
Operation Humidity	10%RH		90%RH	
Storage Humidity	5%RH		95%RH	
Altitude	-65m		4,000m	


■ Safety Compliance

Certification		Standard	Status	Remark
UL/cUL		UL8750	√	
CE		EN 61347-2-13:2014 EN61347- 1:2008+A1:2011+A2:2013	√	
Item		Standard	Remark	
Insulation Strength	Input-output	1600Vac/10mA Max/60s	Reinforced insulation	
Insulation Resistance	Input-output	≥10 MΩ	Testing Voltage: 500Vdc	
Ground Resistor		NA		
Leakage Current		≤0.75mA	240Vac	
Item		Criterion	Remark	
Conduction Emission		EN55015:2013+A1:2015		
Radiation Emission		EN55015:2013+A1:2015		
Surge		IEC/EN61000-4-5	Difference mode 2kV Criterion A	

Disclaimer:

Autec Power Systems' (Autec) LED Drivers are Hi-Pot tested during the manufacturing process. Autec assumes no responsibility for secondary Hi-Pot testing at customer location or designated production line(s). Should customer require further Hi-Pot testing, at their own production line, following assembly of the LED Driver into the customer's assembled fixture, Autec requests advance notice. This request must be communicated to Autec in a timely manner and is recommended to be requested at time of issuing each purchase order.


■ Inrush Current

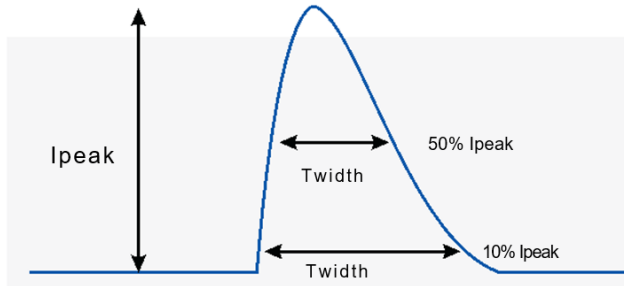


Vin	Ipeak	T(@10% of Ipeak)	T(@50% of Ipeak)
220Vac	90A		1.63mS

■ Performance Curves


Output power Vs. Input Voltage

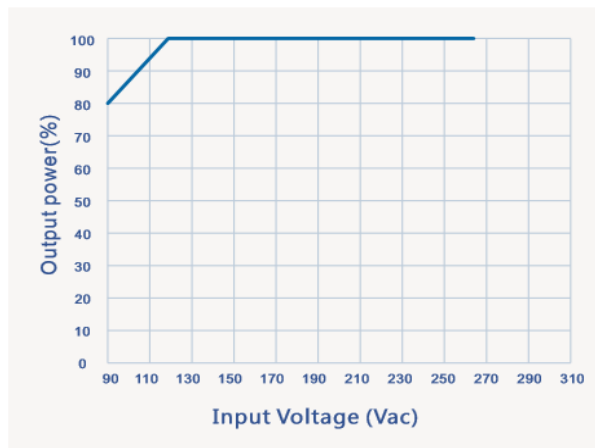


Output power Vs. Ambient Temperature

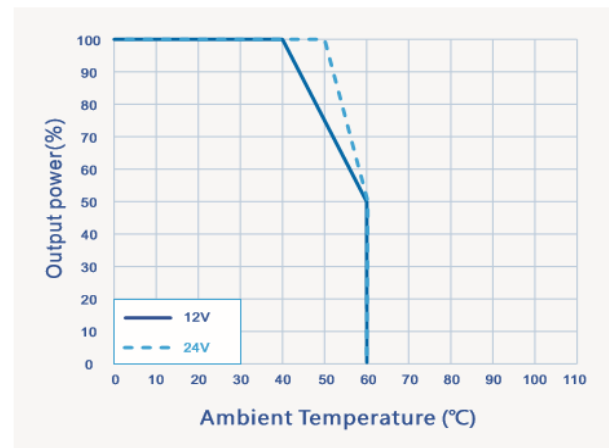

Efficiency Vs. Output Power

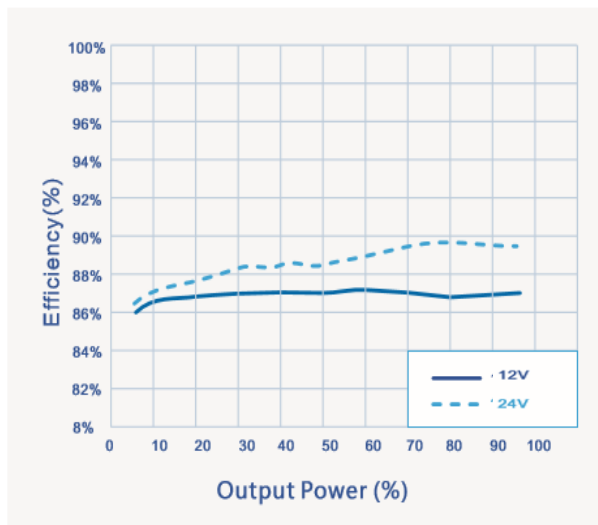

Lifetime Vs. Case Temperature

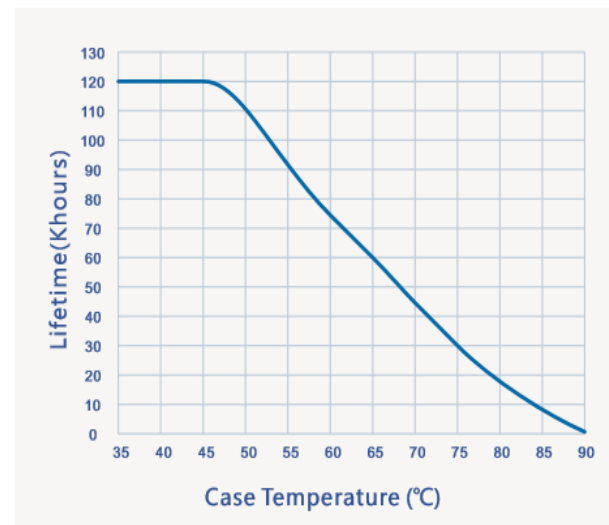


Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

February 2, 2020

■ **Mechanical Diagram**

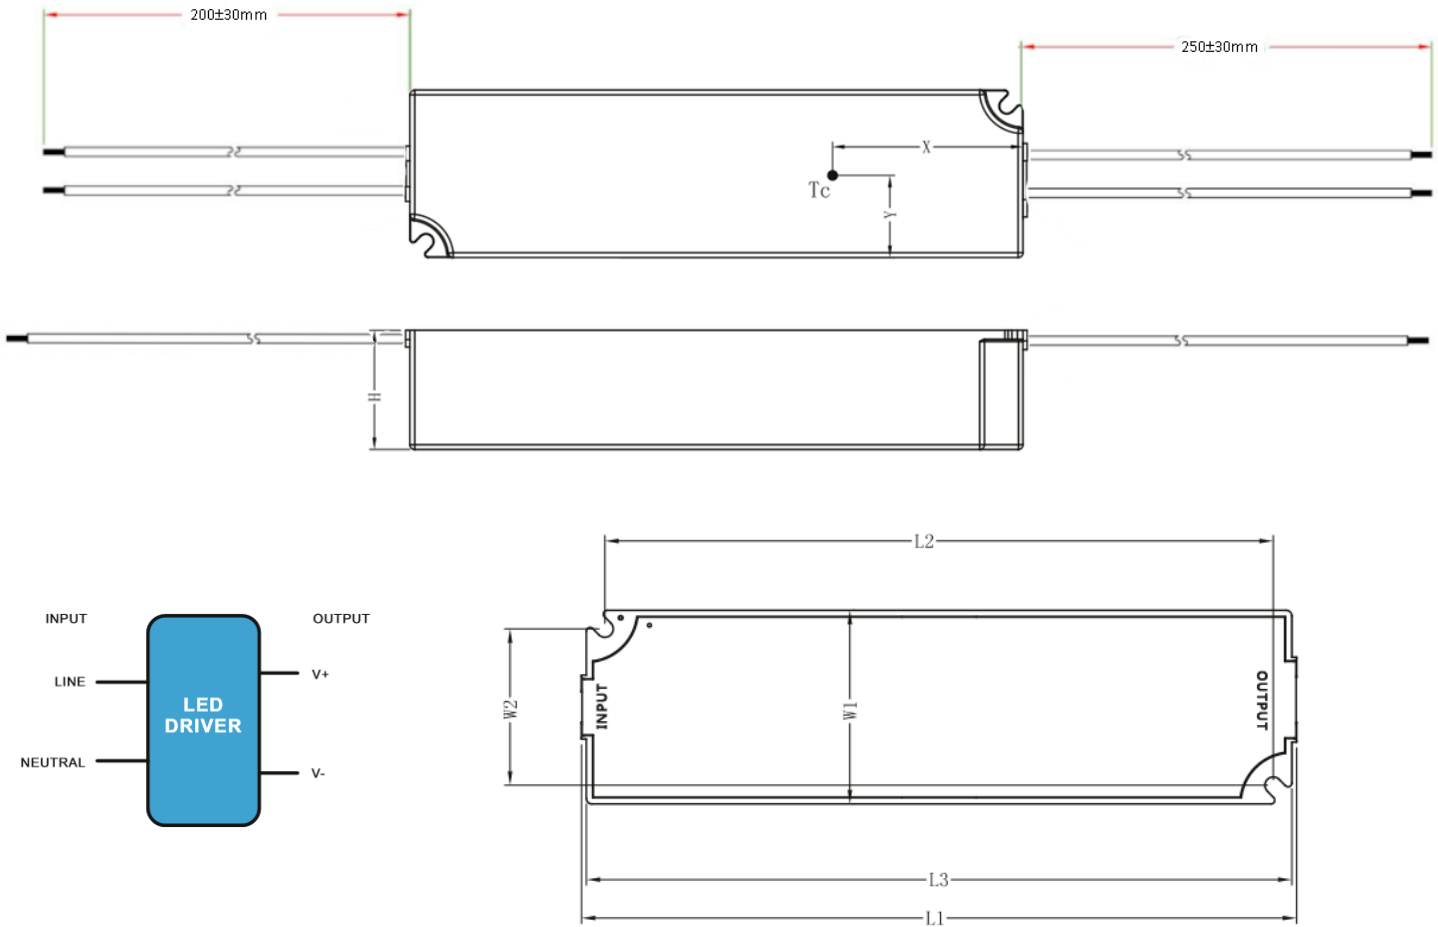

Name Description	Call out	mm
Case Width	W1	52
Case Height	H	37
Overall Length	L1	190
Mounting Hole Length	L2	180
Mounting Hole Width	W2	42
Tc Point Position	X	74
Tc Point Position	Y	25.5

Wire Specifications	
Input	UL 1015 #18AWG 105°C, O.D: 2.6mm, BLACK: L, WHITE: N
Output	UL 1015 #18AWG 105°C, O.D: 2.6mm, RED: V+, BLACK: V-


Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

February 2, 2020

Part Number Scheme

L 3 U V - 100 S XXX P S

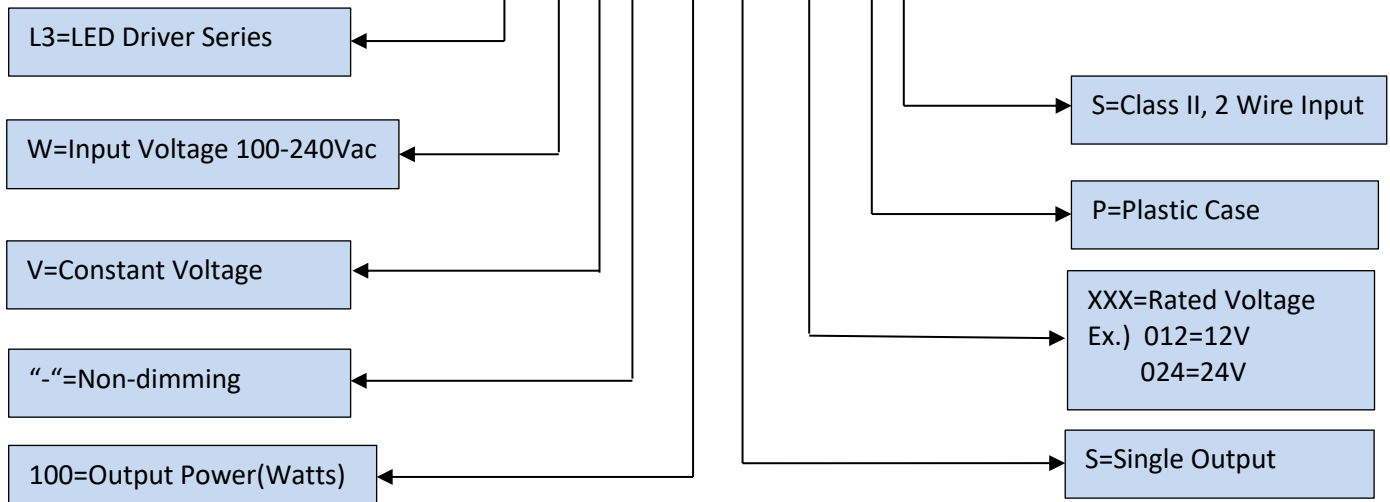

***Product images are for illustrative purposes only and may vary from actual design.**

***Specifications are subject to change without notice. Autec is not responsible for issues arising from errors or omissions.**