

■ Features

- Power Rating: 80W
- Input Voltage: 90-305Vac
- Constant current and constant voltage design
- Fixed output current (70mA-3330mA)
- Efficiency to 90%
- Compatible with 0-10V dimming
- UL Class 2 Output options available
- Lightning, OVP, SCP, OTP & Open Circuit Protection
- IP54
- 5-year warranty
- Surge Protection: L-N 4kV, L/N-Earth 4V
- Metal case



*Product images are for illustrative purposes only and may vary from actual design.

■ Application

- Indoor LED lights
- High bay and low bay lights, LED panels

■ Model List*(See part number scheme for model number details)

Model Number	Input Voltage Range	Output Power	Output Voltage	Output Current Min.	Output Current Max.	Efficiency	Certification
L4WV-080S024ST-20*	90-305Vac	80W	12-24V	333mA	3330mA	90%	UL/cUL
L4WVD080S024ST-20*	90-305Vac	80W	12-24V	333mA	3330mA	90%	UL/cUL
L4WV-080S040ST-20*	90-305Vac	80W	20-40V	200mA	2000mA	90%	UL/cUL
L4WVD080S040ST-20*	90-305Vac	80W	20-40V	200mA	2000mA	90%	UL/cUL
L4WV-080S057ST-20*	90-305Vac	80W	28-57V	140mA	1400mA	90%	UL/cUL
L4WVD080S057ST-20*	90-305Vac	80W	28-57V	140mA	1400mA	90%	UL/cUL
L4WV-080S076ST-20	90-305Vac	80W	38-76V	105mA	1050mA	90%	UL/cUL
L4WVD080S076ST-20	90-305Vac	80W	38-76V	105mA	1050mA	90%	UL/cUL
L4WV-080S114ST-20	90-305Vac	80W	57-114V	70mA	700mA	90%	UL/cUL
L4WVD080S114ST-20	90-305Vac	80W	57-114V	70mA	700mA	90%	UL/cUL

*Class 2 output (-=No dimming/D=Dimming)

■ Technical Data

Input voltage range	90-305Vac
Frequency	47-63Hz
Power factor	> 0.95 @115Vac & 80~100% Full load, > 0.90 @277Vac & 80~100% Full load

Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com
31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com


■ Technical Data(cont.)

Output voltage	12-24V, 20-40V, 28-57V, 38-76V, 57-114V
Output power	80W
Max. Current ripple	350mA, 200mA, 150mA, 120mA, 100mA
Max. Voltage ripple	±0.5%
Max input current	1.1A
Max input Power	95W
Efficiency	90%
Max. open circuit voltage	35V, 50V, 65V, 85V, 125V
Dimming	D Version: 0-10V Dimming
THD	<20% @ 120Vac & 80~100% full load, <20% @ 277Vac & 80~100% full load
Output Current	1800mA
Protection	OVP, SCP, OTP, and open circuit protection
Environmental Protection	UL Dry and Damp, and Type TL
Working Temperature	-20~+60°C
Max Case Temperature	90°C
Surge Protection	Line to line 4kV, Line to Earth 4kV
ANSI Surge Type	1.2/50µs Combination Wave (w/t 2Ω)
Isolation (Primary to Secondary)	3750Vac/10maMax/60 seconds
Dimension	215x42x30 mm (8.46x1.65x1.18 inch)
Mounting length	228 mm (8.98 inch)
Overall length	242 mm (9.53 inch)
Weight	0.5 kg (1.1 lb)
Lifetime	>50,00 hours @full load, 75°C Tcase
Packing	0.5 kg; 25 units/carton; 36 cartons/pallet


■ Safety Compliance

Safeties	UL1310 Class 2, UL8750
Electromagnetic Compliance	Per Title 47 CFR Part 15 Class B

■ Derating Curve

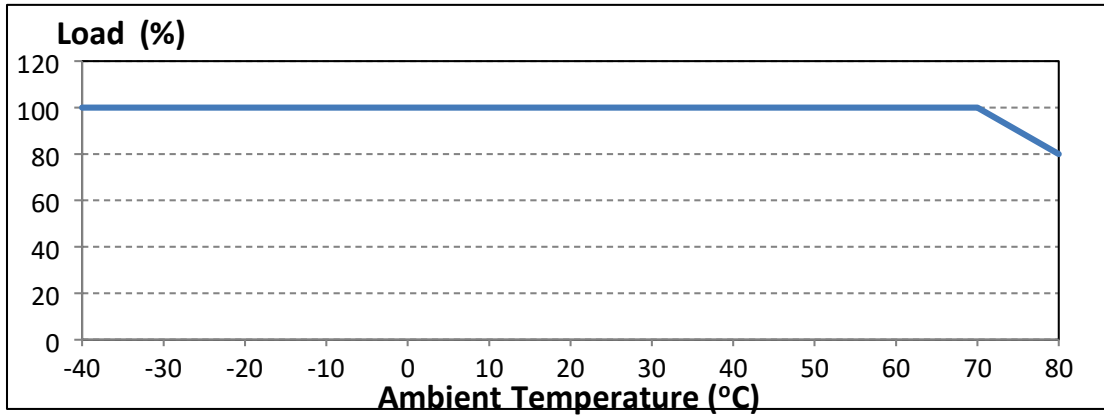


■ Static Characteristics

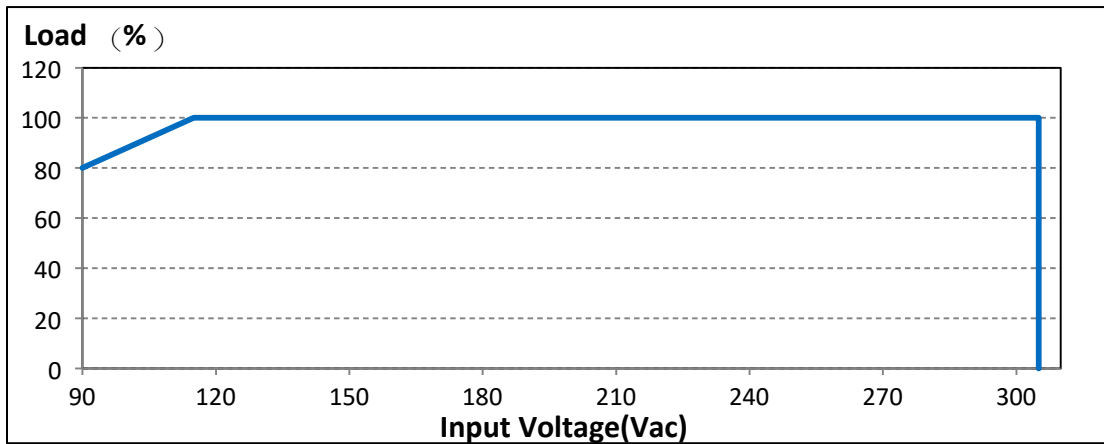


■ Electrical Specifications

Output Current vs. Case Temperature (with $\pm 5^\circ\text{C}$ Tolerance)

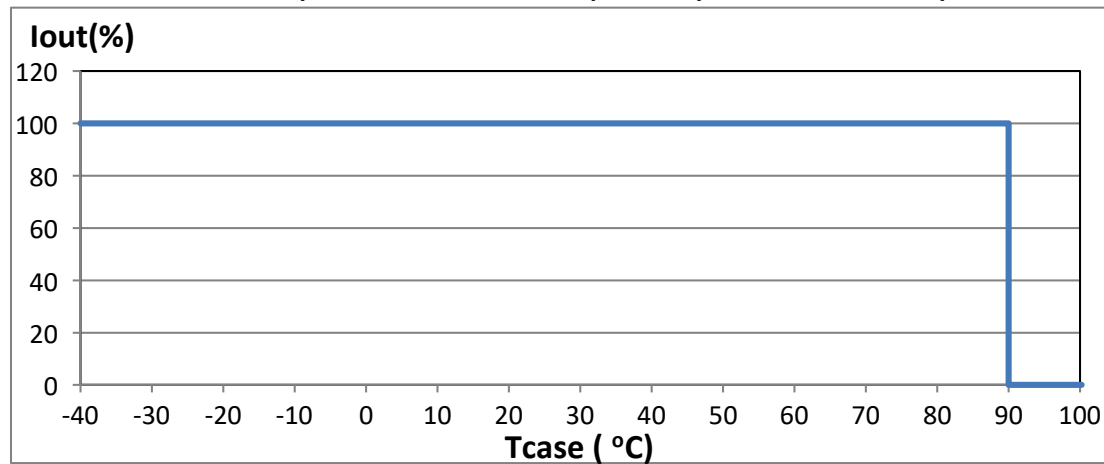


■ Lifetime vs Case Temperature

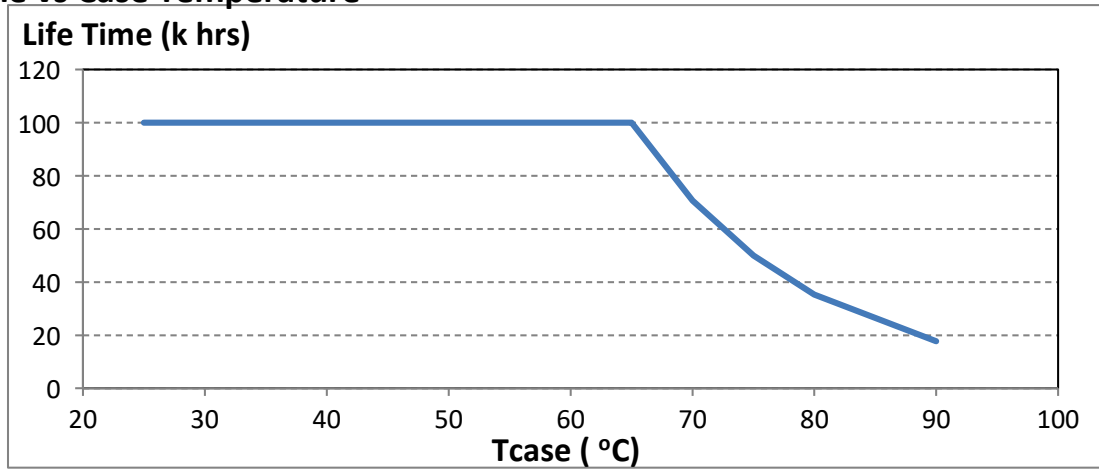


■ Power Factor vs. Output Power

(@ 25°C)

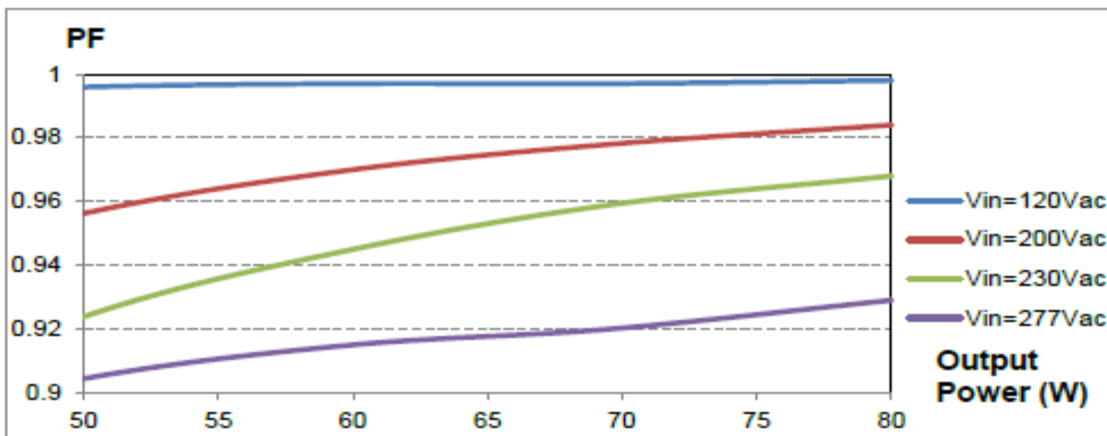


■ THD vs. Output Power

(@ 25°C)


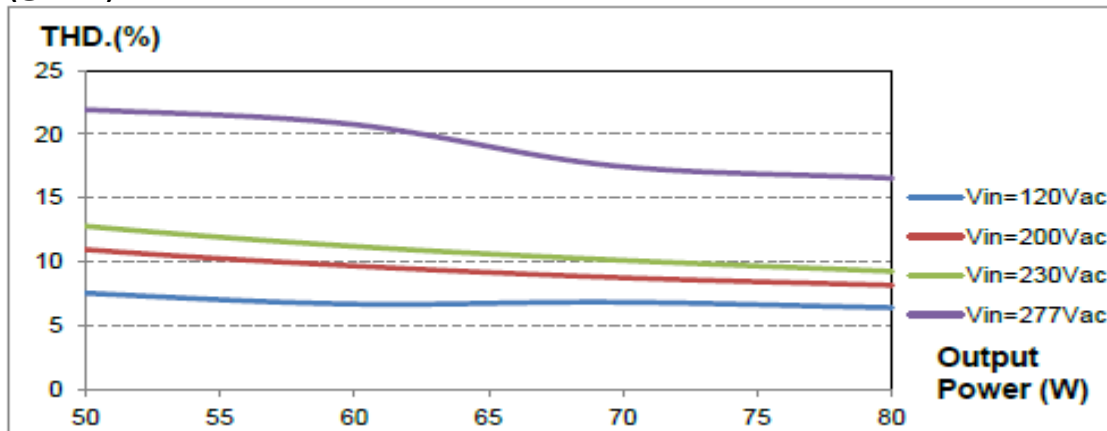


■ Efficiency vs. Output power


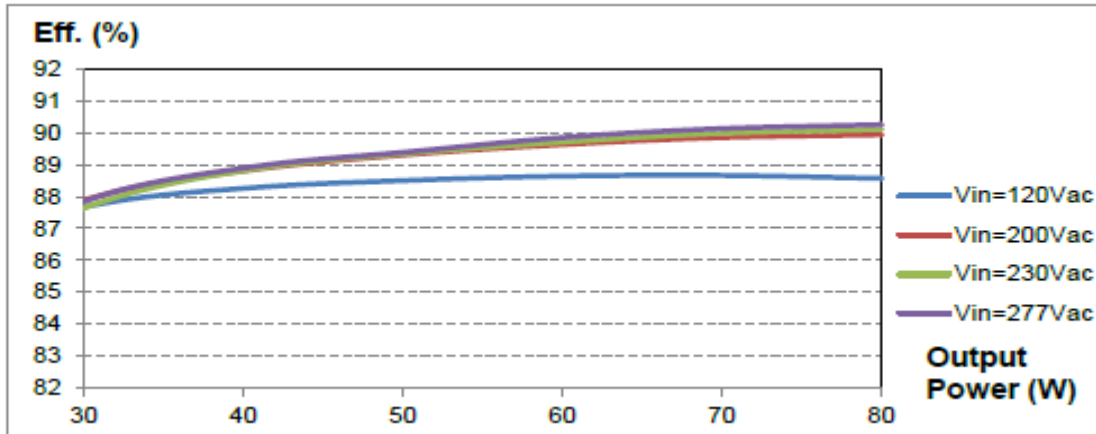


■ Dimming

Mode 1 : 1-10Vdc Input on Dimming Control

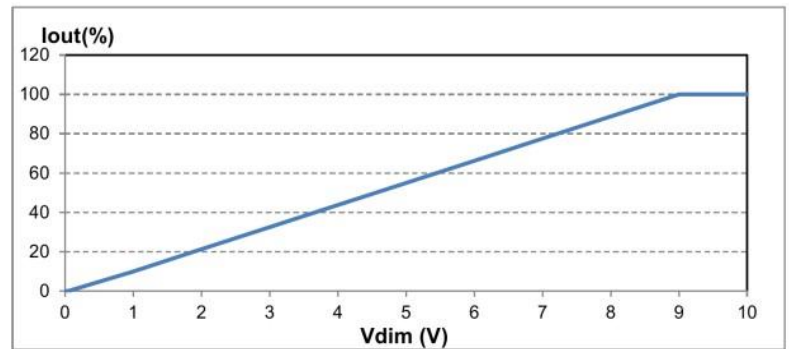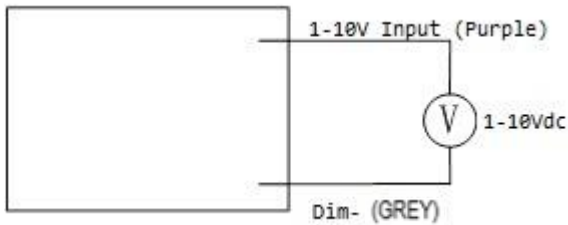


Mode 2 : Potentiometer on Dimming Control

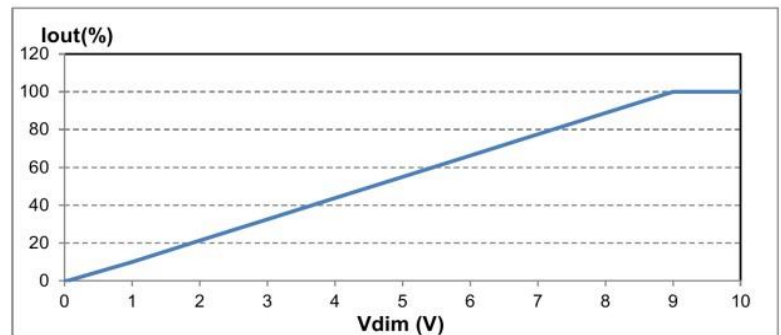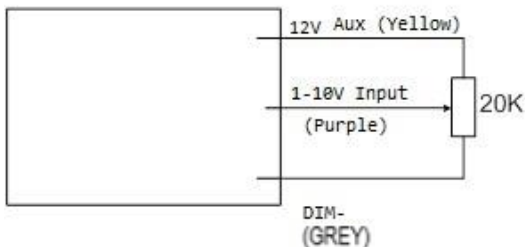


■ **Dimming(cont.)**

Mode 3 : PWM Signal on Dimming Wires

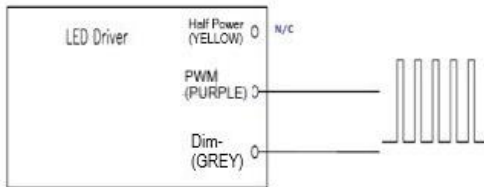


Io/Ir vs PWM Duty

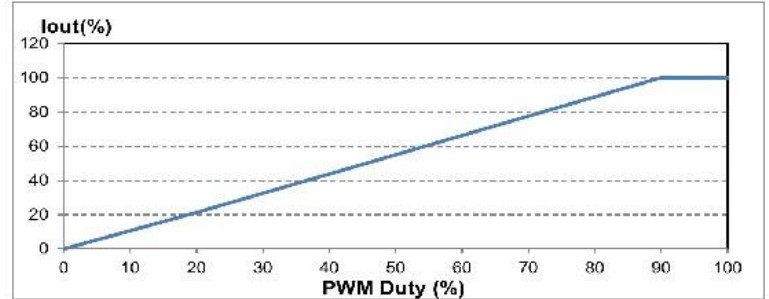

Parameter	Values	Conditions
Input Voltage	0~10 V	Purple wire.
Input Current	10 mA	
PWM Frequency	0.5 ~ 3 kHz	
PWM Pulse Width	10%~100%	

Mode 4 : Timer Dimming (Does not require dimming wires)

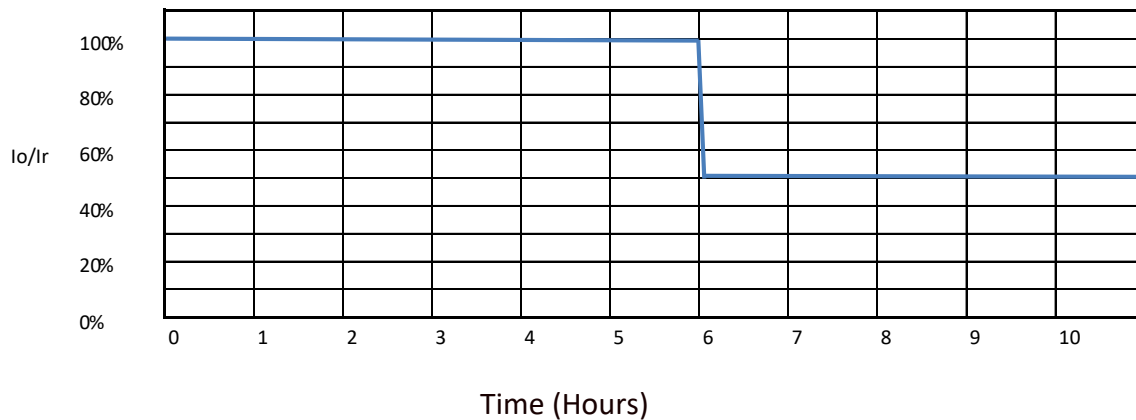


Standard power/time combination above, can be factory set to customer specification. Recycle AC to restart timer.

NOTE:

1. If the dimming function is not used, cap the dimming wires and don't use them.
2. I_o is actual output current and I_r is rated current without dimming control.
3. For the driver to operate properly, the load voltage must be maintained above the minimum voltage threshold, approximately 50% of the max. output voltage for any given mode.
4. The dimming signal can be less than 1V, when it is 0-1V, the output current can maintain about 10% I_r , however, the connected LEDs may flicker. Maintain dimming voltage greater than 1V in the application is strongly recommended.
5. Pulse width less than 10% will cause the driver to work improperly.

■ Mechanical Design

L4WVD080SXXXST-20

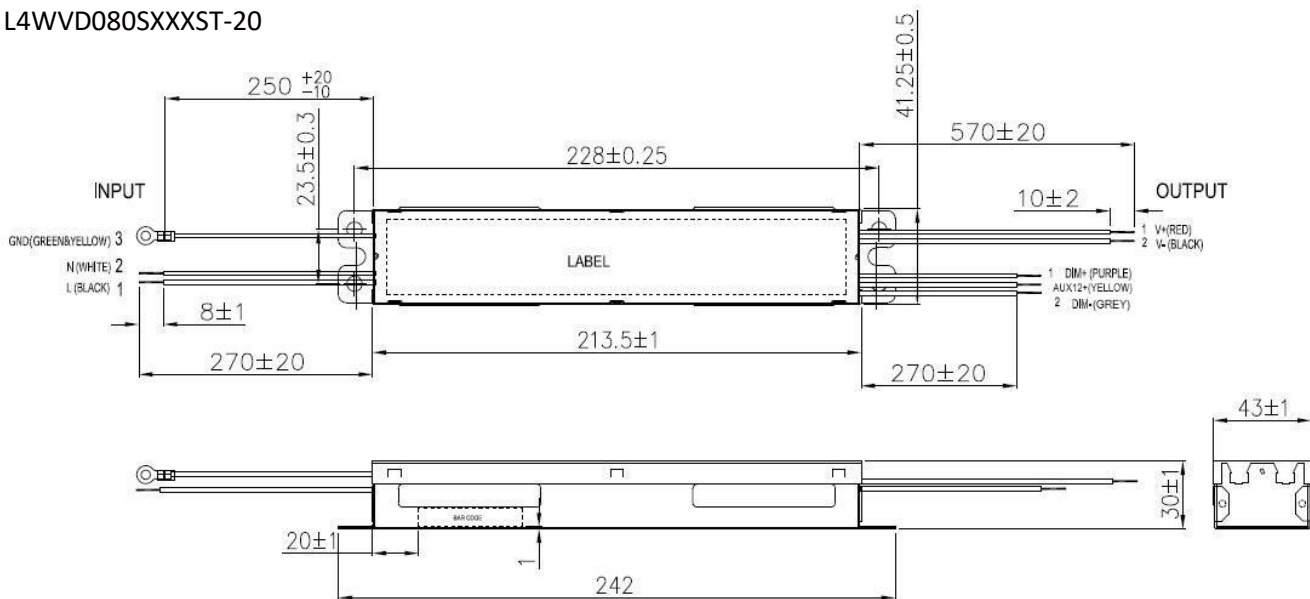


- Notes:
1. Outline Dimension: 242*43*30
 2. Input and Output Connector and Pin Assignment
 3. The Yellow Dimming wire is optional for 12V Auxiliary Power

Input Wire	3/#18AWG	L= Black, N=White, GND=Green
Output	2/#18AWG	V+ is Red, V- is Black
Dimming Wire	3/#22AWG	Dim + is Purple, Dim Return is Grey, AUX12V+/100mA is yellow


■ **Mechanical Design(cont.)**

L4WV-080SXXXST-20

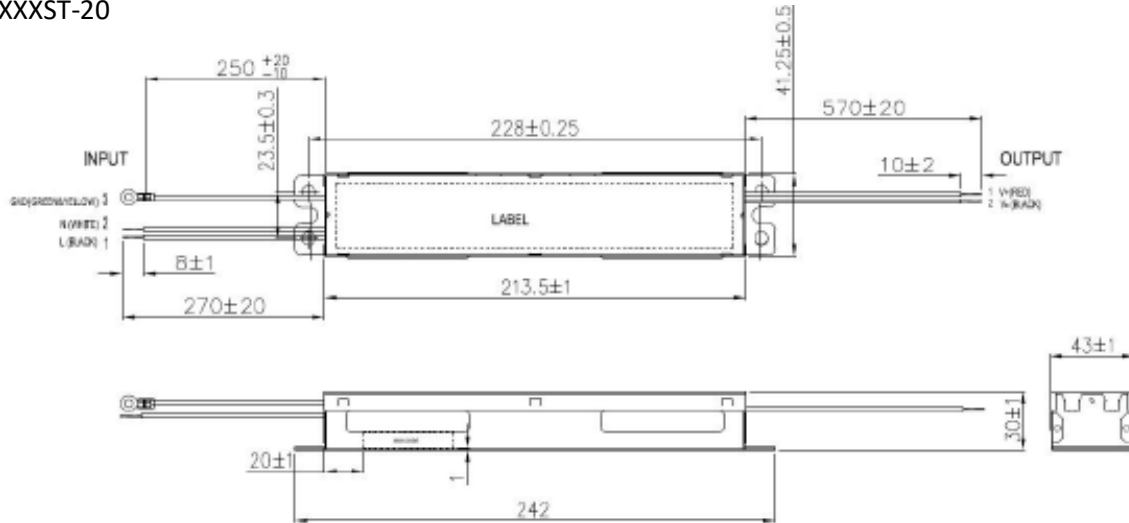


- Notes: 1. Outline Dimension: 242*43*30
2. Input and Output Connector and Pin Assignment

Input Wire	3/#18AWG	L= Black, N=White, GND=Green
Output	2/#18AWG	V+ is Red, V- is Black

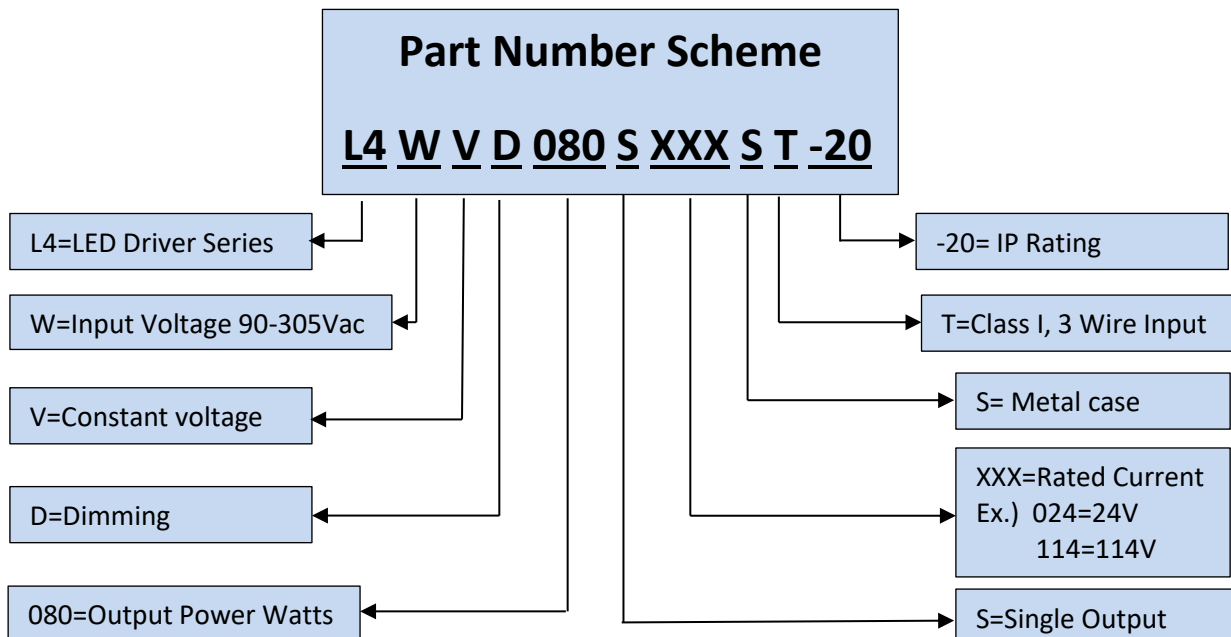

Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com
31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

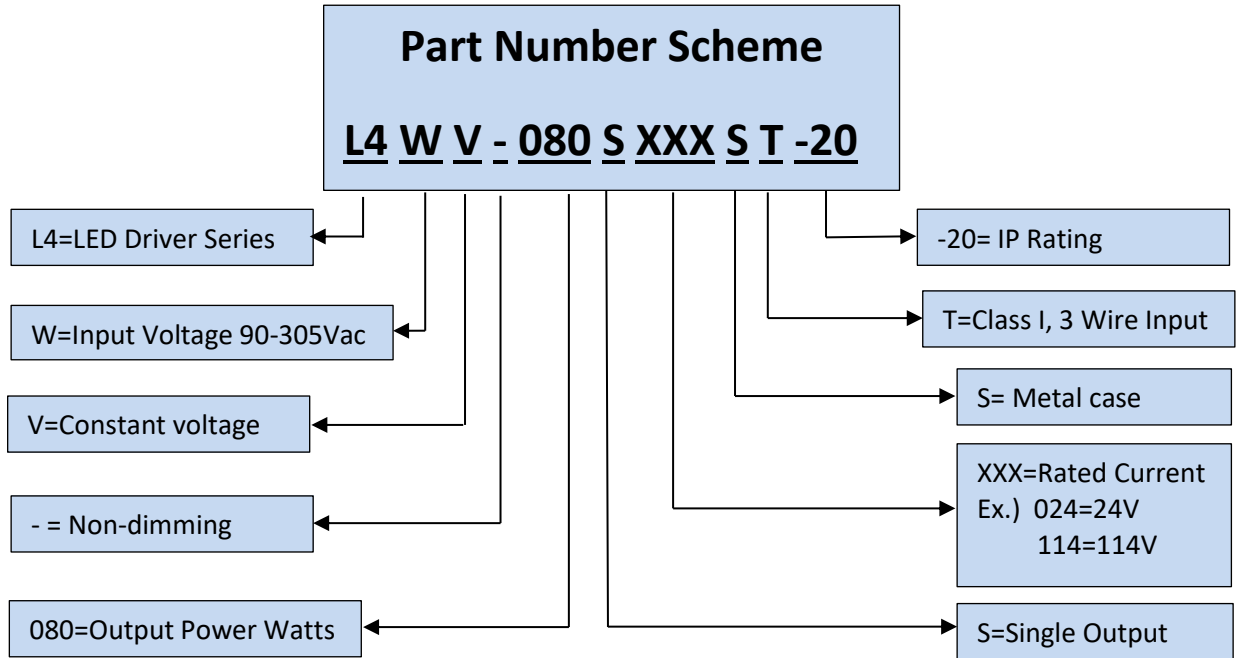

***Product images are for illustrative purposes only and may vary from actual design.**

***Specifications are subject to change without notice. Autec is not responsible for issues arising from errors or omissions.**