

■ Features

- Power Rating: 80W
- Input Voltage: 120-277Vac
- Constant current design
- Output current (1000-2000mA)
- Output current selectable through DIP Switch
- Efficiency up to 88%
- SCP, OCP
- 3 in 1 Dimming 0-10V/PWM/Timer dimming
- 0-100% dimming range, Dim-to-off
- Optional 12V/50mA Aux
- DALI Dimming Available(Contact Autec Sales)
- SELV output design
- IP20
- 5-year warranty



*Product images are for illustrative purposes only and may vary from actual design.

■ Application

- Indoor or Outdoor lights

■ Model List*(See part number scheme for model number details)

Model Number	Input Voltage Range	Output Power	Output Voltage	Output Current Min.	Output Current Max.	Efficiency 120/277Vac	Certification
LFWCD082S150ST-Lb	120-277Vac	80W	27-54V	1500mA	1500mA	87%/89%	UL/cUL
LFWCD082S160ST-Lb	120-277Vac	80W	27-54V	1600mA	1600mA	87%/89%	UL/cUL
LFWCD082S180ST-Lb	120-277Vac	80W	27-54V	1800mA	1800mA	87%/89%	UL/cUL
LFWCD082S190ST-Lb	120-277Vac	80W	27-54V	1900mA	1900mA	87%/89%	UL/cUL
LFWCD082S200ST-Lb	120-277Vac	80W	27-54V	2000mA	2000mA	87%/89%	UL/cUL
LFWCP082S200ST-Lb*	120-277Vac	80W	27-54V	1000mA	2000mA	87%/89%	UL/cUL

*DIP Switch Model with selectable output current

■ Technical Data

Input Voltage	120-277Vac
Input Frequency	47-63Hz
Input Current	1000mA Max.@120-277Vac, 100% load
Inrush current	60Amax. @230Vac, 25°C
Power Factor	PF>0.9@120Vac/230Vac/277Vac, 100% load
THD	<20%@115Vac/230Vac/277Vac, 100% load
Voltage accuracy	5%
No load voltage	2Wmax.
Efficiency	87%@120-277Vac & 100% load
Output Voltage	27-54V

Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

November 25, 2019

■ **Technical Data(cont.)**

Ripple and Noise	500mVp-p
Line regulation	3% _{lo}
Load regulation	3% _{lo}
Turn On Delay Time	Under normal conditions, the maximum delay time is 1s
Short-Circuit Protection	The Driver's input power will decrease to less than 5W, when short circuit occurs. The driver will auto-recover when the fault is removed
Open Circuit Protection	When the maximum output voltage is reached, will enter hiccup mode and will go into self-recovery after fault condition is removed.
Operating Temperature	-25°C to +50°C
Relative Humidity	10%-90%
Storage Temperature	-30°C to 70°C
Storage Humidity	10%-90%, non-condensing (Sea level to 2,000m)
Altitude	Sea level to 2000m
Vibration	10 to 500HZ Sweep at constant acceleration of 1.0G (depth: 3.5mm) for 1 hour for each of the perpendicular axes X, Y,Z
Leakage Current	<0.25mA
Lifetime	≥ 5 Years@230Vac, 100% load
MTBF	≥200,000 hours@25°C @230Vac, 80% load (MIL-HDBK-217F)
Weight	290g
Dimensions	374x30x23.45mm
Packing	40pcs/carton; carton dimensions: 390x360x165mm

Notes:

1. The parameters above including the power factor, THD, efficiency are all tested under the ambient temperature 25C and humidity 50%, AC input 2330Vac and 90% output load.
2. I_o is rated output current

■ **Safety Compliance**

Safety	GB19510.1, GB19510.14; EN61347-1, EN61347-2-13; UL8750, CSA C22.2No.250.13-12
Insulation Resistance	Input to Output >50M Ohms/500Vdc/25°C/70%RH
Dielectric Strength Hi-Pot	Primary to Secondary: 3750; 5mA; 60S
	Primary to Earth: 1500; 5mA; 60S
	Secondary to Earth: 500; 5mA; 60S
EMI Compliance	GB17743, GB17625.1; EN55015, EN61000-3-2, EN61000-3-3
EMS Compliance	EN61000-4-2,3,4,5,6,8,11, EN61547
ESD	Severity Level 3/3 ±8KV, Severity Level 2/2 ±4KV
RF	80-1000MHZ; Severity Level 2/2 3V/M Performance Criterion A
EFT	Severity Level 2/2 1KV
Surge Immunity	Severity Level 2/2 1KV, Severity Level 3/3 2KV, Performance Criterion B

Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

November 25, 2019

Disclaimer:

Autec Power Systems' (Autec) LED Drivers are Hi-Pot tested during the manufacturing process. Autec assumes no responsibility for secondary Hi-Pot testing at customer location or designated production line(s). Should customer require further Hi-Pot testing, at their own production line, following assembly of the LED Driver into the customer's assembled fixture, Autec requests advance notice. This request must be communicated to Autec in a timely manner and is recommended to be requested at time of issuing each purchase order.


■ Dimming Feature

Dimming Function			0-10V			PWM			RX			
			✓			✓			✓			
0-10V	0	1	2	3	4	5	6	7	8	9	10	open
Ir	0	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	open
PWM	0	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	open
Ir	0	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	98.5%


Notes:

1. Ir is the output current percentages.
2. Ir above is typical values.


■ Efficiency vs. Load

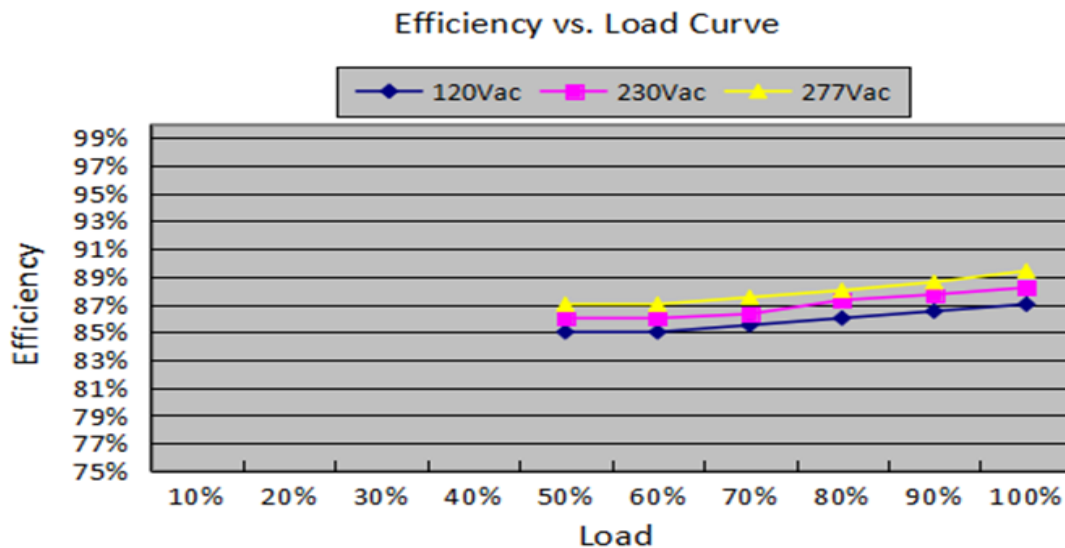


■ Power Factor vs. Load

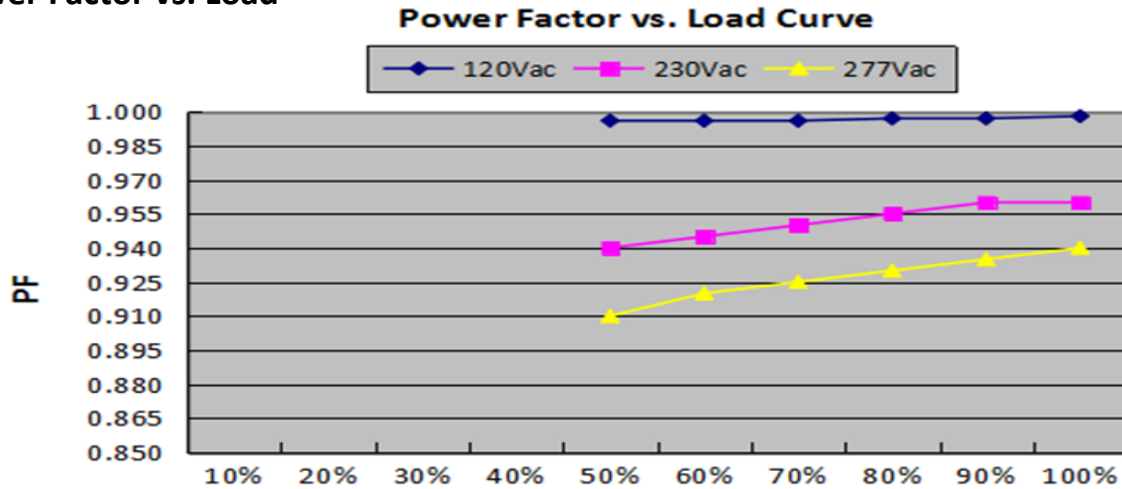

■ THD vs. Load

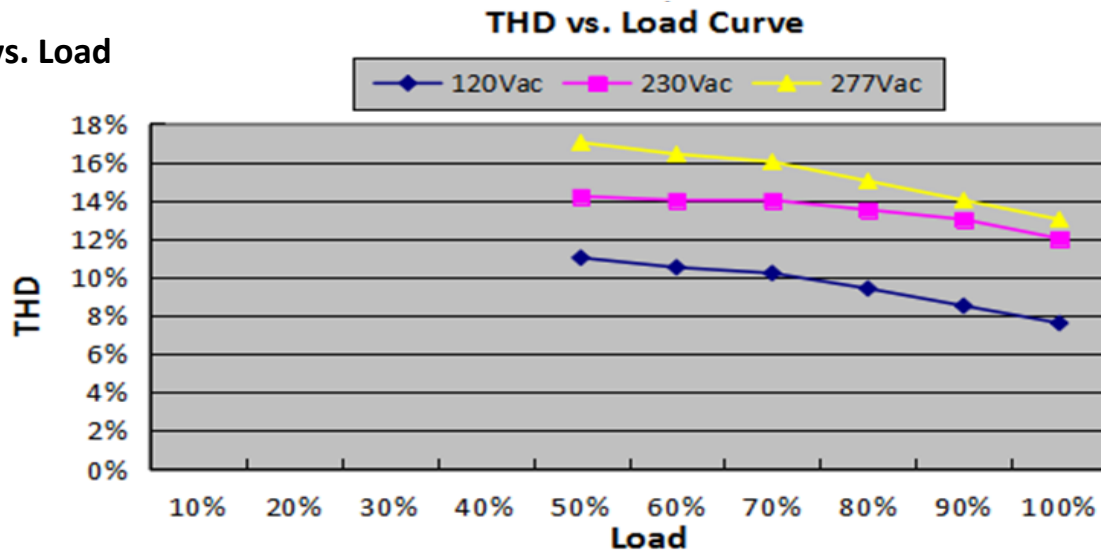

■ Lifetime vs Tc


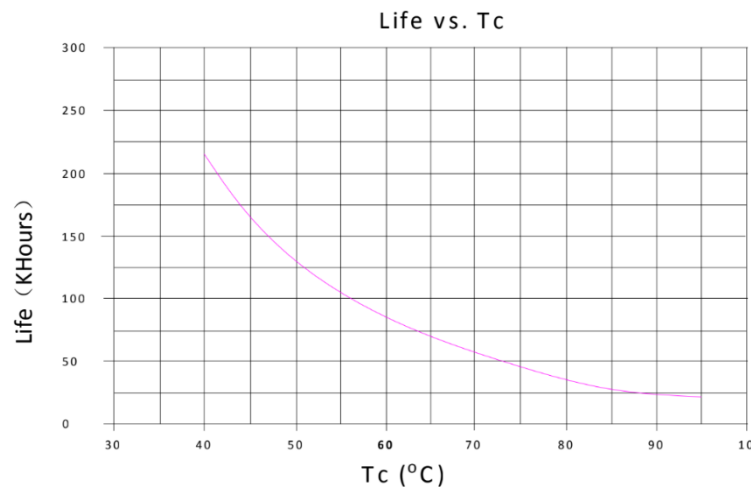


Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

November 25, 2019

■ **Mechanical Diagram**

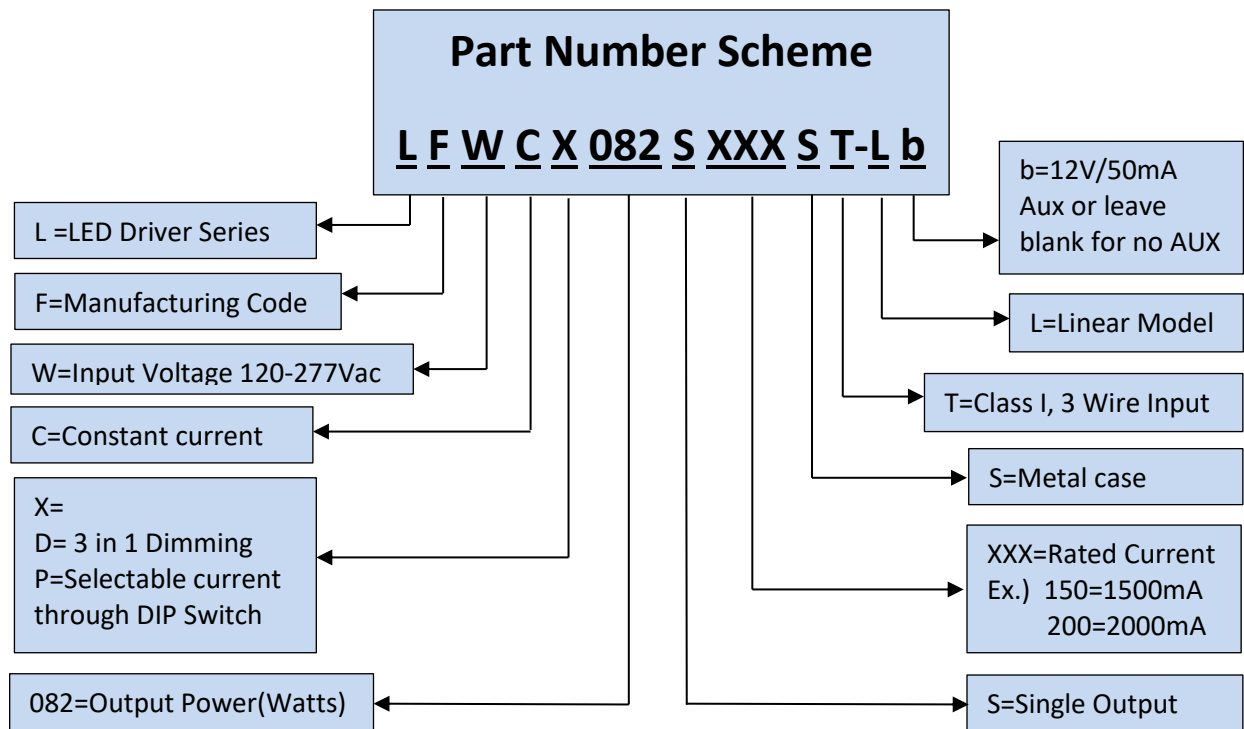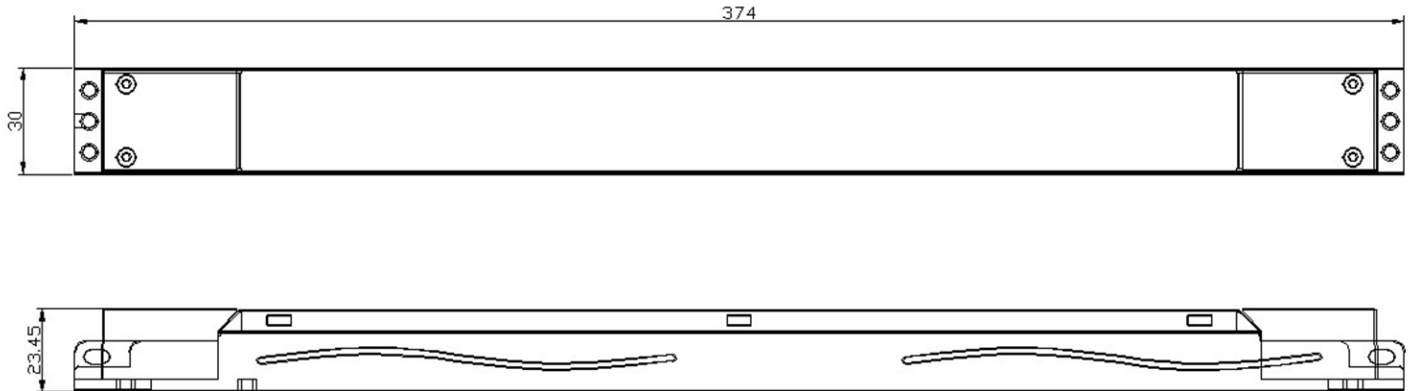

***Product images are for illustrative purposes only and may vary from actual design.**

***Specifications are subject to change without notice. Autec is not responsible for issues arising from errors or omissions.**

Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

November 25, 2019