

■ Features

- Power Rating: 72W
- Input Voltage: 120-277Vac $\pm$ 10%
- Constant current design
- Fixed output current(660mA-1200mA)
- Efficiency to 83%
- Dimming: 0-10V
- UL Class 2, Class P, Type HL
- OVP, OCP, and SCP
- IP20
- 5-year warranty
- Metal case



*Product images are for illustrative purposes only and may vary from actual design.

■ Application

- Indoor or outdoor lights

■ Model List*(See part number scheme for model number details)


Model Number	Input Voltage Range	Output Power	Output Voltage	Output Current Min.	Output Current Max.	Efficiency	Certification
LXWCD072D066SS-20	120~277Vac $\pm$ 10%	36Wx2	27-54V	660mA	660mA	82% @120V 83% @240V 83% @277V	UL/-
LXWCD072D070SS-20	120~277Vac $\pm$ 10%	36Wx2	26-51V	700mA	700mA	82% @120V 83% @240V 83% @277V	UL/-
LXWCD072D080SS-20	120~277Vac $\pm$ 10%	36Wx2	23-45V	800mA	800mA	82% @120V 83% @240V 83% @277V	UL/-
LXWCD072D090SS-20	120~277Vac $\pm$ 10%	36Wx2	20-40V	900mA	900mA	82% @120V 83% @240V 83% @277V	UL/cUL
LXWCD072D100SS-20	120~277Vac $\pm$ 10%	36Wx2	18-36V	1000mA	1000mA	82% @120V 83% @240V 83% @277V	UL/cUL
LXWCD072D110SS-20	120~277Vac $\pm$ 10%	36Wx2	16-33V	1100mA	1100mA	82% @120V 83% @240V 83% @277V	UL/cUL
LXWCD072D120SS-20	120~277Vac $\pm$ 10%	36Wx2	15-30V	1200mA	1200mA	82% @120V 83% @240V 83% @277V	UL/cUL

Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

June 13, 2019

■ Wiring Diagram

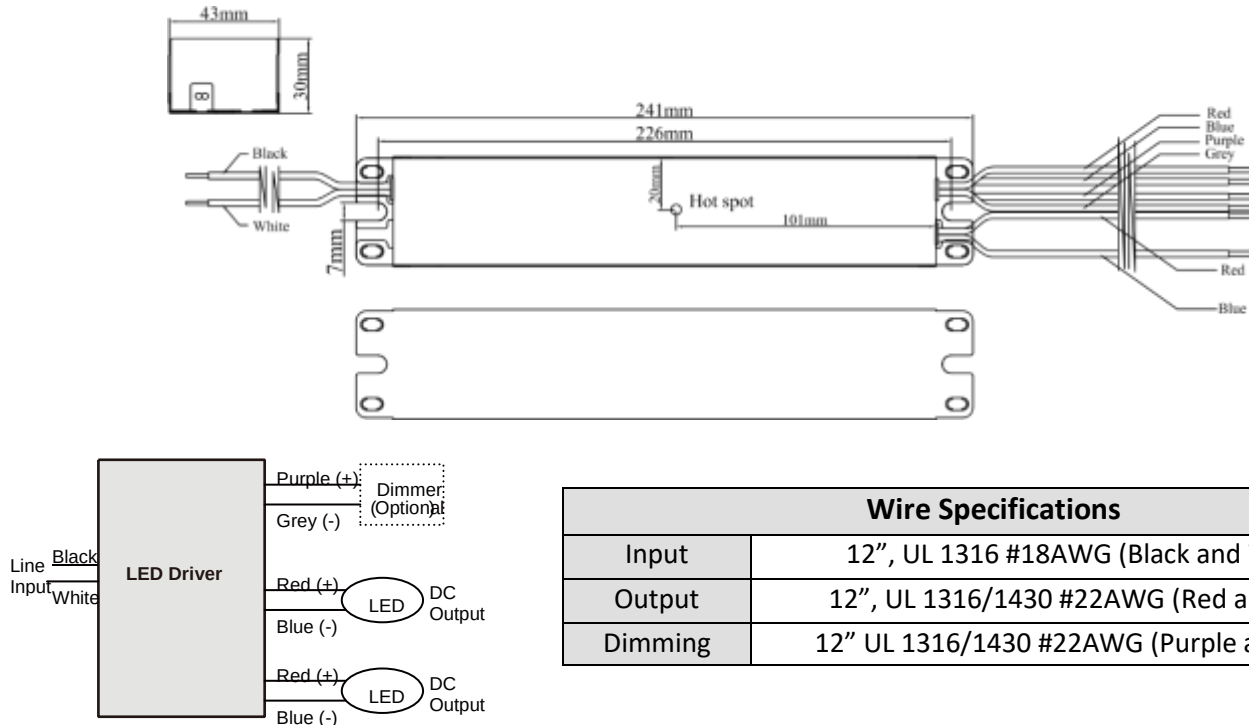

■ Technical Data

Input voltage range	120~277Vac $\pm$ 10%
Frequency	50/60Hz
Power factor	> 0.9 under 120~277Vac input with 80~100% load condition (for all output currents)
Inrush current	30A @120V
Max input current	0.80A @120V, 0.40A @240V, 0.35A @277V
THD	< 20% under 120~277Vac input with 80~100% load condition (for all output currents)
Load Regulation	$\pm$ 2%
Line Regulation	$\pm$ 1%
Current Tolerance	$\pm$ 5% at full load condition
Turn-on Delay Time	< 1s at full load condition
Overshoot	< 10% at full load condition
No Load Power Consumption	<1.5W
Ripple & Noise (pk-pk)	<3%
Withstand voltage	Input to output, 2,800Vdc, 2mA
Leakage current	Maximum 0.5mA at 277Vac, 60Hz input

Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

June 13, 2019

■ Technical Data(cont.)

Protection	Over voltage protection: Hiccup mode. Protection will trigger when load voltage exceeds specified output voltage and will auto recover after the fault mode is removed. Over current protection: Hiccup mode. Protection will trigger when load current exceeds specified output current and will auto recover after the fault mode is removed. Short circuit protection: Hiccup mode. Protection will trigger when short circuit and will auto recover after the fault mode is removed.
Operating temperature	-40 to 60°C
Storage temperature	-40 to 85°C
Humidity	5% to 95%
MTBF	274,000 hours at 40°C ambient (~70°C case temp)
Life rating	60,000 hours at 120Vac input, 100% load and 60°C case temp
Maximum case Temperature	80°C
Length (L)	9.50" (241mm)
Width (W)	1.70" (43mm)
Height (H)	1.15" (30mm)
Mounting (M)	8.90" (226mm)
Packing	0.6kg/unit; 30pcs/carton; 1,200pcs/pallet


■ Safety Compliance

UL/cUL	UL 8750, Class P, Type HL
CE	EN61347-1, EN61347-2-13
FCC, 47CFR Part 15	ANSI C63.4:2009 Class A (Non-Consumer Limit)
EN61000-3-2	Harmonic Current Emissions Class C


Disclaimer:

Autec Power Systems' (Autec) LED Drivers are Hi-Pot tested during the manufacturing process. Autec assumes no responsibility for secondary Hi-Pot testing at customer location or designated production line(s). Should customer require further Hi-Pot testing, at their own production line, following assembly of the LED Driver into the customer's assembled fixture, Autec requests advance notice. This request must be communicated to Autec in a timely manner and is recommended to be requested at time of issuing each purchase order.


■ Lifetime vs Case Temperature

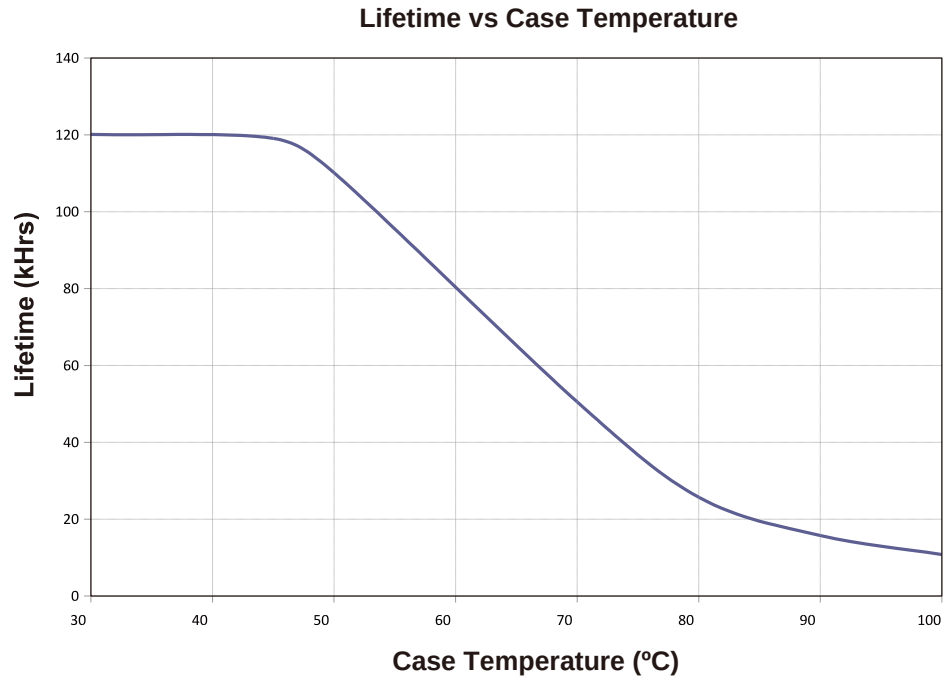


■ Power Derating vs Case Temperature

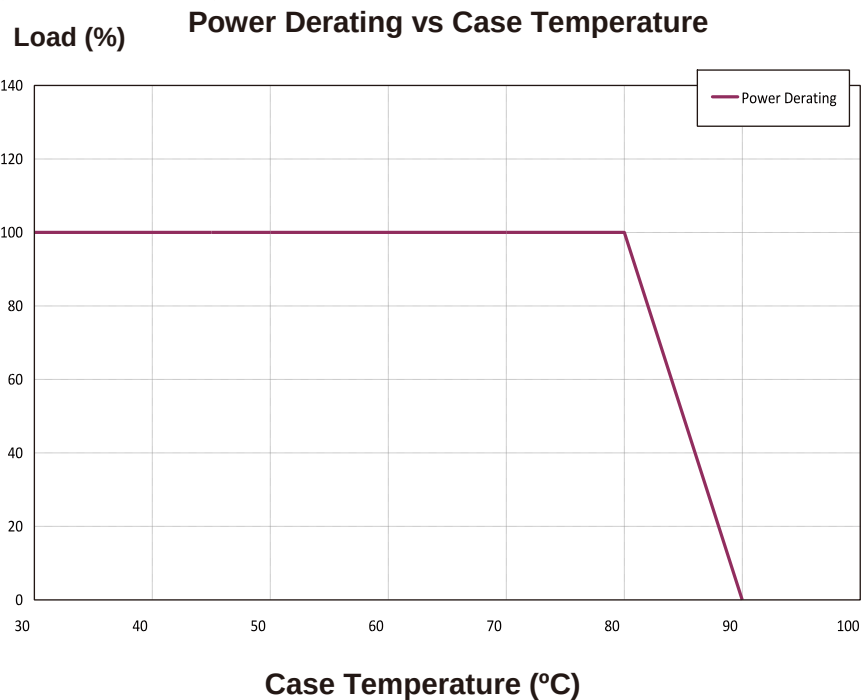


■ **Power Factor vs Load**

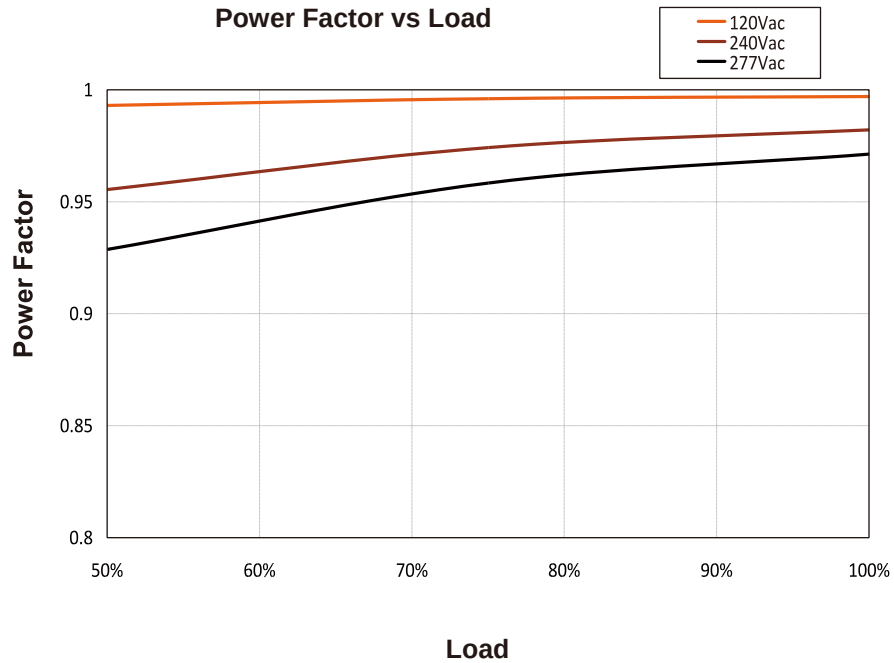

■ **Efficiency vs Load**

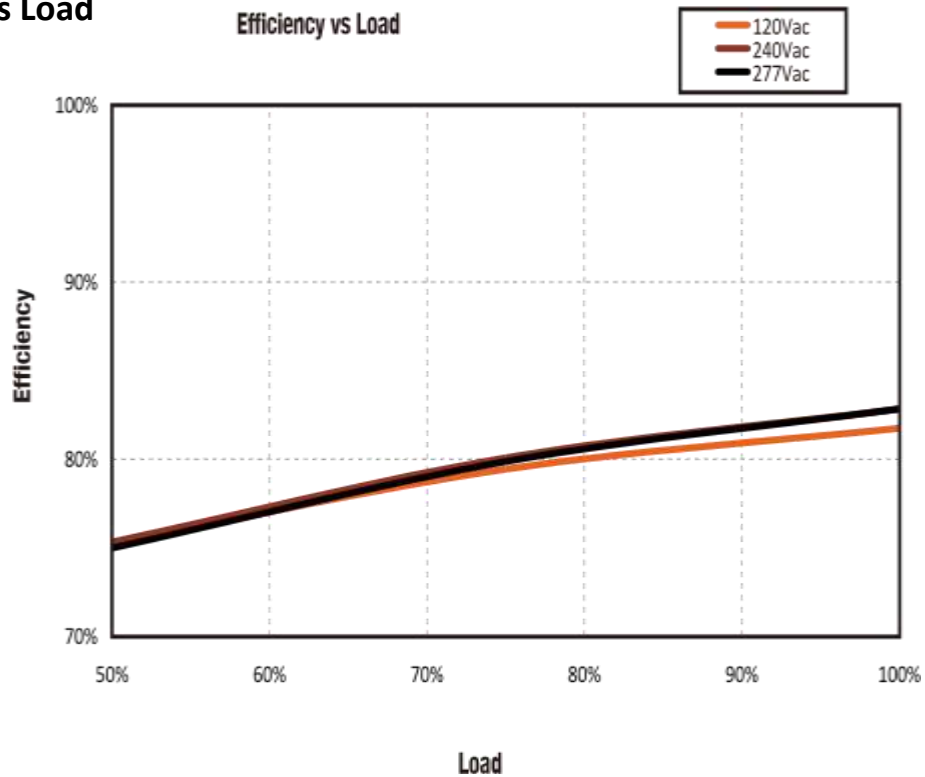

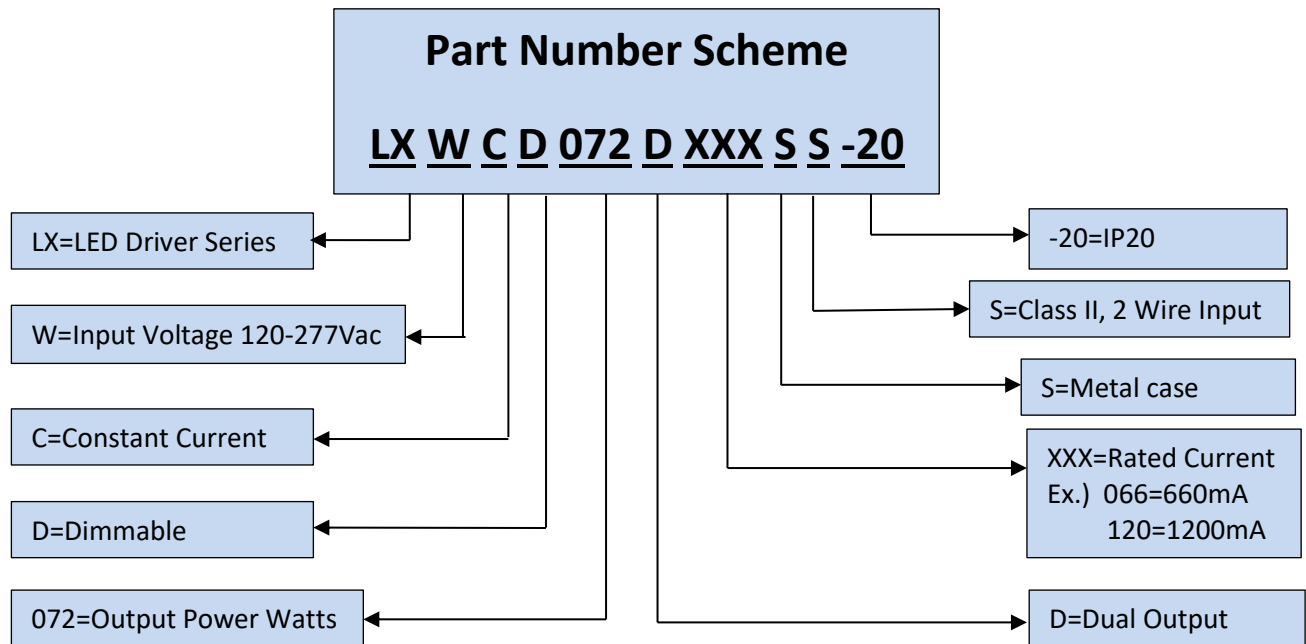

***Product images are for illustrative purposes only and may vary from actual design.**

***Specifications are subject to change without notice. Autec is not responsible for issues arising from errors or omissions.**