

■ Features

- Power Rating: 150W
- Input Voltage: 120-277Vac $\pm$ 10%
- Constant voltage design
- Fixed output current(0-4000mA)
- Efficiency to 92%
- UL, Type HL, Type TL
- OCP, OVP, and SCP
- IP20
- 5-year warranty
- Sign Components Manual (SAM)



*Product images are for illustrative purposes only and may vary from actual design.

■ Application

- Indoor lights
- Electric signs
- Hazardous locations

■ Model List*(See part number scheme for model number details)

Model Number	Input Voltage Range	Output Power	Output Voltage	Output Current Min.	Output Current Max.	Efficiency	Certification
LXWV-150S012ST-20	120~277Vac $\pm$ 10%	150W	12V	0mA	12500mA	89%@120V 91%@240V 91%@277V	-/-
LXWV-150S024ST-20	120~277Vac $\pm$ 10%	150W	24V	0mA	6250mA	90%@120V 92%@240V 92%@277V	UL/cUL

■ Technical Data

Input voltage range	120~277Vac $\pm$ 10%
Frequency	50/60Hz
Power factor	> 0.9 @120V-277Vac input with 80-100% load condition
Inrush current	40A @230V
Max input current	1.54A @120V, 0.80A @240V, 0.69A@277V
THD	< 20%
Load Regulation	$\pm$ 2%
Line Regulation	$\pm$ 1%
Voltage Tolerance	$\pm$ 5% at full load condition
Turn-on Delay Time	< 2s at full load condition
Overshoot	< 10% at full load condition
No Load Power Consumption	< 2W
Ripple & Noise (pk-pk)	< 3%

Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

June 14, 2019

1 / 5

■ Technical Data (cont.)

Protection	Over voltage protection: Hiccup mode. Protection will trigger when load voltage exceeds specified output voltage and will auto recover after the fault mode is removed. Over current protection: Hiccup mode. Protection will trigger when load current exceeds specified output current and will auto recover after the fault mode is removed. Short circuit protection: Hiccup mode. Protection will trigger when short circuit and will auto recover after the fault mode is removed.
Withstand voltage	Input to output, 2,800Vdc, 2mA
Leakage current	Maximum 0.5mA at 277Vac, 60Hz input
Operating temperature	-40 to 60°C
Storage temperature	-40 to 85°C
Humidity	5% to 95%
MTBF	182,000 hours at 40°C ambient (~70°C case temp)
Life rating	85,000 hours at 120Vac input, 100% load and 60°C case temperature
Maximum case Temperature	90°C
Length (L)	9.50" (241mm)
Width (W)	1.80" (47mm)
Height (H)	1.37" (35mm)
Mounting (M)	8.79" (223mm)
Packing	0.6kg/unit; 25pcs/carton; 900pcs/pallet

■ Safety Compliance

UL/cUL	UL 8750, UL879
CE	EN61347-1, EN61347-2-13
FCC, 47CFR Part 15	ANSI C63.4:2009 Class B (Consumer Limit)
EN61000-3-2	Harmonic Current Emissions Class C

Disclaimer:

Autec Power Systems' (Autec) LED Drivers are Hi-Pot tested during the manufacturing process. Autec assumes no responsibility for secondary Hi-Pot testing at customer location or designated production line(s). Should customer require further Hi-Pot testing, at their own production line, following assembly of the LED Driver into the customer's assembled fixture, Autec requests advance notice. This request must be communicated to Autec in a timely manner and is recommended to be requested at time of issuing each purchase order.


Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com


June 14, 2019

2 / 5


■ Lifetime vs Case Temperature

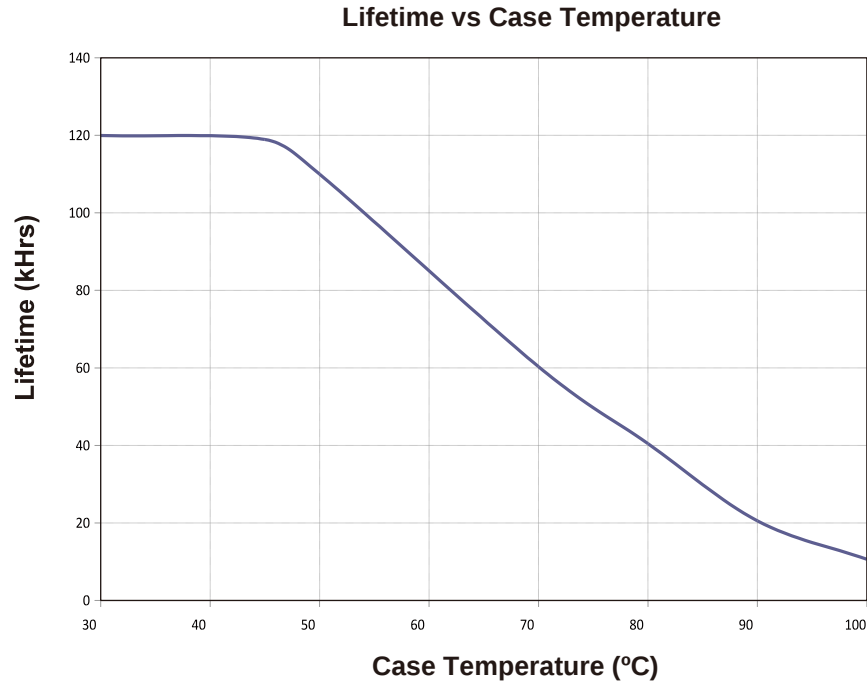


■ Power Derating vs Case Temperature

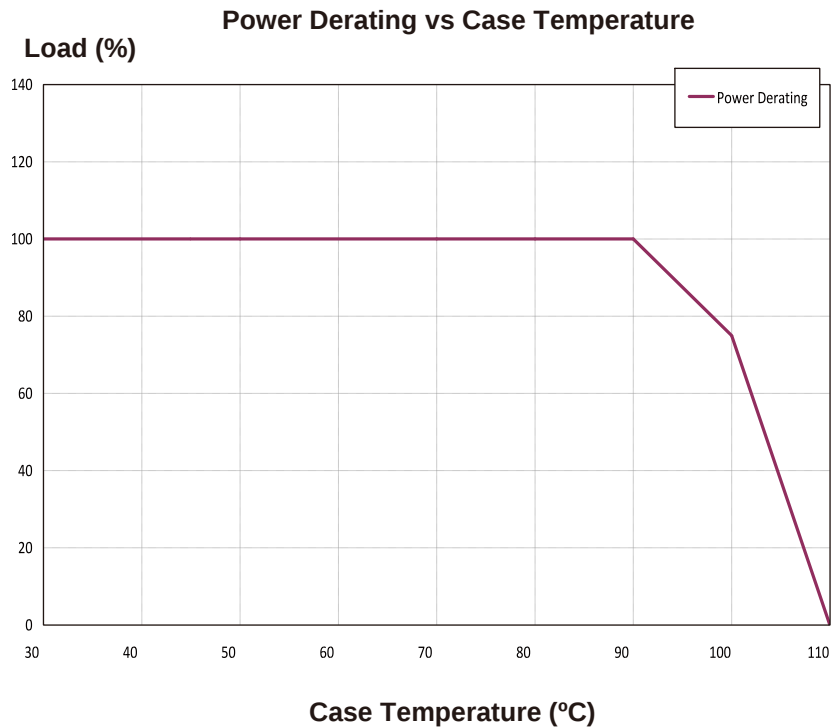


■ **Power Factor vs Load**

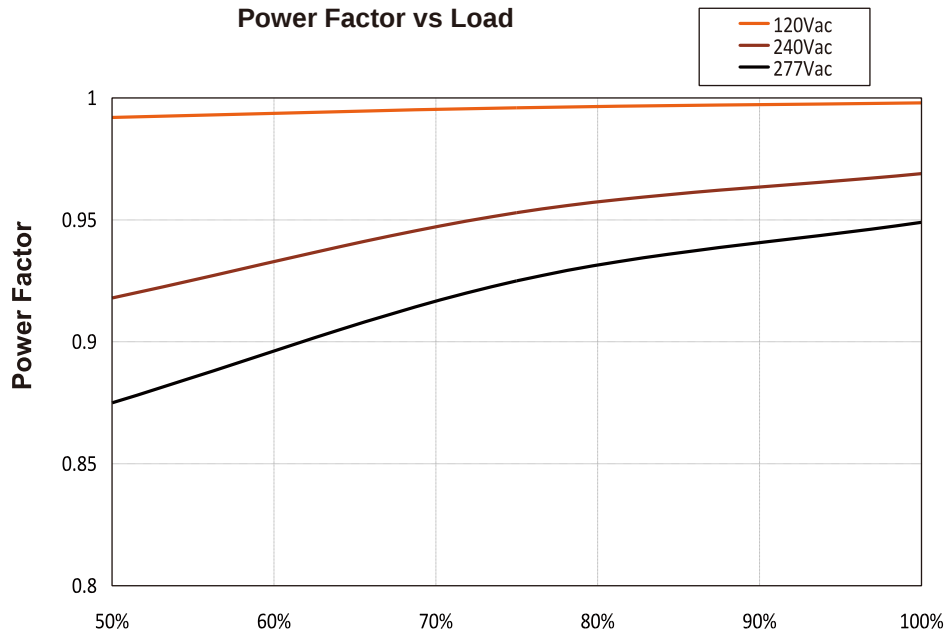



■ **Efficiency vs Load**

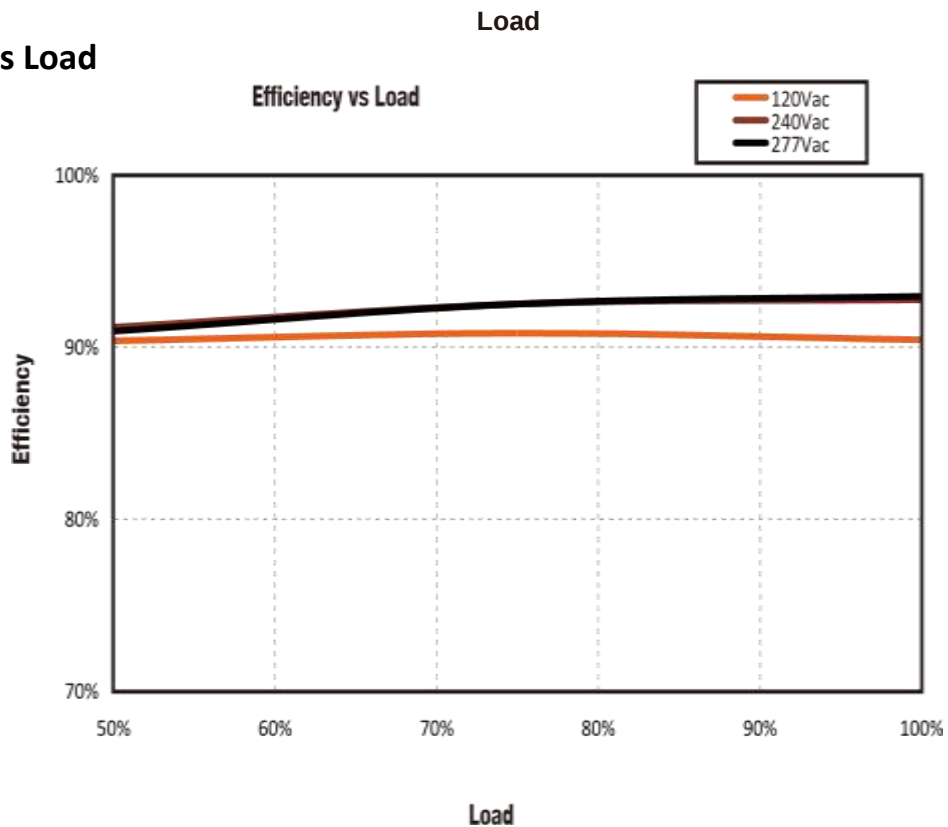

■ **Wiring Diagram**

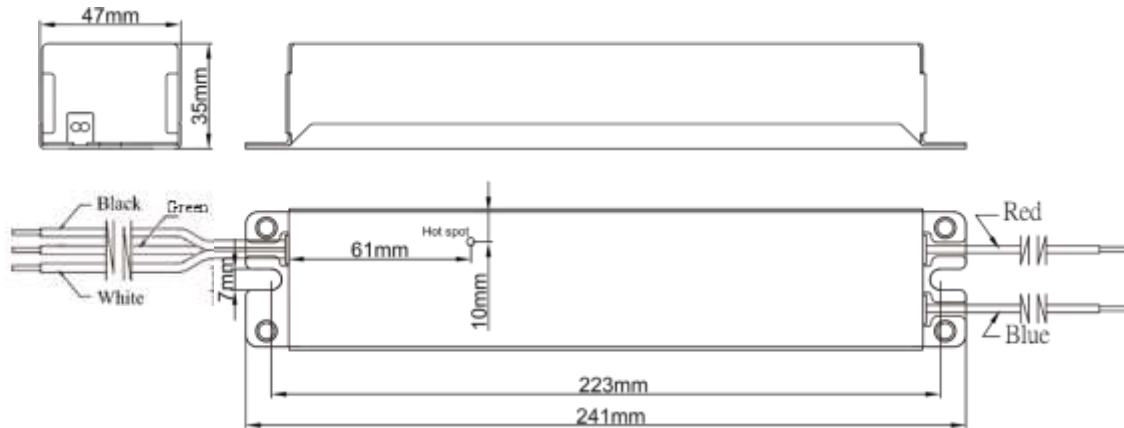

Wire Specifications	
Input	12", UL 1316 #18AWG (Black, White, and Green)
Output	12", UL 1316 #14AWG (Red and Blue)

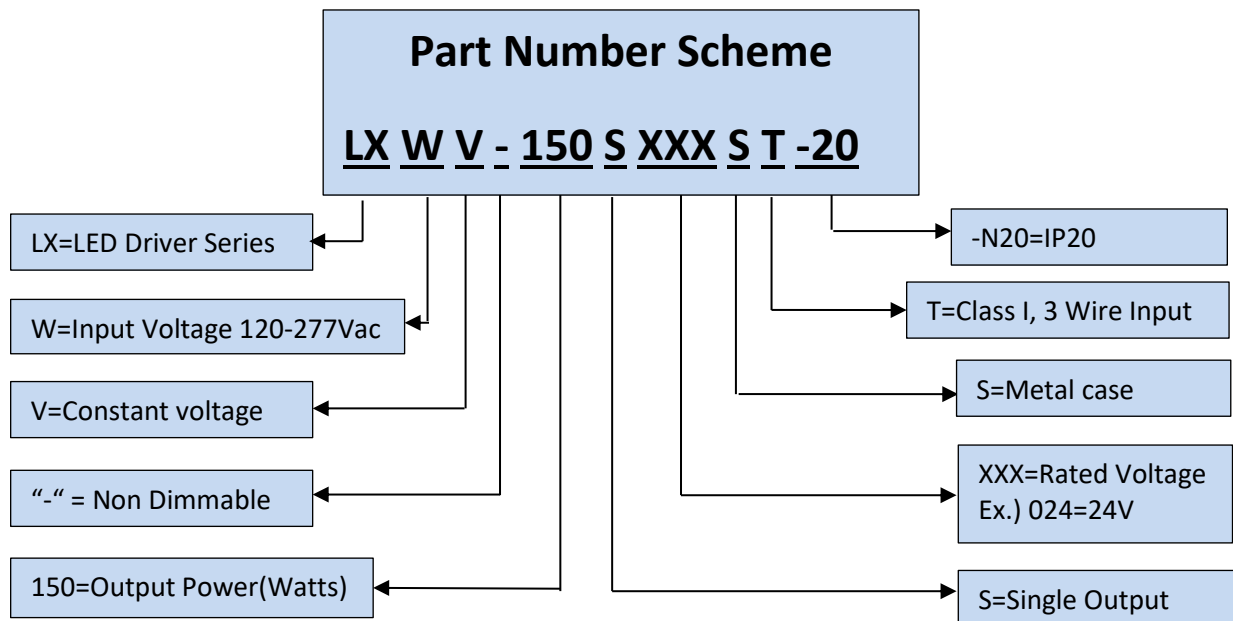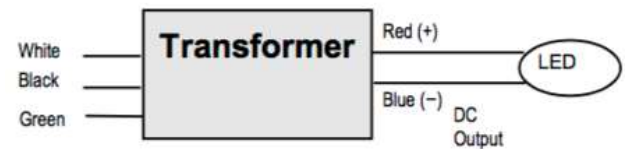

*Product images are for illustrative purposes only and may vary from actual design.

*Specifications are subject to change without notice. Autec is not responsible for issues arising from errors or omissions.

Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

June 14, 2019