

■ Features

- Single output to 60W
- 100-240Vac Universal input
- EN55032/EN55022/CISPR22 EMI Compatible
- Designed to meet UL60950
- Frequency: 50/60Hz
- OVP, OCP, OTP, and short circuit protection
- Efficiency: level VI
- QC3.0: Quick Charge 3rd edition
- PD2.0: Power Delivery 2nd edition
- USB-C output connector
- Case Temperature control
- Flipping A/C input plug
- Dimensions: 69x50x26mm (2.7"x1.9"x1")




*Product images are for illustrative purposes only and may vary from actual design.

■ Applications

- Personal electronic devices

■ Model List

Model	Output Voltage	Output Current	Power
W4M060-PD2-A	5V	2A	60W
	9V	2A	60W
	12V	2A	60W
	15V	3A	60W
	20V	3A	60W

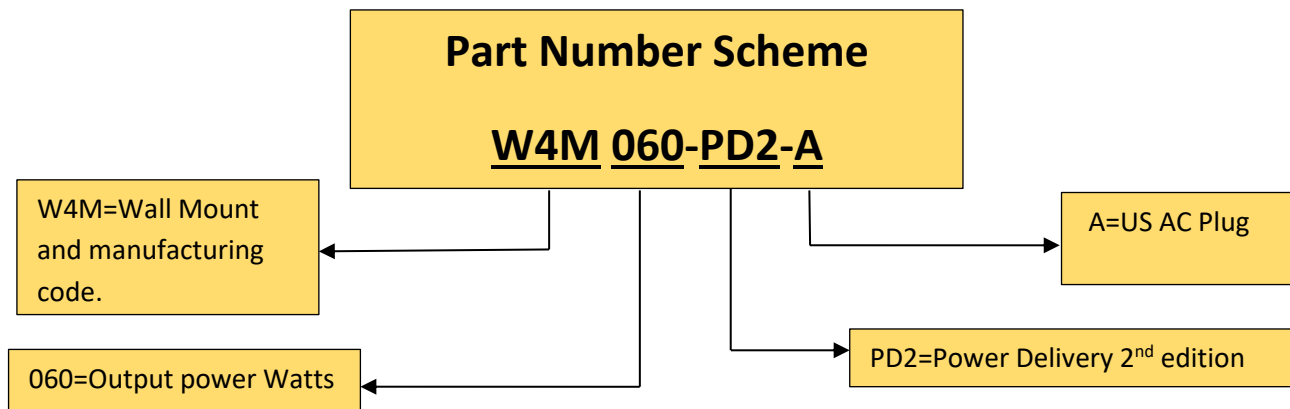

*Product images are for illustrative purposes only and may vary from actual design.

*Specifications are subject to change without notice. Autec is not responsible for issues arising from errors or omissions.

Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com
 31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com