

■ Features

- Single output from 20-36W
- 100-240Vac Universal Input
- Meet the standards: EN 60601-1-2, 3rd Ed, 4th EMC Ed. Medical
- Input frequency range: 47-63Hz
- Ripple and noise: 60-180mVp-p Max
- Means of protection: 2 X MOPP
- Efficiency level VI
- Interchangeable Plug types: US, EU, AU, UK
- Surge: 2kV
- Class 2 Output
- 2-year warranty
- Case size: 100x42x48mm



*Product images are for illustrative purposes only and may vary from actual design.


■ Application

- Medical equipment

■ Model List

Custom Designs Available!

Model	Output Voltage	Output Current	Power
WM-M036F-050I-TP1-XX	5V	4A	20W
WM-M036F-090I-TP1-XX	9V	4A	36W
WM-M036F-100I-TP1-XX	10V	3.5A	36W
WM-M036F-120I-TP1-XX	12V	3A	36W
WM-M036F-180I-TP1-XX	18V	2A	36W
WM-M036F-240I-TP1-XX	24V	1.5A	36W

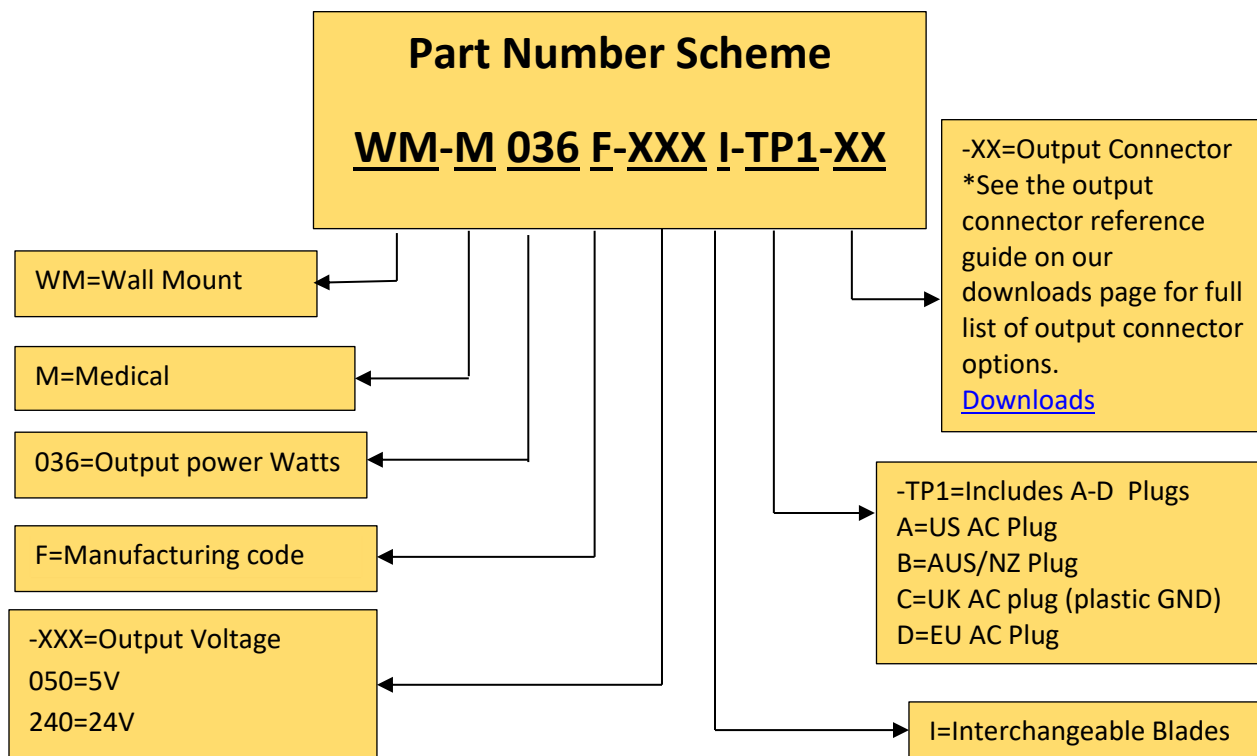

***Product images are for illustrative purposes only and may vary from actual design.**

***Specifications are subject to change without notice. Autec is not responsible for issues arising from errors or omissions.**