




1) Membrane, 2) LED orange, 3) LED green, 4) Cable length

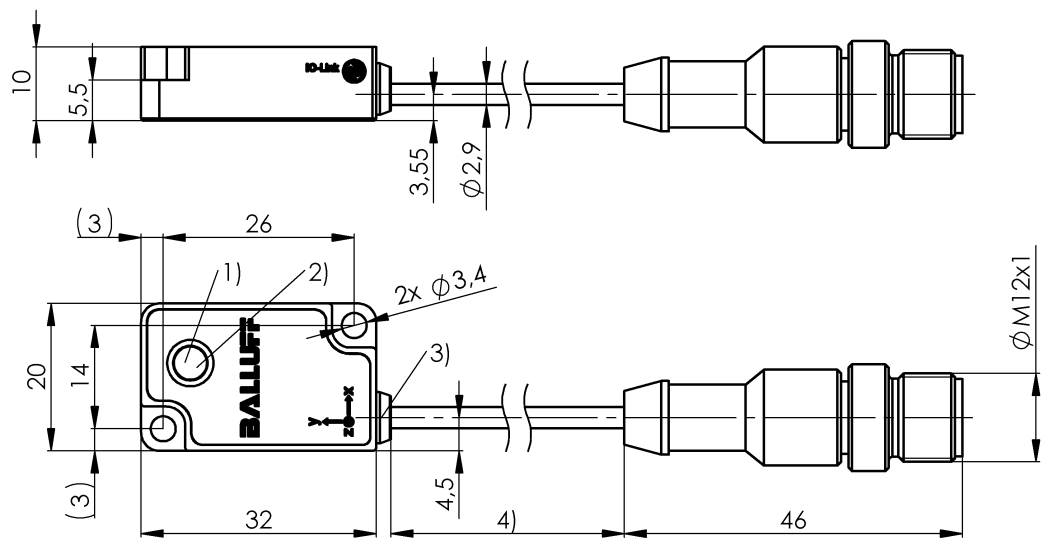

Basic features

Approval/Conformity	CE UKCA WEEE cULus
Function	Vibration Velocity Vibration Acceleration Vibration Severity Zone Contact temperature monitoring Relative Humidity Ambient Pressure Sensor Self-Awareness
Principle of operation	Condition Monitoring Sensors
Series	R15

Display/Operation

Display	Run - LED green Communication - LED green, slow flashing (1 Hz) Ping - LED green, asynchronous very fast flashing (4 Hz) and fast flashing (2 Hz) Event - LED orange, fast flashing (2 Hz)
---------	---

Electrical connection

Bending radius min., fixed cable	3 x D
Bending radius min., flexible cable	5 x D
Cable diameter D	2.9 mm +0.1/-0.05 mm
Conductor cross-section	0.14 mm ²
Connection	Cable with connector, M12x1- Male, 3-pin, 1.5 m, PUR
Number of conductors	3
Polarity reversal protected	yes
Protection against device mix-ups	yes
Short-circuit protection	yes

Electrical data

Current draw max.	10 mA
Operating voltage U _b	18...30 VDC
Protection class	III
Rated operating voltage U _e DC	24 V
Ready delay t _v max.	1.5 s

Environmental conditions

Ambient temperature	0...70 °C
EN 61000-4-2, ESD	Severity Level 2
EN 61000-4-3, RFI	Severity Level 3
EN 61000-4-4, Burst	Severity Level 4
EN 61000-4-6, High-frequency fields	Severity Level 3
IP rating	IP67
Storage temperature	-20...70 °C

Condition Monitoring Sensors
BCM R15E-002-DI00-01,5-S4
Order Code: BCM0002

BALLUFF

Function module ambient pressure

Ambient pressure, measuring range	300...1100 hPa
Ambient pressure, non-linearity	±0.1 % FS
Ambient pressure, resolution	0.15 hPa

Function module contact temperature

Contact temperature, measuring error	±2 % FS
Contact temperature, measuring range	0...70 °C
Contact temperature, non-linearity	±0.75 % FS
Contact temperature, resolution	0.1 °C
Contact temperature, settling time	5 min

Function module relative humidity

Relative humidity, measuring range	5...95 %rF
Relative humidity, non-linearity	±2.5 % FS
Relative humidity, resolution	1 %rF
Relative humidity, settling time	5 min

Function module vibration

Vibration, Evaluation values time domain	RMS
	Peak to Peak
	Max
	Crest Factor
	Skewness
	Kurtosis
Vibration, frequency range	2...3200 Hz
Vibration, measuring principle	MEMS
Vibration, measuring range	-16...16 g
Vibration, number of measuring axes	3

Remarks

For additional information, refer to user's guide.

Order accessories separately.

For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

IO-Link

IO-Link Profil IDs	N/A
--------------------	-----

Interface

Baud rate	COM3 (230,4 kBaud)
Interface	IO-Link 1.1
Interface setting option	Flexible process data configuration Vibration measurement based on ISO 10816-3 Data preprocessing (statistics) Events (pre-alarms and main alarms) Delay times for alarms Search function with LED display (ping)
Process data IN	20 bytes
Process data OUT	0 bytes
Process data cycle min.	10 ms

Material

Housing material	1.4404 stainless steel, Membrane: ePTFE with nylon fleece
------------------	---

Mechanical data

Dimension	20 x 10 x 32 mm
Mounting part	Screw M3 (2x)
Mounting surface	≥ 32 x 20 mm
Weight	30 g

Connector Drawings



Wiring Diagrams

Pin	Color	Signal
1	BN	+24V
3	BU	GND
4	BK	C/Q