


8	7	6	5	4	3	2	1
MODEL NO.	"L"	"BL"	"D"	P/N			
BT250S	600	7.5 ±.5	.125	17398			
BT.752S	24	7.5 ±.5	.046	17862			
BT.753S	36	7.5 ±.5	.046	17381			
BT11S	12	7.5 ±.5	.062	20487			
BT12S	24	7.5 ±.5	.062	20216			
BT13S	36	7.5 ±.5	.062	17264			
BT14S	48	7.5 ±.5	.062	20105			
BT15S	60	7.5 ±.5	.062	20340			
BT16S	72	7.5 ±.5	.062	20068			
BT18.3S	99	7.5 ±.5	.062	20057			
BT18S	96	7.5 ±.5	.062	20353			
BT19.6S	115	7.5 ±.5	.062	20056			
BT21.2S	14	7.5 ±.5	.125	17969			
BT21.5S	18	7.5 ±.5	.125	17266			
BT21.7S	20	7.5 ±.5	.125	20759			
BT210.5S	126	7.5 ±.5	.125	20055			
BT210S	120	7.5 ±.5	.125	17267			
BT211S	132	7.5 ±.5	.125	17383			
BT23S	36	7.5 ±.5	.125	17276			

NOTES:

1. 'M600' SUFFIX INDICATES FIBER POTTED ON ANGLED END WITH EPOXY OPERATES IN MAX. TEMPERATURE OF 600°F.
2. TABLE IS INCHES ONLY.

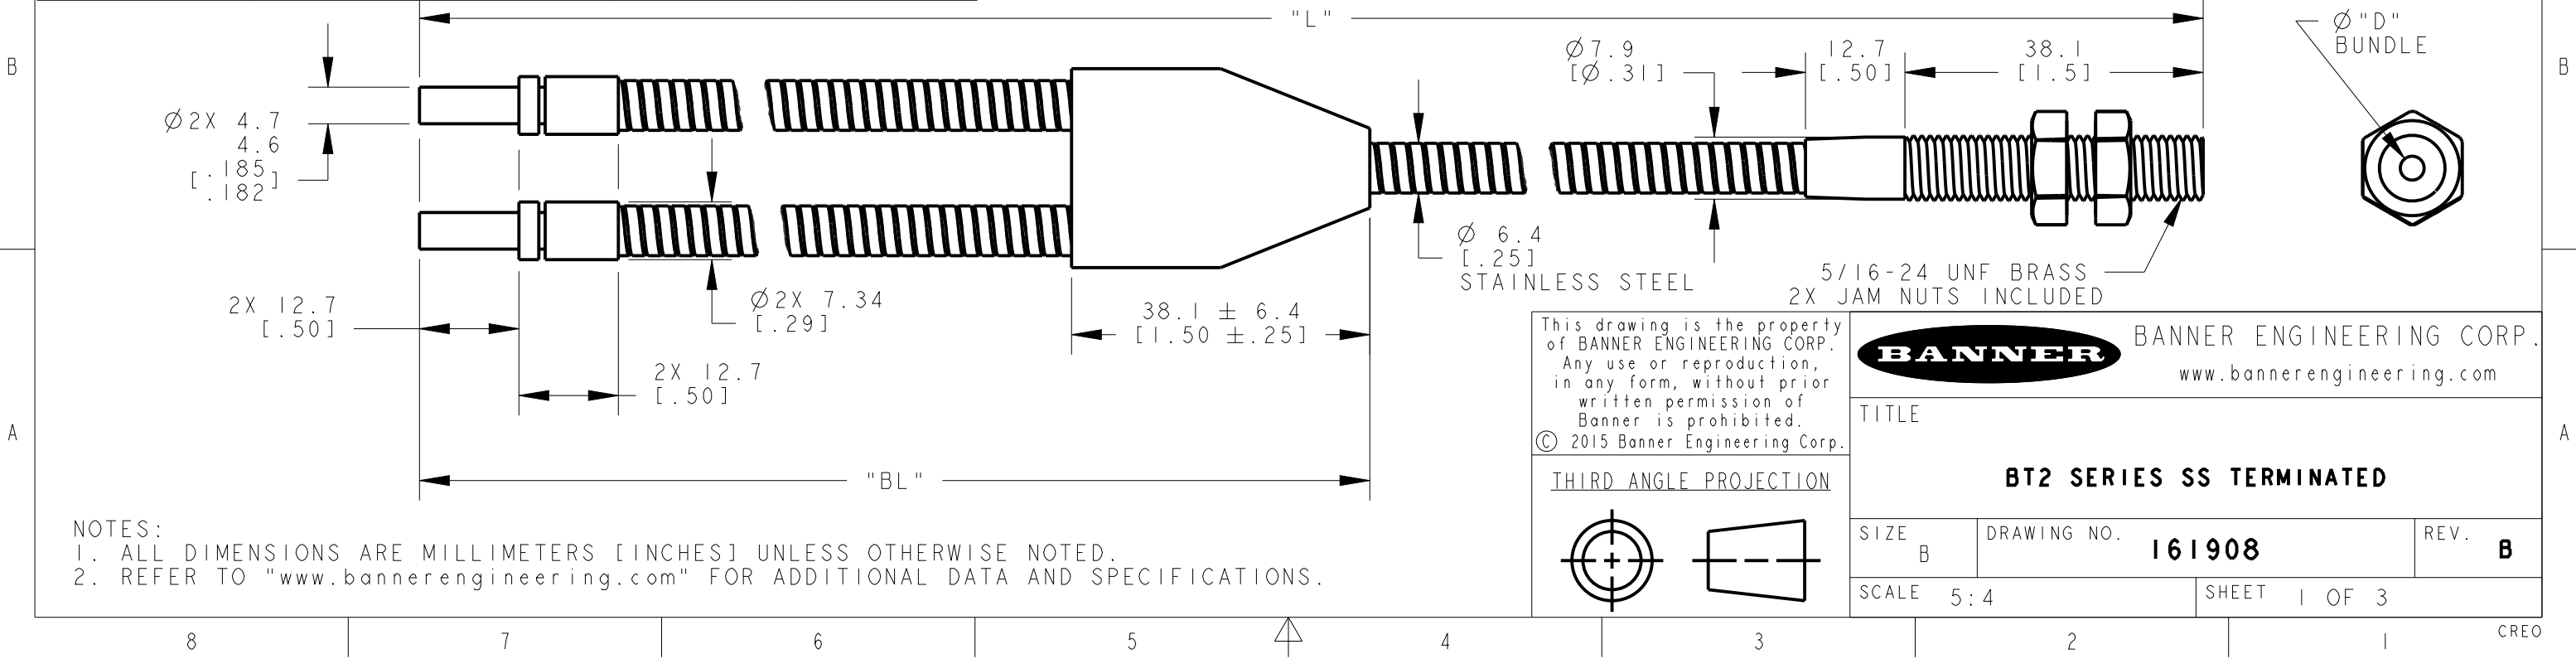

[illegible]