

daA1280-54lc - Basler dart

The Basler daA1280-54lc BCON camera with the ON Semiconductor AR0134 CMOS sensor delivers 54 frames per second at 1.2 MP resolution.



Number

1

+

-

Buy now or add to request cart

Request test camera



Add to watch list ☆

Specifications

General Information

Order Number	No-Mount: 107142, CS-Mount: 107143, S-Mount: 107144
--------------	---

Sensor

Sensor Vendor	ON Semiconductor
Sensor	AR0134
Shutter	Global Shutter
Max. Image Circle	1/3"
Sensor Type	CMOS
Sensor Size	4.8 mm x 3.6 mm
Resolution (HxV)	1280 px x 960 px
Resolution	1.2 MP
Pixel Size (H x V)	3.75 µm x 3.75 µm
Frame Rate	54 fps
Mono/Color	Color

Camera Data

Interface	BCON for LVDS
Pixel Bit Depth	8, 12 bits
Synchronization	<div><div>■</div> hardware trigger</div> <div><div>■</div> free-run</div> <div><div>■</div> software trigger</div>
Exposure Control	<div><div>■</div> programmable via the camera API</div>
Digital Input	1

Camera Data

Digital Output	2
Power Requirements	<ul style="list-style-type: none">5V DC (via BCON for LVDS interface)
Power Consumption (typical)	1.3 W

Housing

Housing Type	Board Level
Housing Size (L x W x H)	4.9 mm x 27 mm x 27 mm
Lens Mount	<ul style="list-style-type: none">CS-mountS-mountnone
Housing Temperature	0 - 50°C
Weight (typical)	15g

Conformity

Conformity	<ul style="list-style-type: none">CERoHSFCCULGenICam
------------	--

Features

Features

Click on a feature to open the corresponding topic in the **Basler Product Documentation**.

Color Creation and Enhancement	<ul style="list-style-type: none">Auto Function Profile: Anti-FlickerBacklight CompensationBalance White (Manual White Balance)Balance White Auto (Automatic White Balance)Contrast EnhancementHue/SaturationLight Source PresetsS-Curve Contrast ModesRGB Gamma Correction
I/O Control and Line Source Signals	<ul style="list-style-type: none">Acquisition Trigger Wait / Frame Burst Trigger WaitDebouncerExposure ActiveFlash WindowFrame Trigger WaitMinimum Output Pulse WidthTimer ActiveUser Output
Image Acquisition Control	<ul style="list-style-type: none">Acquisition StatusFrame Start TriggerTriggered by HardwareTriggered by Software
Miscellaneous	<ul style="list-style-type: none">Device Information ParametersUser Defined ValuesUser Sets (Configuration Sets)
PGI	<ul style="list-style-type: none">5x5 DebayeringColor-Anti-Aliasing

Features

Click on a feature to open the corresponding topic in the Basler Product Documentation.


	<ul style="list-style-type: none">■ Denoising
Pixel Formats	<ul style="list-style-type: none">■ Bayer 12■ Bayer 8■ RGB 8■ YCbCr422_8 (YUV422_8)
Standard Features	<ul style="list-style-type: none">■ Auto Function Profile■ Binning Horizontal■ Binning Vertical■ Black Level■ Exposure Auto■ Exposure Mode: Timed (Control via API)■ Gain■ Gain Auto■ Gamma Correction■ Region of Interest (ROI)■ Reverse X (Horizontal Mirroring)■ Reverse Y (Vertical Mirroring)■ Test Images

Dimensions

Mechanical drawing for daA1280-54lc

Mechanical drawings provide the detailed measurements of a camera product. Click on the link below to download the mechanical drawing for daA1280-54lc.

[Download now](#)

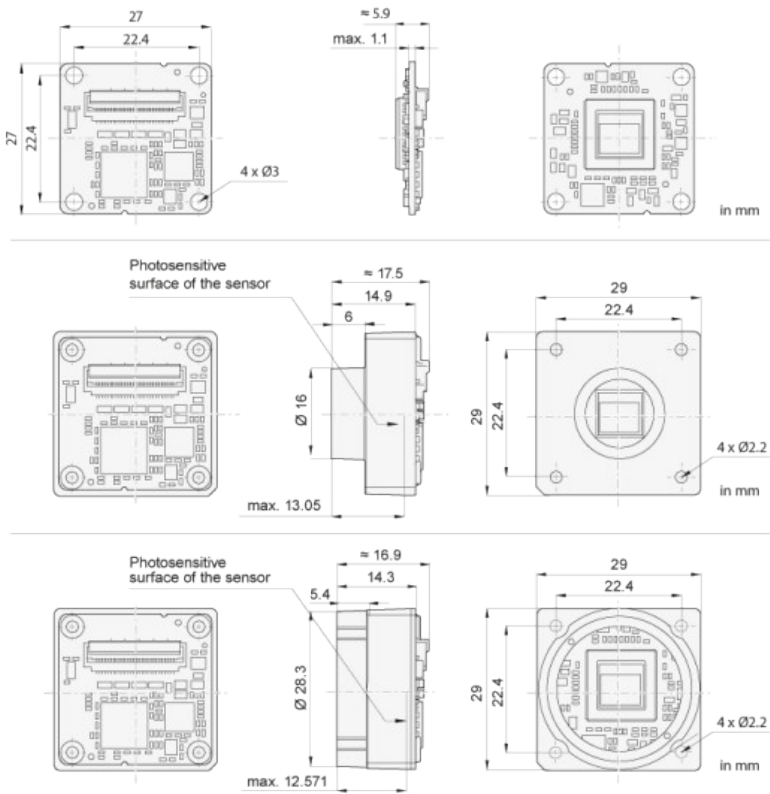

[share](#)[tweet](#)[share](#)[share](#)[mail](#)

eNewsletter

Regular updates on events and product innovations:

[Subscribe](#)

Basler on the social networks

Keep in touch with us via the social networks:



© 2019 **Basler AG** [Glossary](#) [Sitemap](#) [Legal Info](#) [Privacy Statement](#) [Legal Notice](#) [Terms and Conditions](#) [Contact](#) [Driving Directions](#)

沪ICP备17041046号-1