



Features

- Wide 4 : 1 Input Voltage Range(9~36V,18~75V)
- Remote On/Off
- High Efficiency up to 87%
- Input / Output Isolation Voltage: 1.5K Vdc
- Extended Operating Temperature Range: -40°C to +85°C
- Output Short Circuit Protection:
Hiccup, continuous & Auto Recovery
- Over Voltage Protection: Clamp Mode
- Shielded Metal Case with Insulated Baseplate
- Lead Free Design, RoHS Compliant
- 24pin DIP Package with Industry-Standard Footprint
- Customer Design Available



Description

The BOB12W Series are isolated 12W DC/DC converters. Designed with highly efficiency, allow the operating temperature range of these units to be -40°C to +85°C in a 24 pin DIP package with industry-standard footprint. Further features include wide 4 : 1 input voltage range, remote on/off control, short-circuit protection and over voltage protection.

Applications

These converters are well suitable for battery operated equipment, measurement equipment, telecom, wireless network, Industry control system, everywhere where isolated, tightly regulated voltages and compact size are required.

Technical Specification

All specifications are typical at nominal input, full load and 25°C unless otherwise stated.

Model Number	Input Voltage Range	Output Voltage (Vdc)	Output Current (mA)		Input Current (mA)		Eff. ⁽²⁾ (%)	Capacitive Load, max. ⁽³⁾ (uF)
			Min. Load ⁽¹⁾	Full. Load	No Load	Full Load		
BOB12-24S0W	9~36V Nominal:24Vdc	3.3	0	3500	49	609	83	35700
BOB12-24S1W		5.1	0	2400	58	638	84	9400
BOB12-24S2W		12	0	1000	14	617	85	3530
BOB12-24S3W		15	0	800	17	617	85	2200
BOB12-24D1W		±5	0	±1200	18	642	82	6900
BOB12-24D2W		±12	5	±500	17	617	85	1760
BOB12-24D3W		±15	0	±400	17	617	85	1100
BOB12-48S0W	18~75V Nominal:48Vdc	3.3	0	3500	19	300	84	21000
BOB12-48S1W		5.1	0	2400	24	315	85	12860
BOB12-48S2W		12	80	1000	6	302	87	2300
BOB12-48S3W		15	30	800	6	302	87	1660
BOB12-48D1W		±5	80	±1200	6	317	83	6030
BOB12-48D2W		±12	0	±500	13	309	85	1100
BOB12-48D3W		±15	0	±400	9	304	86	760



Input Specifications

Input Voltage	24V nominal input	9-36Vdc
	48V nominal input	18-75Vdc
Input filter		Pi Type
Input surge voltage (100ms max.)	24V input	50Vdc
	48V input	100Vdc
Input reflected ripple current	Nominal Vin and full load	100mA _{p-p} typ.
Start up time	Nominal Vin and constant resistive load	75ms typ.
Remote ON/OFF	Converter: ON	Open or $3.5V < V_r < 12V$
	Converter: OFF	Short ⁽⁴⁾ or $0V < V_r < 0.5V$
Sourcing current of remote control pin	Nominal Vin	< 0.2 mA
Idle input current (at Remote OFF state)	Nominal Vin	< 7.5 mA

Environmental Specifications

Operating ambient temperature	-40°C to +85°C (with derating)
Maximum case temperature	+100°C
Storage temperature range	-55°C to +105°C
Relative humidity	5% to 95% RH
Temperature coefficient	±0.02% / °C max.

Output Specifications

Output power		12 Watts max.
Voltage accuracy	Full load and nominal Vin	±1.2%
Minimum load		See table
Line regulation	LL to HL at full load	±0.5%
Load Regulation	25% load to full load	Single ±1%
	Balanced load	Dual ±1%
	Unbalanced load 25% to 100% full load	±5%
Ripple and Noise	20MHz bandwidth	85mV _{p-p} max.
Over voltage protection (Zener Diode Clamp)	3.3V _{out} models	3.9V
	5V _{out} models	6.2V
	12V _{out} models	15V
	15V _{out} models	18V
Capacitive load		See table
Over load protection	% of full load at nominal input	150% typ.
Short circuit protection		Hiccup, continuous (Auto Recovery)
Transient response settling time	50% load step change	350μs typ.
Transient response over shoot	di/dt=0.8A/μs	≤ ±5% of V _o


General Specifications




Isolated DC-DC Converters BOB12W Series -- 12 Watt

Efficiency	Nominal input	See table
Isolation voltage	Input to output	1500Vdc
Isolation resistance	500Vdc	10^9 Ohms min.
Isolation capacitance		260pF typ.
Switching frequency		400kHz typ.
Reliability, calculated MTBF		2.11×10^6 Hrs
Physical Specifications		
Case material		Nickel-coated copper
Base material		Non-conductive black plastic
Potting material		Silicon rubber (UL94V-0)
Dimensions		$1.25 \times 0.80 \times 0.40$ Inch ($31.75 \times 20.32 \times 10.16$ mm)
Weight		18g (0.62oz) typ.


BOB12W Series
Power Derating Curve⁽⁵⁾


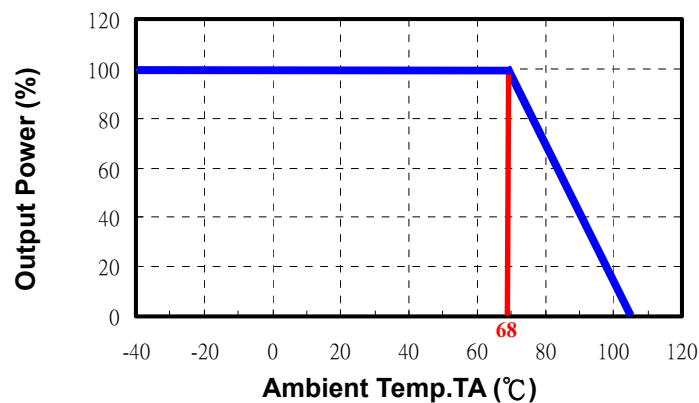


BOB12-48S1W
Input voltage vs. Efficiency

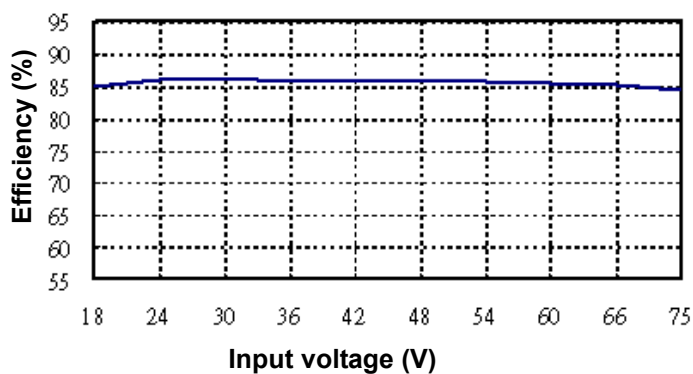


BOB12-48S1W
Output Current vs. Efficiency

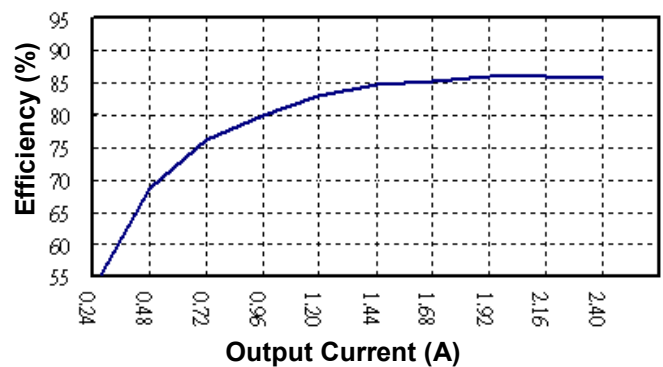

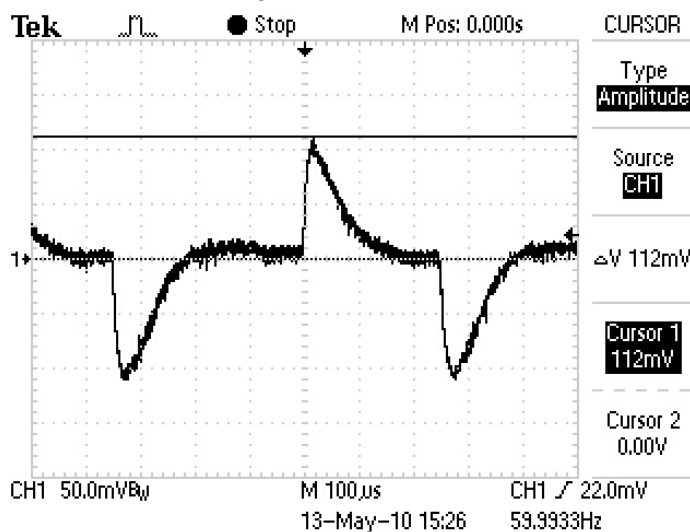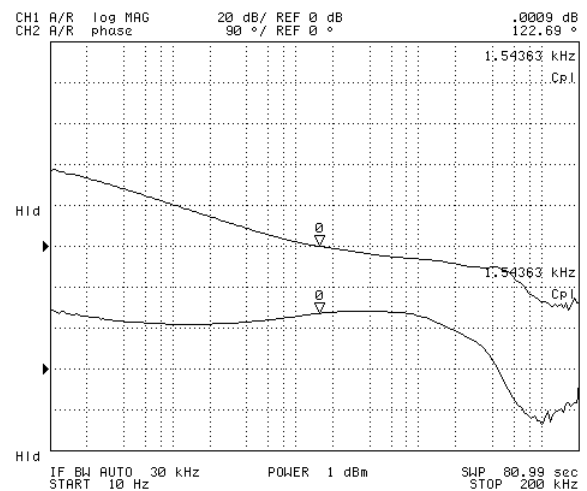
BOB12-48S1W
BOB12-48S1W
Transient Response at 50%~100% Max Load

Loop Gain & Phase at Vi=48V, Full Load

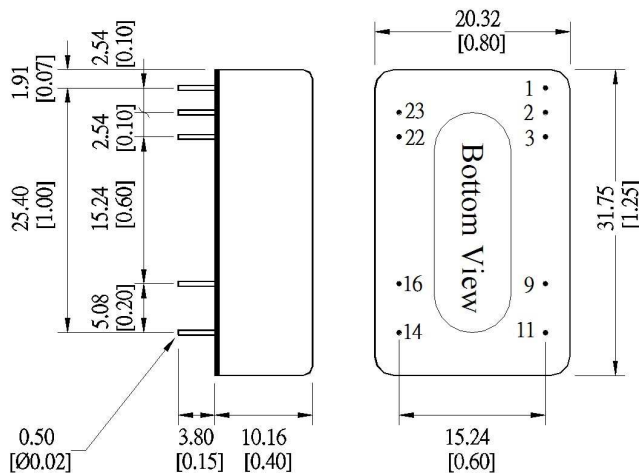Note

1. Io below this value will not damage these converters, however, they may not meet all listed specifications.
2. Typical value, tested at nominal input and full load.
3. For each output.
4. Short to -Vin (Pin 2,3).
5. Based on BOB12-48S1W.

Mechanical Dimensions

Pin Assignment

Pin	Single	Dual
1	Remote On/Off	
2	-Vin	-Vin
3	-Vin	-Vin
9	No function	Common
11	No function	-Vout
14	+Vout	+Vout
16	-Vout	Common
22	+Vin	+Vin
23	+Vin	+Vin

Specifications subject to change without notice.