



Features

- Wide 2 : 1 Input Voltage Range(4.5~9V,9~18V,18~36V,36~75V)
- Input / Output Isolation Voltage: 1.5K Vdc
- Extended Operating Temperature Range: -40°C to +85°C
- Output Short Circuit Protection:
Continuous & Auto Recovery
- Over Voltage Protection: Clamp Mode
- UL94V-0 Package Material
- Lead Free Design, RoHS Compliant
- 24pin DIP Package with Industry-Standard Footprint
- Customer Design Available



Description

The BQA3R Series are isolated 3W DC/DC converters. Designed with highly efficiency, allow the operating temperature range of these units to be -40°C to +85°C in a 24 pin DIP package with industry-standard footprint. Further features include wide 2 : 1 input voltage range, short-circuit protection and over voltage protection.

Applications

These converters are well suitable for battery operated equipment, measurement equipment, telecom, wireless network, Industry control system, everywhere where isolated, tightly regulated voltages and compact size are required.

Technical Specification

All specifications are typical at nominal input, full load and 25°C unless otherwise stated.

Model Number	Input Voltage Range	Output Voltage (Vdc)	Output Current (mA)		Input Current (mA)		Eff. ⁽²⁾ (%)	Capacitive Load, max. ⁽³⁾ (uF)
			Min. Load ⁽¹⁾	Full. Load	No Load	Full Load		
BQA3-05S0R	4.5~9V Nominal:5Vdc	3.3	0	600	46	552	76	4000
BQA3-05S1R		5	0	500	44	646	81	4000
BQA3-05S2R		12	0	250	62	769	82	4000
BQA3-05S3R		15	0	200	67	760	83	4000
BQA3-05D1R		±5	0	±250	55	638	82	1000
BQA3-05D2R		±12	0	±125	83	766	82	1000
BQA3-05D3R		±15	0	±100	89	765	82	1000
BQA3-12S0R	9~18V Nominal:12Vdc	3.3	0	600	26	223	78	4000
BQA3-12S1R		5	0	500	24	263	83	4000
BQA3-12S2R		12	0	250	35	314	84	4000
BQA3-12S3R		15	0	200	36	311	84	4000
BQA3-12D1R		±5	0	±250	29	262	83	1000
BQA3-12D2R		±12	0	±125	44	313	84	1000
BQA3-12D3R		±15	0	±100	59	317	83	1000
BQA3-24S0R	18~36V Nominal:24Vdc	3.3	0	600	20	112	78	4000
BQA3-24S1R		5	0	500	23	133	82	4000
BQA3-24S2R		12	0	250	26	157	84	4000
BQA3-24S3R		15	0	200	26	156	84	4000
BQA3-24D1R		±5	0	±250	22	133	83	1000
BQA3-24D2R		±12	0	±125	30	159	83	1000
BQA3-24D3R		±15	0	±100	40	160	82	1000
BQA3-48S0R	36~75V Nominal:48Vdc	3.3	30	600	10	57	76	4000
BQA3-48S1R		5	0	500	9	67	81	4000
BQA3-48S2R		12	0	250	11	79	83	4000
BQA3-48S3R		15	0	200	12	79	83	4000
BQA3-48D1R		±5	0	±250	10	67	82	1000
BQA3-48D2R		±12	0	±125	14	79	82	1000
BQA3-48D3R		±15	0	±100	18	80	82	1000


Input Specifications

Input Voltage	5V nominal input	4.5-9Vdc
	12V nominal input	9-18Vdc
	24V nominal input	18-36Vdc
	48V nominal input	36-75Vdc
Input filter		Pi Type
	5V input	10Vdc
	12V input	25Vdc
Input surge voltage (100ms max.)	24V input	50Vdc
	48V input	100Vdc
Input reflected ripple current	Nominal Vin and full load	100mA _{p-p} max.
Start up time	Nominal Vin and constant resistive load	100ms max.

Environmental Specifications

Operating ambient temperature	-40°C to +85°C (with derating)	
Maximum case temperature	+90°C	
Storage temperature range	-40°C to +125°C	
Relative humidity	5% to 95% RH	
Temperature coefficient	±0.02% / °C max.	

Output Specifications

Output power	3 Watts max.	
Voltage accuracy	Full load and nominal Vin	±1%
Minimum load	See table	
Line Regulation	LL to HL at full load	±0.5%
Load Regulation	25% load to full load	Single ±0.5%
	Balanced load	Dual ±0.5%
	Unbalanced load 25% to 100% full load	±3%
Ripple and Noise	20MHz bandwidth	60mV _{p-p} max.
Over voltage protection (Zener Diode Clamp)	3.3V _{out} models	3.9V
	5V _{out} models	6.2V
	12V _{out} models	15V
	15V _{out} models	18V
Capacitive load	See table	
Over load protection	% of full load at nominal input	110% typ.
Short circuit protection	Continuous, automatic recovery	
Transient response settling time	50% load step change	46ms max.
Transient response over shoot	di/dt=0.8A/μs	≤ ±5% of Vo



General Specifications

Efficiency	Nominal input	See table
Isolation voltage	Input to output	1500Vdc
Isolation resistance	500Vdc	10^9 Ohms min.
Isolation capacitance		280pF typ.
Switching frequency		150kHz typ.
Reliability, calculated MTBF		1.1×10^6 Hrs


Physical Specifications

Case material	Non-conductive black plastic
Base material	Non-conductive black plastic
Potting material	Silicon rubber (UL94V-0)
Dimensions	1.25 × 0.80 × 0.40 Inches (31.8 × 20.3 × 10.2 mm)
Weight	12.8g (0.45oz) (typical)


BQA3R Series
Power Derating Curve⁽⁴⁾


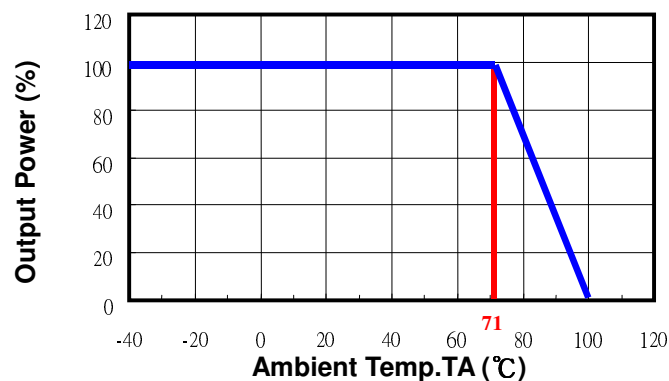


BQA3-48S1R
Input voltage vs. Efficiency

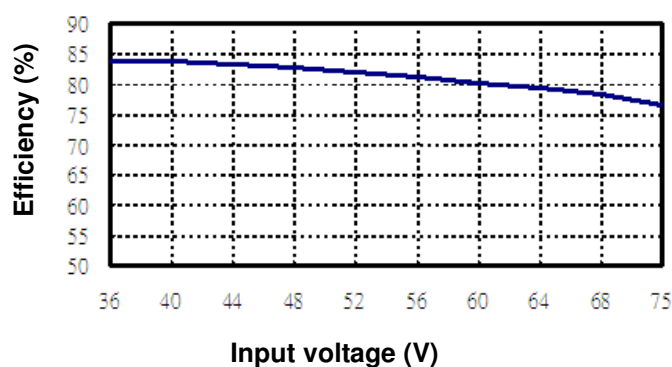


BQA3-48S1R
Output Current vs. Efficiency

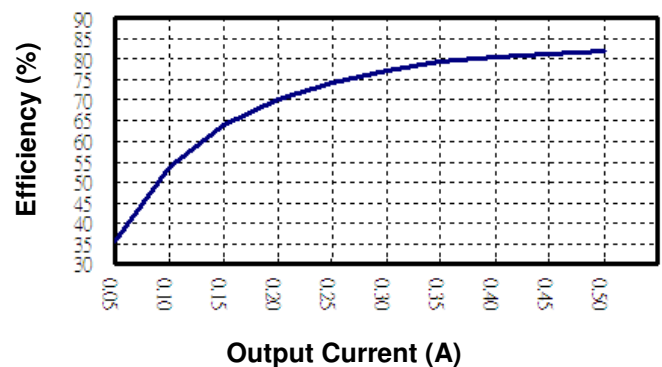

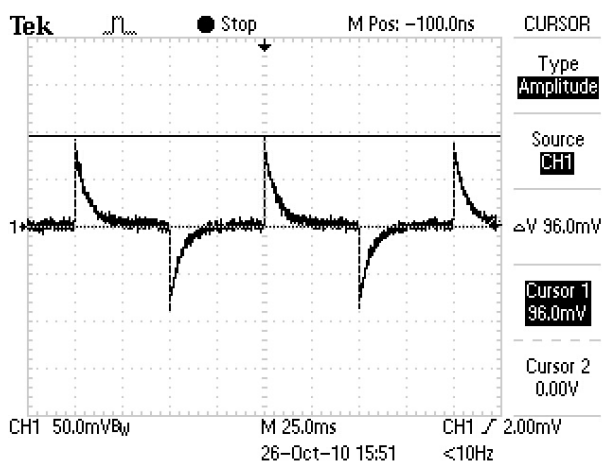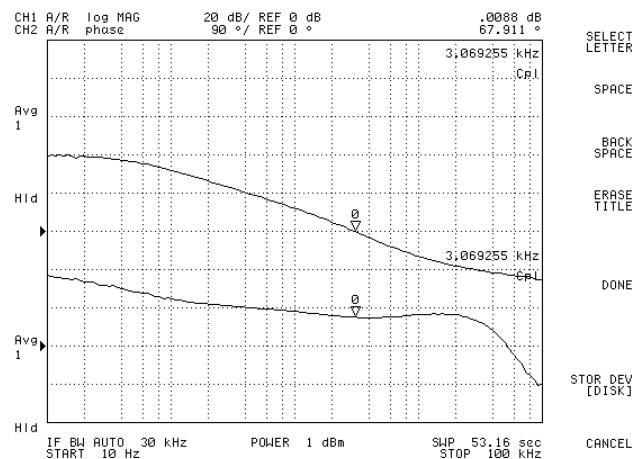
BQA3-48S1R
Transient Response at 50%~100% Max Load

BQA3-48S1R
Loop Gain & Phase at $V_i=48V$, Full Load

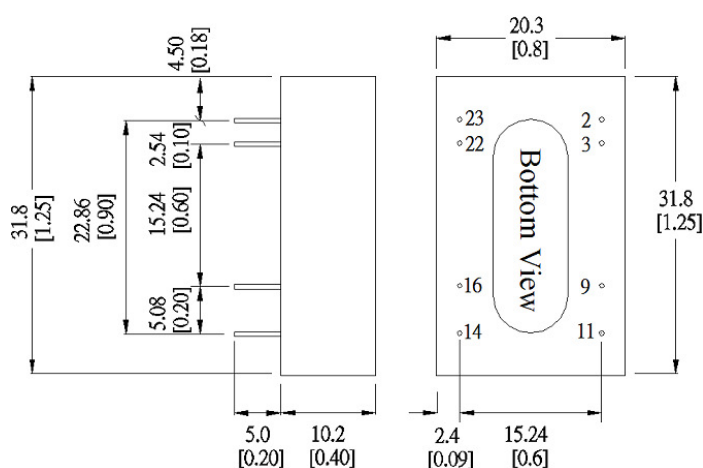Note

1. Io below this value will not damage these converters, however, they may not meet all listed specifications.
2. Typical value, tested at nominal input and full load.
3. For each output.
4. Based on BQA3-48S1R.

Mechanical Dimensions


Pin Assignment		
Pin	Single	Dual
2	-Vin	-Vin
3	-Vin	-Vin
9	No pin	Common
11	No con.	-Vout
14	+Vout	+Vout
16	-Vout	Common
22	+Vin	+Vin
23	+Vin	+Vin

Specifications subject to change without notice.