

Wind Vane

PVC Housing, Rotor in black painted Stainless Steel

Type DWS-D-DAC13



- Wind vane for relative wind direction
- Opto-electronic detection
- PNP- & NPN-open collector outputs in the same unit
- Indication of 0° and 90° intervals
- 10 to 28 VDC supply voltage
- All inputs and outputs are protected against reverse polarity and transients
- Built-in heater
- Dust sealing

Product Description

DWS-D-DAC13 is a relative wind vane designed mainly for the windmill industry for measurement of the relative wind direction. The product contains both PNP- and NPN open collector outputs, in which a fixed current is switched according to the selected direction. A built-in self-regulated heater reduces the risk of glazing. The heater is supplied separately, which

makes it possible to control the heating. The DWS-D-DAC13 is equipped with a specially designed protection mechanism, which protects the bearings and the electronic parts against dirt and humidity. The body of the sensor is made of black PVC, and the rotor is produced in stainless steel.

Ordering Key

DWS-D-DAC13

Dynamic wind sensor _____
 Wind direction _____
 Digital output _____
 (Future subtypes) _____
 Cable version _____
 Standard cable length in full metres^{*)} _____

^{*)} can be specified by customer

Specifications

Rated operational voltage	U _B	12 to 24 VDC
	U _C	10 to 28 VDC
Supply current (without heater)		Approx. 20 mA (all outputs off)

Output Specifications

Signal	NPN Open Collector constant current sink	Square wave 12.5 mA ± 2mA
	PNP Open Collector constant current source	Square wave 12.5 mA ± 2mA
Output power		≤ 250 mW
Load supply voltage		Min. 10 VDC Max. 28 VDC
Voltage drop		Typ. 4.9 VDC

General Specifications


Dimensions		
Wind vane length		145 mm
Thread		External thread: M28 x 2 with one nut
Materials		
Body		Black PVC
Rotor		Stainless steel (AISI 303), black painted
Bearings		Instrument ball bearings, stainless steel
Cable		Shielded grey PVC, 8 x 0.25 mm ²
Rotor/housing tightening		Dust labyrinth
Environment		
Degree of protection		IP54
Ambient humidity		0 to 100% RH
Climatic protection		Against high humidity, salt and dust
Ambient temperature		
Operating temperature		-20 to 60°C (-4 to +140°F)
Storage temperature		-20 to 60°C (-4 to +140°F)
Heating system		
Heater		> -20°C (> -4°F)
Supply voltage		PTC-element 12 to 24 VAC/DC on separate wires




General Specifications (cont.)

Inrush current	1.5 A
Power consumption	@ -20°C (-4°F): app. 10 W @ +20°C (+68°F): app. 5 W @ +60°C (+140°F): app. 1.5 W
EMC	
IEC 61000-4-2	
Contact discharge	± 4 kV
Air discharge	± 8 kV
IEC 61000-4-3	
Radiated radio-frequency	15 V/m
Electromagnetic fields	
IEC 61000-4-4	
Fast transients/burst	
Power port, performance B	± 2 kV
Signal port, performance B	± 1 kV
IEC 61000-4-5	
Surge 1.2/50 µs	
Power port, Ri = 2 Ω	500 V
Signal port, Ri = 47 Ω	2000 V
IEC 61000-4-6	
Conducted disturbances induced by radio-frequency fields	12 V _{rms}
Mounting instruction	Mounted vertical with M28 thread. Marking (dot) on the housing indicates 0° position.
Weight	1.1 kg incl. 13 m cable and packaging

Dimensions

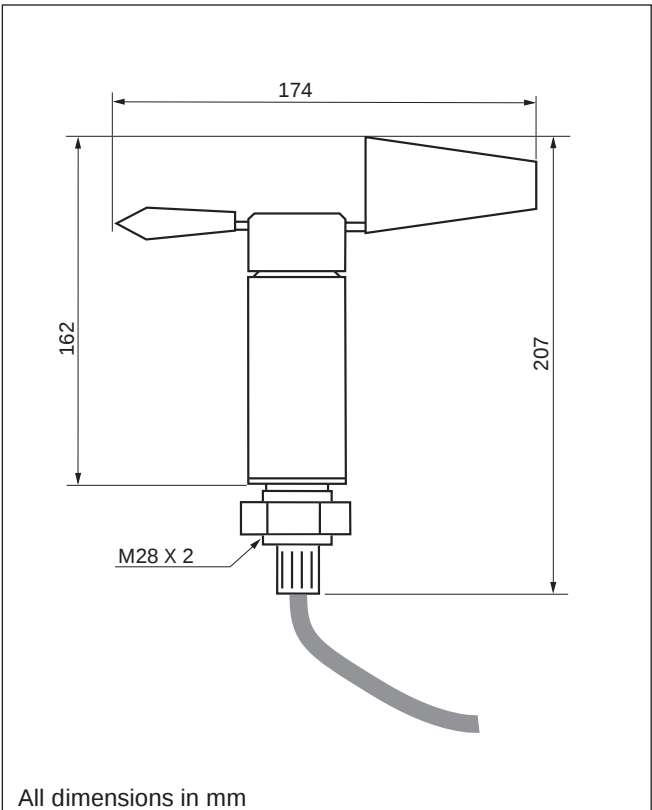

Wiring Diagram

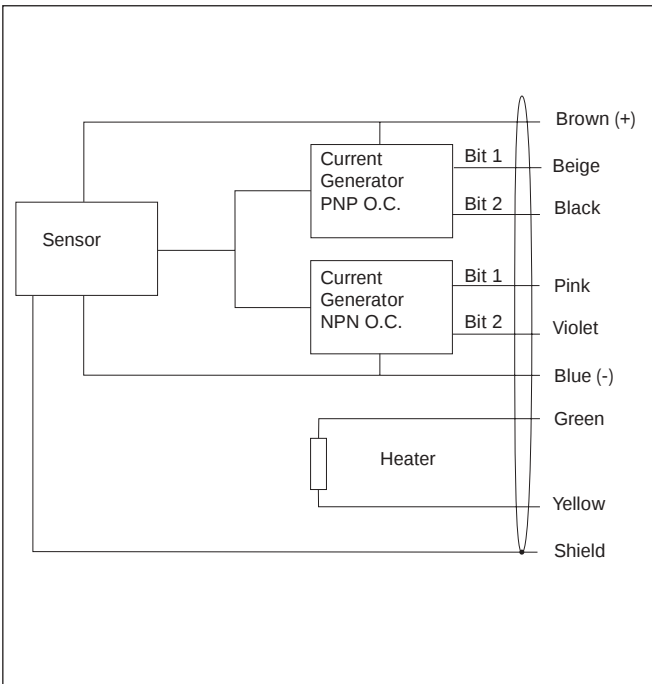

Signal

