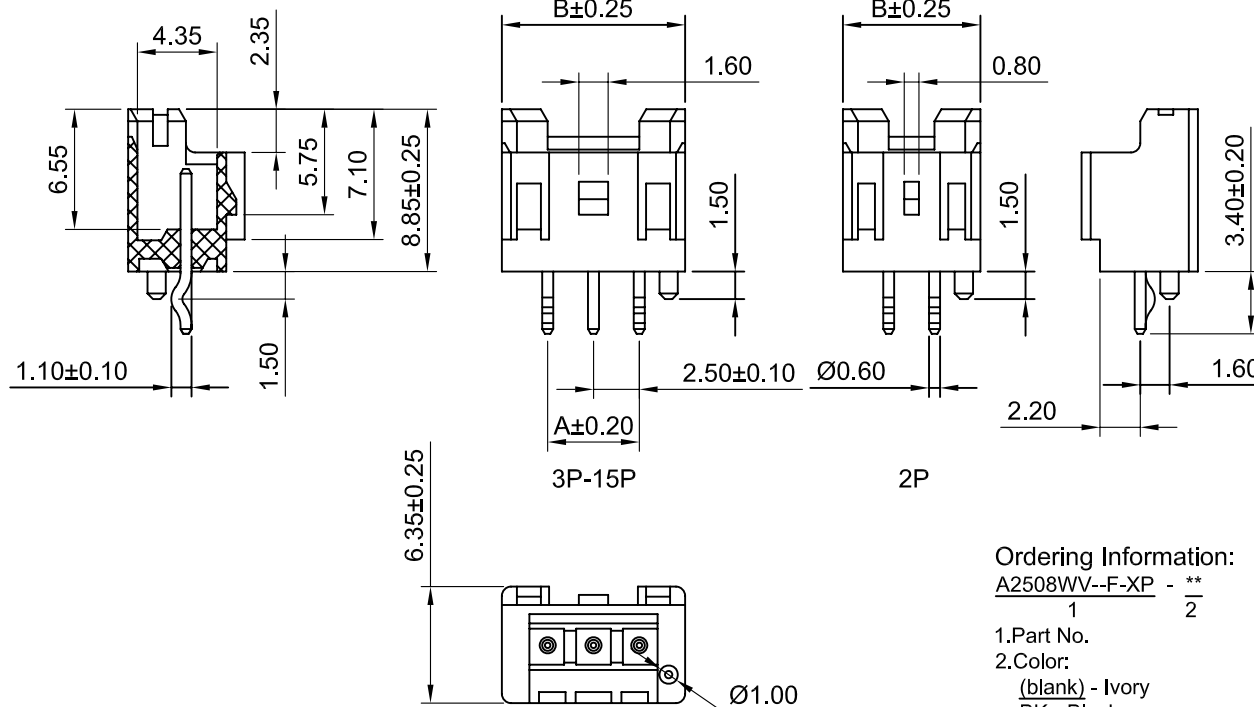


P.C.B LAYOUT

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1000V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 66, UL94V-0(White)

Ordering Information & Dimensions

Ordering Information:

A2508WV--F-XP - **
1
2

1.Part No.
2.Color:
(blank) - Ivory
BK - Black
RD - Red
BL - Blue
YL - Yellow
GN - Green
OR - Orange
BR - Brown
GY - Gray
PK - Pink
WH - White
LY - Lemon yellow
P - Purple
LE - Light blue
FY - Vivid yellow

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.50	7.50	9P	20.00	25.00
3P	5.00	10.00	10P	22.50	27.50
4P	7.50	12.50	11P	25.00	30.00
5P	10.00	15.00	12P	27.50	32.50
6P	12.50	17.50	13P	30.00	35.00
7P	15.00	20.00	14P	32.50	37.50
8P	17.50	22.50	15P	35.00	40.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		Title : 2.50mm PITCH	
mm		2.5:1		1 of 1			
Draw BY:			Approved :			180° Wafer	
Jack Yin			GONGYB				
General Tolerance							
x.x±0.25		ANGLE± 					
x.xx±0.20							
x.xxx±0.15		DRAW NO : A2508WV-F-XP				REV A1	