



カスタム検索

Japanese

Sales Subs. | Lang.

[home](#)[Product information](#)[Technical information](#)[Support · Inquiries](#)[Sales agent dealer](#)[company information site](#)[Home](#) > [Product Information](#) > [G Series](#) > [G2W](#) > [G2W-15](#)

G2W-15

Released in 1975

RoHS

Free compensation period 2 years

Terminal block cover is not standard equipment of this product.

If you need a terminal block cover, please order T specification.

[Catalog \(including outline drawing\)](#)[Instructions](#)[Optional parts sold separately](#)

Features

[Nomenclature method and option](#)[Specification \(Overview\)](#)[Block Diagram](#)[Download various documents](#)

Features of G2W-15

High quality, high reliability No
switching noise
Low ripple
Overcurrent protection circuit with
overvoltage protection (option)

Naming method and product option

G (1) 2 (2) □ (3) - 5 (4) - □ (5)

(1) Series name

(2) Shape

(3) 2 Output: W

(4) Rated output voltage

(5) Option

T: With terminal block cover

Product information

Product Search

入力例 : PBA



Easy search
including discontinued
products

is here

Search from power
supply classification

Search by shape

Search by industry /
application

Application Guide

Q & A (Frequently Asked
Questions)

if you thought it was a
malfunction

Notes

About power supply

[Request Catalog](#)

The non-judgment
request form

Environmental
chemical substance

Specification (Overview)

item		specification
Input voltage		AC 90 ~ 110V 1Φ
output	Power	15 W
	Voltage current	± 15 V 0.5 A
	Voltage variable range	± 1 V
Accessory function	Overcurrent protection	Operates at 110 to 140% of the rated current, automatic restoration
	Overvoltage protection	Please use an external overvoltage protection unit
	Remote control	-
	Remote sensing	-
	Other	-
Operating temperature · humidity		-10 to 65 ° C, 10 to 90% RH (no condensation) *
Adaptive standard	Safety standard	-
	Noise terminal voltage	-
	Harmonic current	-
Construction	Outer dimensions (W × H × D)	88 x 84 x 105 mm (excluding terminal block)
	mass	1.2 kg max
	Cooling method	Natural air cooling
Standard price (tax excluded)		23,160 yen (With external OV option: 33,960 yen ※ Two external OV options are used)
Free compensation period		2 years

※ For detailed specifications, how to use, please refer to catalog · instructions

[Catalog \(including outline drawing\)](#)

[Instructions](#)

Block Diagram

information download
(AIS / JGPSSI)

Discontinued item

About quotation and purchase


For quotation / purchase, please contact sales shop, or online shopping site

[Sales handling store / online mail order site](#)

 **ご使用上の注意事項**
製品、カタログ・取扱説明を
ご使用前に必ずご確認ください

模倣品・不正改造品に
対するご注意

IEC60601-1
EN60601-1
第3.1版 取得電源

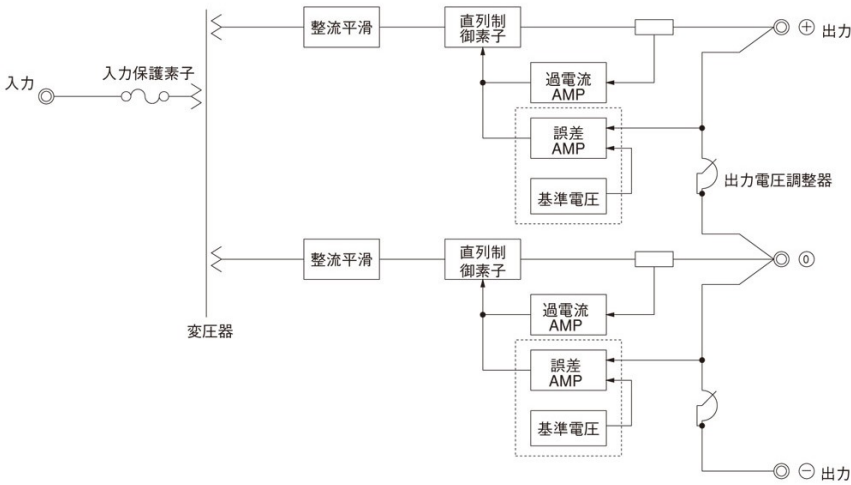

Download various documents

Technical data	Characteristics data Estimated lifetime data reliability MTBF
----------------	---

There are also materials that are not included. Please inquire in detail.

Cosel Network

Sales

Dealership

Cosel Network

Net Online

shopping site

Technical information to

purchase

inquiries



[home](#) | [Site Terms of Use](#) | [privacy policy](#) | [site map](#) |

COPYRIGHT © COSEL CO., LTD. ALL RIGHTS RESERVED.