


| REVISIONS | | | | | | | | | | | | | | | | | | | |
|---|---|--|--|-------------------------------------|--|------------------|---|---|---|---|--------------------|---|-------------------|---|-------------------|----|----|----|----|
| LTR | DESCRIPTION | | | | | | | | | | DATE (YR-MO-DA) | | | | APPROVED | | | | |
| A | Table I, Efficiency test, change minimum limit for subgroup 1 from 85% to 84% and subgroups 2, 3 from 84% to 83%. Update drawing boilerplate. | | | | | | | | | | 03-05-28 | | | | Raymond Monnin | | | | |
| B | Table I; Change the maximum limit for the load regulation test (VR _{LOAD}) from 20 mV to 30 mV for subgroup 1 and add 100 mV for the maximum limit for subgroups 2 and 3. Update drawing to the latest requirements. -sld | | | | | | | | | | 05-12-13 | | | | Raymond Monnin | | | | |
| C | Added footnote 1 to table II, under group C end-point electricals. Updated drawing paragraphs. -sld | | | | | | | | | | 11-04-13 | | | | Charles F. Saffle | | | | |
| | | | | | | | | | | | | | | | | | | | |
| REV | | | | | | | | | | | | | | | | | | | |
| SHEET | | | | | | | | | | | | | | | | | | | |
| REV | | | | | | | | | | | | | | | | | | | |
| SHEET | | | | | | | | | | | | | | | | | | | |
| REV STATUS | | | | REV | | C | C | C | C | C | C | C | C | C | C | C | C | C | C |
| OF SHEETS | | | | SHEET | | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 |
| PMIC N/A | | | | PREPARED BY Steve L. Duncan | | | | | | DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990 http://www.dscclia.mil | | | | | | | | | |
| STANDARD MICROCIRCUIT DRAWING THIS DRAWING IS AVAILABLE FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE AMSC N/A | | | | CHECKED BY Michael C. Jones | | | | | | | | | | | | | | | |
| | | | | APPROVED BY Kendall A. Cottongim | | | | | | MICROCIRCUIT, HYBRID, LINEAR, 12 VOLT, SINGLE CHANNEL, DC/DC CONVERTER | | | | | | | | | |
| | | | | DRAWING APPROVAL DATE 99-05-18 | | | | | | | | | | | | | | | |
| | | | | REVISION LEVEL C | | | | | | SIZE A | CAGE CODE 67268 | | 5962-99549 | | | | | | |
| | | | | | | SHEET 1 OF 14 | | | | | | | | | | | | | |

1. SCOPE

1.1 Scope. This drawing documents five product assurance classes as defined in paragraph 1.2.3 and MIL-PRF-38534. A choice of case outlines and lead finishes which are available and are reflected in the Part or Identifying Number (PIN). When available, a choice of radiation hardness assurance levels are reflected in the PIN.

1.2 PIN. The PIN shall be as shown in the following example:

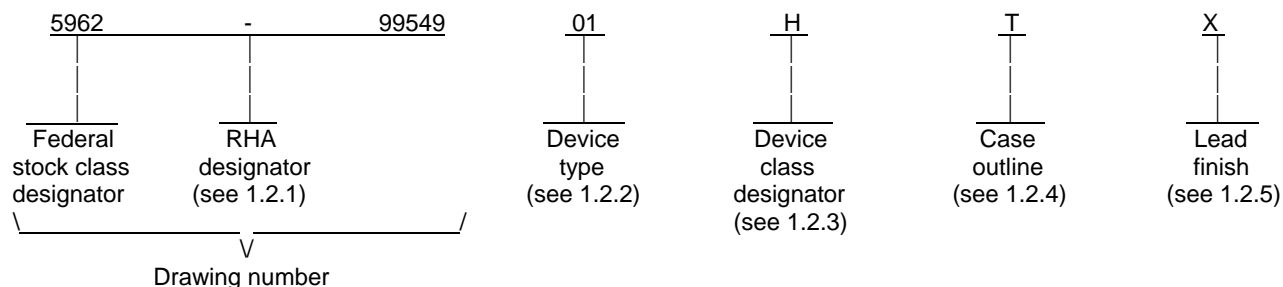

1.2.1 Radiation hardness assurance (RHA) designator. RHA marked devices shall meet the MIL-PRF-38534 specified RHA levels and shall be marked with the appropriate RHA designator. A dash (-) indicates a non-RHA device.

1.2.2 Device type(s). The device type(s) identify the circuit function as follows:

| <u>Device type</u> | <u>Generic number</u> | <u>Circuit function</u> |
|--------------------|-----------------------|-------------------------------------|
| 01 | MOR2812S/883 | DC/DC converter, 110 W, 12 V output |

1.2.3 Device class designator. This device class designator shall be a single letter identifying the product assurance level. All levels are defined by the requirements of MIL-PRF-38534 and require QML Certification as well as qualification (Class H, K, and E) or QML Listing (Class G and D). The product assurance levels are as follows:

| <u>Device class</u> | <u>Device performance documentation</u> |
|---------------------|---|
| K | Highest reliability class available. This level is intended for use in space applications. |
| H | Standard military quality class level. This level is intended for use in applications where non-space high reliability devices are required. |
| G | Reduced testing version of the standard military quality class. This level uses the Class H screening and In-Process Inspections with a possible limited temperature range, manufacturer specified incoming flow, and the manufacturer guarantees (but may not test) periodic and conformance inspections (Group A, B, C, and D). |
| E | Designates devices which are based upon one of the other classes (K, H, or G) with exception(s) taken to the requirements of that class. These exception(s) must be specified in the device acquisition document; therefore the acquisition document should be reviewed to ensure that the exception(s) taken will not adversely affect system performance. |
| D | Manufacturer specified quality class. Quality level is defined by the manufacturers internal, QML certified flow. This product may have a limited temperature range. |

**STANDARD
MICROCIRCUIT DRAWING**
DLA LAND AND MARITIME
COLUMBUS, OHIO 43218-3990

SIZE
A

REVISION LEVEL
C

5962-99549
SHEET
2

1.2.4 Case outline(s). The case outline(s) are as designated in MIL-STD-1835 and as follows:

| <u>Outline letter</u> | <u>Descriptive designator</u> | <u>Terminals</u> | <u>Package style</u> |
|-----------------------|-------------------------------|------------------|---------------------------------------|
| T | See figure 1 | 12 | Tabbed flange mount, lead formed up |
| U | See figure 1 | 12 | Flange mount, lead formed down |
| X | See figure 1 | 12 | Flange mount, short lead |
| Y | See figure 1 | 12 | Tabbed flange mount, short lead |
| Z | See figure 1 | 12 | Tabbed flange mount, lead formed down |

1.2.5 Lead finish. The lead finish shall be as specified in MIL-PRF-38534.

1.3 Absolute maximum ratings. 1/

| | |
|---|-----------------------|
| Input voltage range (V_{IN}) 2/ | -0.5 V dc to +50 V dc |
| Power dissipation (P_D)..... | 30 W |
| Lead temperature (10 seconds) | +300°C |
| Storage temperature | -65°C to +150°C |

1.4 Recommended operating conditions.

| | |
|--|----------------------|
| Input voltage range (V_{IN}) | +16 V dc to +40 V dc |
| Output power | 110 W |
| Case operating temperature range (T_C) | -55°C to +125°C |

2. APPLICABLE DOCUMENTS

2.1 Government specification, standards, and handbooks. The following specification, standards, and handbooks form a part of this drawing to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-38534 - Hybrid Microcircuits, General Specification for.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-883 - Test Method Standard Microcircuits.
MIL-STD-1835 - Interface Standard Electronic Component Case Outlines.

DEPARTMENT OF DEFENSE HANDBOOKS

MIL-HDBK-103 - List of Standard Microcircuit Drawings.
MIL-HDBK-780 - Standard Microcircuit Drawings.

(Copies of these documents are available online at <https://assist.daps.dla.mil/quicksearch/> or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.2 Order of precedence. In the event of a conflict between the text of this drawing and the references cited herein, the text of this drawing takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

- 1/ Stresses above the absolute maximum ratings may cause permanent damage to the device. Extended operation at the maximum levels may degrade performance and affect reliability.
- 2/ An undervoltage lockout circuit shuts the unit off when the input voltage drops to approximately 14.5 volts. Operation of the unit between 14.5 volts and 16 volts is nondestructive at reduced output power, but performance is not guaranteed.

| | | | |
|--|------------------|----------------------------|-------------------|
| STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990 | SIZE A | | 5962-99549 |
| | | REVISION LEVEL C | SHEET 3 |

3. REQUIREMENTS

3.1 Item requirements. The individual item performance requirements for device classes D, E, G, H, and K shall be in accordance with MIL-PRF-38534. Compliance with MIL-PRF-38534 shall include the performance of all tests herein or as designated in the device manufacturer's Quality Management (QM) plan or as designated for the applicable device class. The manufacturer may eliminate, modify or optimize the tests and inspections herein, however the performance requirements as defined in MIL-PRF-38534 shall be met for the applicable device class. In addition, the modification in the QM plan shall not affect the form, fit, or function of the device for the applicable device class.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-PRF-38534 and herein.

3.2.1 Case outline(s). The case outline(s) shall be in accordance with 1.2.4 herein and figure 1.

3.2.2 Terminal connections. The terminal connections shall be as specified on figure 2.

3.3 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in table I and shall apply over the full specified operating temperature range.

3.4 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table II. The electrical tests for each subgroup are defined in table I.

3.5 Marking of device(s). Marking of device(s) shall be in accordance with MIL-PRF-38534. The device shall be marked with the PIN listed in 1.2 herein. In addition, the manufacturer's vendor similar PIN may also be marked.

3.6 Data. In addition to the general performance requirements of MIL-PRF-38534, the manufacturer of the device described herein shall maintain the electrical test data (variables format) from the initial quality conformance inspection group A lot sample, for each device type listed herein. Also, the data should include a summary of all parameters manually tested, and for those which, if any, are guaranteed. This data shall be maintained under document revision level control by the manufacturer and be made available to the preparing activity (DLA Land and Maritime- VA) upon request.

3.7 Certificate of compliance. A certificate of compliance shall be required from a manufacturer in order to supply to this drawing. The certificate of compliance (original copy) submitted to DLA Land and Maritime- VA shall affirm that the manufacturer's product meets the performance requirements of MIL-PRF-38534 and herein.

3.8 Certificate of conformance. A certificate of conformance as required in MIL-PRF-38534 shall be provided with each lot of microcircuits delivered to this drawing.

4. VERIFICATION

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with MIL-PRF-38534 or as modified in the device manufacturer's Quality Management (QM) plan. The modification in the QM plan shall not affect the form, fit, or function as described herein.

| | | | |
|--|-------------------|-----------------------------|--------------------|
| STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990 | SIZE A | | 5962-99549 |
| | | REVISION LEVEL C | SHEET 4 |

TABLE I. Electrical performance characteristics.

| Test | Symbol | Conditions -55°C ≤ T _C ≤ +125°C V _{IN} = 28 V dc ±0.5 V dc no external sync, C _L = 0 unless otherwise specified | Group A subgroups | Device type | Limits | | Unit |
|------------------------------|--------------------|--|----------------------|----------------|--------|-------|--------|
| | | | | | Min | Max | |
| Output voltage | V _{OUT} | I _{OUT} = 9.2 A dc | 1 | 01 | 11.88 | 12.12 | V |
| | | | 2,3 | | 11.76 | 12.24 | |
| Output current | I _{OUT} | V _{IN} = 16, 28, and 40 V dc | 1,2,3 | 01 | | 9.2 | A |
| Output ripple voltage | V _{RIP} | I _{OUT} = 9.2 A, B.W. = 10 kHz to 20 MHz | 1 | 01 | | 100 | mV p-p |
| | | | 2,3 | | | 120 | |
| Line regulation | V _{RLINE} | I _{OUT} = 9.2 A V _{IN} = 16 V dc to 40 V dc, | 1,2,3 | 01 | | 20 | mV |
| Load regulation | V _{RLOAD} | I _{OUT} = 0 to 9.2 A | 1 | 01 | | 30 | mV |
| | | | 2,3 | | | 100 | |
| Input current | I _{IN} | I _{OUT} = 0 A, inhibit 1 (pin 4) = 0 | 1, 2, 3 | 01 | | 10 | mA |
| | | I _{OUT} = 0 A, inhibit 2 (pin 12) = 0 | | | | 70 | |
| | | I _{OUT} = 0 A, inhibit 1 and 2 (pins 4 and 12) = open | | | | 150 | |
| Input ripple current | I _{RIP} | I _{OUT} = 9.2 A, B.W. = 10 kHz to 20 MHz | 1 | 01 | | 120 | mA p-p |
| | | | 2, 3 | | | 130 | |
| Efficiency | E _{EFF} | I _{OUT} = 9.2 A | 1 | 01 | 84 | | % |
| | | | 2, 3 | | 83 | | |
| Isolation | ISO | Input to output or any pin to case at 500 V dc | 1 | 01 | 100 | | MΩ |
| Capacitive load <u>1/ 2/</u> | C _L | No effect on dc performance, | 4 | 01 | | 1000 | μF |

See footnotes at end of table.

**STANDARD
MICROCIRCUIT DRAWING**
DLA LAND AND MARITIME
COLUMBUS, OHIO 43218-3990

SIZE
A

REVISION LEVEL
C

5962-99549

SHEET
5

TABLE I. Electrical performance characteristics - Continued.

| Test | Symbol | Conditions -55°C ≤ T _C ≤ +125°C V _{IN} = 28 V dc ±0.5 V dc no external sync, C _L = 0 unless otherwise specified | Group A subgroups | Device type | Limits | | Unit |
|---|--------------------|--|----------------------|----------------|--------|------|-------|
| | | | | | Min | Max | |
| Power dissipation Short circuit | P _D | Short circuit | 1,2,3 | 01 | | 24 | W |
| Switching frequency | F _S | I _{OUT} = 9.2 A | 4 | 01 | 480 | 580 | kHz |
| | | | 5, 6 | | 460 | 600 | |
| External sync range <u>3/</u> | F _{SYNC} | I _{OUT} = 9.2 A, TTL level to pin 6 | 4,5,6 | 01 | 525 | 625 | kHz |
| Output response to step transient load changes <u>4/</u> | V _{TLOAD} | 50 percent load to/from 100 percent load | 4,5,6 | 01 | -600 | 600 | mV pk |
| Recovery time step transient load changes <u>2/ 4/ 5/</u> | T _{TLOAD} | 50 percent load to/from 100 percent load | 4,5,6 | 01 | | 300 | μs |
| Output response to transient step line changes <u>2/ 6/</u> | V _{TLINE} | I _{OUT} = 9.2 A, Input step from 16 V dc to 40 V dc | 4,5,6 | 01 | -600 | +600 | mV pk |
| | | I _{OUT} = 9.2 A, Input step from 40 V dc to 16 V dc | | | -600 | +600 | |
| Recovery time, transient step line changes <u>2/ 5/</u> | T _{TLINE} | I _{OUT} = 9.2 A, Input step from 16 V dc to 40 V dc | 4,5,6 | 01 | | 300 | μs |
| | | I _{OUT} = 9.2 A, Input step from 40 V dc to 16 V dc | | | | 300 | |
| Turn-on overshoot <u>3/</u> | V _{tonos} | I _{OUT} = 9.2 A, V _{IN} = 0 to 28 V dc | 4,5,6 | 01 | | 50 | mV pk |
| Turn-on delay time <u>7/</u> | T _{onD} | I _{OUT} = 9.2 A, V _{IN} = 0 to 40 V dc | 4,5,6 | 01 | | 10 | ms |
| Load fault recovery <u>2/</u> | T _{rLF} | I _{OUT} = 9.2 A | 4,5,6 | 01 | | 10 | ms |

1/ Capacitive load may be any value from 0 to the maximum limit without compromising dc performance.

2/ Parameter shall be tested as part of design characterization and after design or process changes; therefore, the parameter shall be guaranteed to the limits specified in table I.

3/ A TTL level waveform (V_{IH} = 4.5 V minimum, V_{IL} = 0.8 V maximum) with a 50 percent ±10 percent duty cycle applied to the sync input pin (pin 6) within the sync range frequency shall cause the converter's switching frequency to become synchronous with the frequency applied to the sync input pin (pin 6).

4/ Load step transition time is 10 microseconds minimum.

5/ Recovery time is measured from the initiation of the transient until V_{OUT} has returned to within ± 1 percent of its final value.

6/ Input step transition time greater than 10 microseconds.

7/ Turn-on delay time measurement is either for a step application of power at the input or the removal of a ground signal from the inhibit 1 pin (pin 4) or inhibit 2 pin (pin 12) while power is applied to the input.

**STANDARD
MICROCIRCUIT DRAWING**
DLA LAND AND MARITIME
COLUMBUS, OHIO 43218-3990


SIZE
A

REVISION LEVEL
C

5962-99549

SHEET
6

Case outline T.

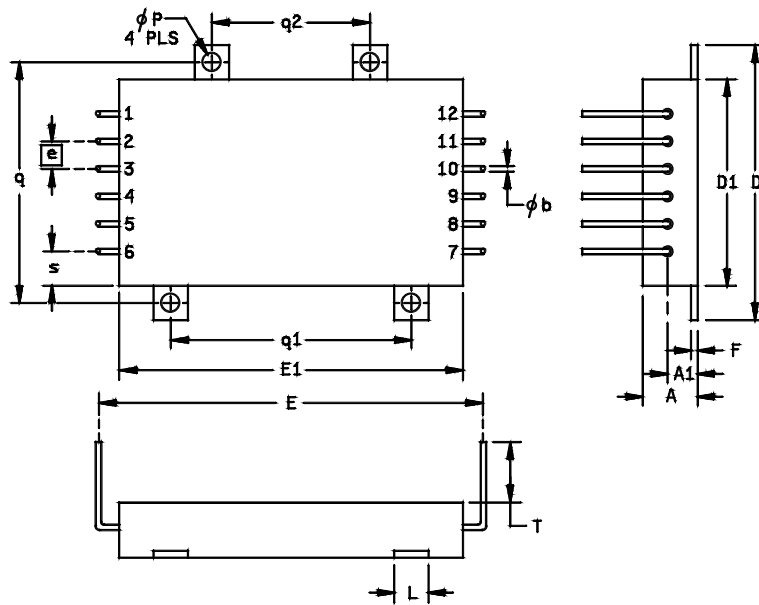

| Symbol | Millimeters | | Inches | |
|----------|-------------|-------|----------|-------|
| | Min | Max | Min | Max |
| A | | 10.16 | | .400 |
| A1 | 5.33 | 5.84 | .210 | .230 |
| ϕb | 0.89 | 1.14 | .035 | .045 |
| D | 50.55 | 51.05 | 1.990 | 2.010 |
| D1 | 37.85 | 38.35 | 1.490 | 1.510 |
| e | 5.08 BSC | | .200 BSC | |
| E | 69.85 | 72.39 | 2.750 | 2.850 |
| E1 | 63.25 | 63.75 | 2.490 | 2.510 |
| F | 1.14 | 1.40 | .045 | .055 |
| L | 6.10 | 6.60 | .240 | .260 |
| ϕP | 3.43 | 3.68 | .135 | .145 |
| q/q1 | 44.32 | 44.58 | 1.745 | 1.755 |
| q2 | 29.08 | 29.34 | 1.145 | 1.155 |
| s | 6.22 | 6.48 | .245 | .255 |
| T | 9.91 | 12.45 | .390 | .490 |

NOTES:

1. The U.S. government preferred system of measurement is the metric SI. This item was designed using inch-pound units of measurement. In case of problems involving conflicts between the metric and inch-pound units, the inch-pound units shall rule.
2. Device weight: 110 grams maximum.

FIGURE 1. Case outline(s).

**STANDARD
MICROCIRCUIT DRAWING**
DLA LAND AND MARITIME
COLUMBUS, OHIO 43218-3990


SIZE
A

REVISION LEVEL
C

5962-99549

SHEET
7

Case outline U.

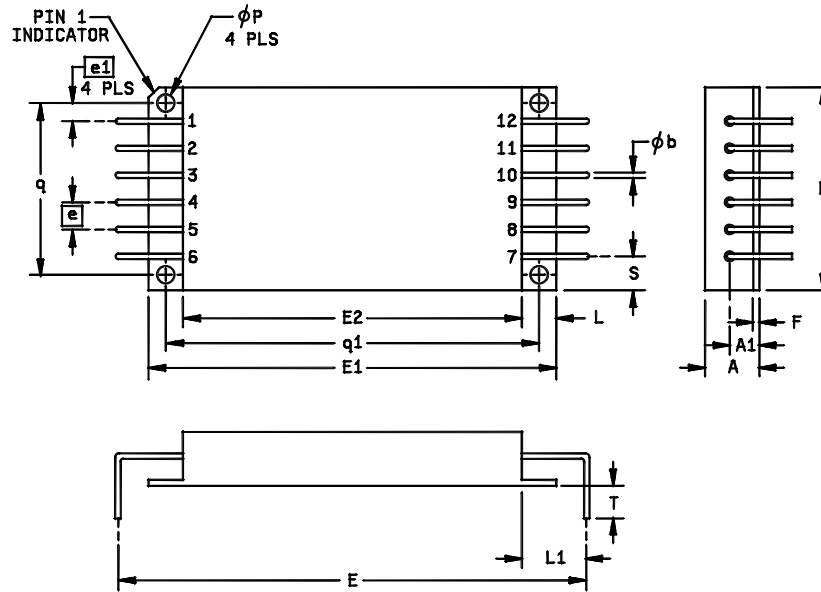

| Symbol | Millimeters | | Inches | |
|----------|-------------|-------|----------|-------|
| | Min | Max | Min | Max |
| A | | 10.16 | | .400 |
| A1 | 4.95 | 6.22 | .195 | .245 |
| ϕb | 0.89 | 1.14 | .035 | .045 |
| D | 37.72 | 38.23 | 1.485 | 1.505 |
| e | 5.08 BSC | | .200 BSC | |
| e1 | 3.30 BSC | | .130 BSC | |
| E | 87.38 | 87.88 | 3.440 | 3.460 |
| E1 | 75.82 | 76.33 | 2.985 | 3.005 |
| E2 | 63.37 | 63.63 | 2.495 | 2.505 |
| F | 1.14 | 1.40 | .045 | .055 |
| L | 6.10 | 6.60 | .240 | .260 |
| L1 | 11.81 | 12.32 | .465 | .485 |
| ϕP | 3.12 | 3.38 | .123 | .133 |
| q | 31.88 | 32.13 | 1.255 | 1.265 |
| q1 | 69.98 | 70.23 | 2.755 | 2.765 |
| S | 6.22 | 6.48 | .245 | .255 |
| T | 5.08 | 7.62 | .200 | .300 |


NOTES:

1. The U.S. government preferred system of measurement is the metric SI. This item was designed using inch-pound units of measurement. In case of problems involving conflicts between the metric and inch-pound units, the inch-pound units shall rule.
2. Device weight: 110 grams maximum.

FIGURE 1. Case outline(s) - Continued.

| | | | |
|--|------------------|----------------------------|-------------------|
| STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990 | SIZE A | | 5962-99549 |
| | | REVISION LEVEL C | SHEET 8 |

Case outline X.

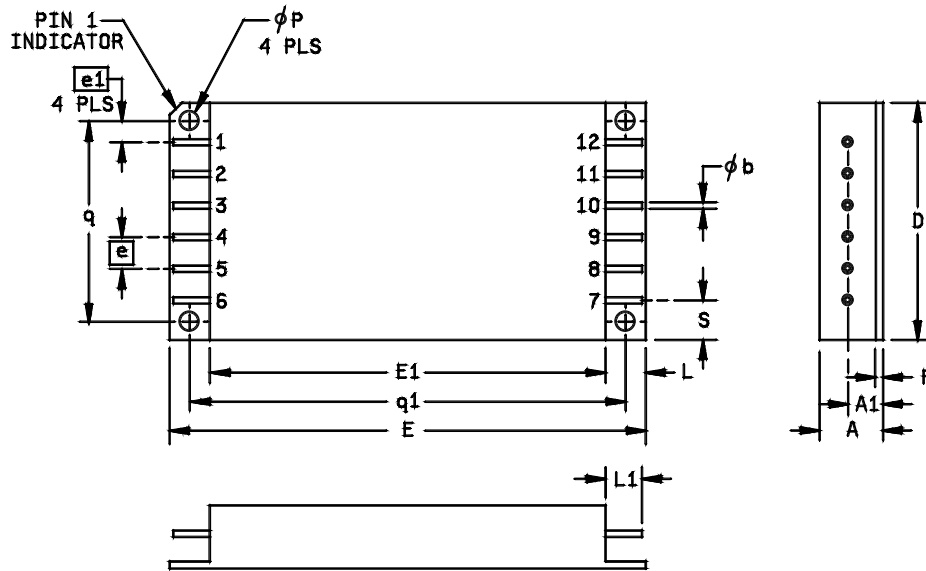

| Symbol | Millimeters | | Inches | |
|--------|-------------|-------|----------|-------|
| | Min | Max | Min | Max |
| A | | 10.16 | | .400 |
| A1 | 5.33 | 5.84 | .210 | .230 |
| φb | 0.89 | 1.14 | .035 | .045 |
| D | 37.72 | 38.23 | 1.485 | 1.505 |
| e | 5.08 BSC | | .200 BSC | |
| e1 | 3.30 BSC | | .130 BSC | |
| E | 75.82 | 76.33 | 2.985 | 3.005 |
| E1 | 63.37 | 63.63 | 2.495 | 2.505 |
| F | 1.14 | 1.40 | .045 | .055 |
| L | 6.10 | 6.60 | .240 | .260 |
| L1 | 6.35 | 8.89 | .250 | .350 |
| φP | 3.12 | 3.38 | .123 | .133 |
| q | 31.88 | 32.13 | 1.255 | 1.265 |
| q1 | 69.98 | 70.23 | 2.755 | 2.765 |
| S | 6.22 | 6.48 | .245 | .255 |


NOTES:

1. The U.S. government preferred system of measurement is the metric SI. This item was designed using inch-pound units of measurement. In case of problems involving conflicts between the metric and inch-pound units, the inch-pound units shall rule.
2. Device weight: 110 grams maximum.

FIGURE 1. Case outline(s) - Continued.

| | | | |
|--|-------------------|-----------------------------|--------------------|
| STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990 | SIZE A | | 5962-99549 |
| | | REVISION LEVEL C | SHEET 9 |

Case outline Y.

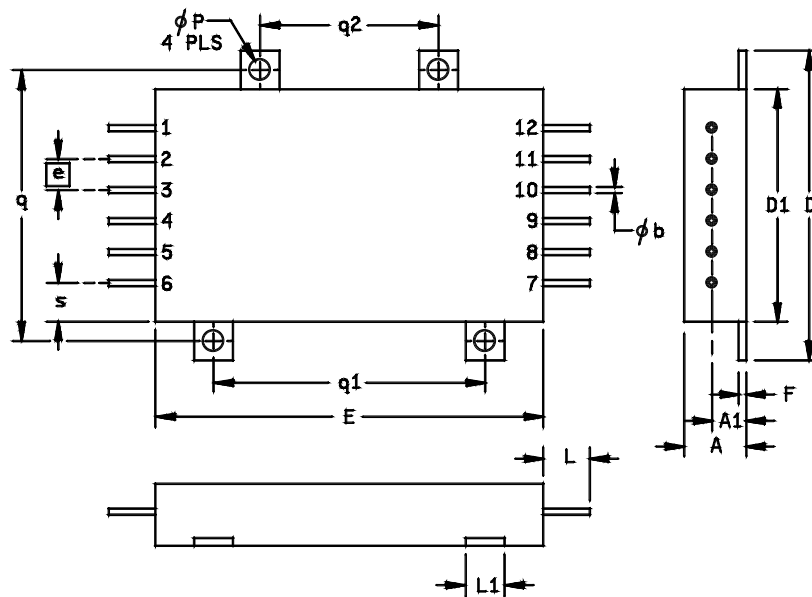

| Symbol | Millimeters | | Inches | |
|--------|-------------|-------|----------|-------|
| | Min | Max | Min | Max |
| A | | 10.16 | | .400 |
| A1 | 5.33 | 5.84 | .210 | .230 |
| φb | 0.89 | 1.14 | .035 | .045 |
| D | 50.55 | 51.05 | 1.990 | 2.010 |
| D1 | 37.85 | 38.35 | 1.490 | 1.510 |
| e | 5.08 BSC | | .200 BSC | |
| E | 63.25 | 63.75 | 2.490 | 2.510 |
| F | 1.14 | 1.40 | .045 | .055 |
| L | 6.35 | 8.89 | .250 | .350 |
| L1 | 6.10 | 6.60 | .240 | .260 |
| φP | 3.43 | 3.68 | .135 | .145 |
| q/q1 | 44.32 | 44.58 | 1.745 | 1.755 |
| q2 | 29.08 | 29.34 | 1.145 | 1.155 |
| s | 6.22 | 6.48 | .245 | .255 |

NOTES:

1. The U.S. government preferred system of measurement is the metric SI. This item was designed using inch-pound units of measurement. In case of problems involving conflicts between the metric and inch-pound units, the inch-pound units shall rule.
2. Device weight: 110 grams maximum.

FIGURE 1. Case outline(s) - Continued.

**STANDARD
MICROCIRCUIT DRAWING**
DLA LAND AND MARITIME
COLUMBUS, OHIO 43218-3990


SIZE
A

REVISION LEVEL
C

5962-99549

SHEET
10

Case outline Z.

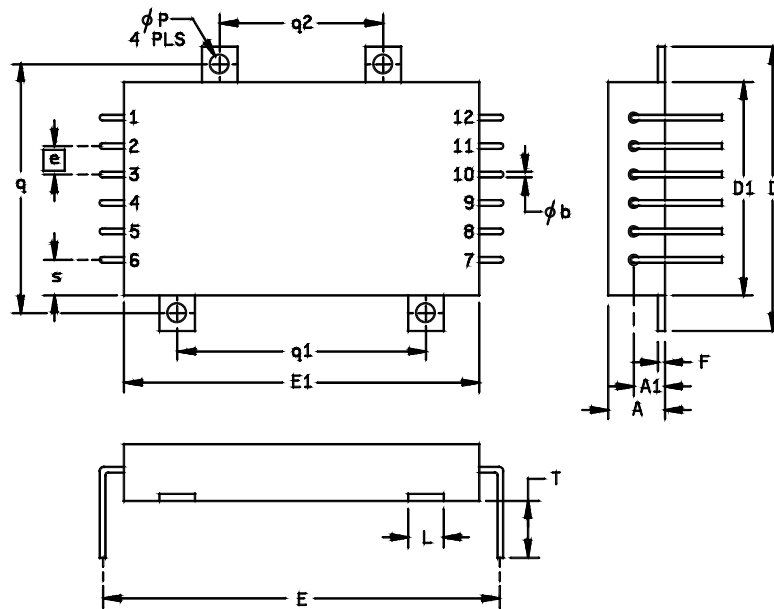

| Symbol | Millimeters | | Inches | |
|--------|-------------|-------|-----------|-------|
| | Min | Max | Min | Max |
| A | | 10.16 | | .400 |
| A1 | 5.33 | 5.84 | .210 | .230 |
| φb | 0.89 | 1.14 | .035 | .045 |
| D | 50.55 | 51.05 | 1.990 | 2.010 |
| D1 | 37.85 | 38.35 | 1.490 | 1.510 |
| e | 5.08 BSC | | 0.200 BSC | |
| E | 69.85 | 72.39 | 2.750 | 2.850 |
| E1 | 63.25 | 63.75 | 2.490 | 2.510 |
| F | 1.14 | 1.40 | .045 | .055 |
| L | 6.10 | 6.60 | .240 | .260 |
| φP | 3.43 | 3.68 | .135 | .145 |
| q/q1 | 44.32 | 44.58 | 1.745 | 1.755 |
| q2 | 29.08 | 29.34 | 1.145 | 1.155 |
| s | 6.22 | 6.48 | .245 | .255 |
| T | 7.87 | 10.41 | .310 | .410 |

NOTES:

1. The U.S. government preferred system of measurement is the metric SI. This item was designed using inch-pound units of measurement. In case of problems involving conflicts between the metric and inch-pound units, the inch-pound units shall rule.
2. Device weight: 110 grams maximum.

FIGURE 1. Case outline(s) - Continued.

| | | | |
|--|------------------|----------------------------|--------------------|
| STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990 | SIZE A | | 5962-99549 |
| | | REVISION LEVEL C | SHEET 11 |

| | |
|-----------------|-----------------------|
| Device types | 01 |
| Case outlines | T, U, X, Y, and Z |
| Terminal number | Terminal symbol |
| 1 | Input |
| 2 | Input return |
| 3 | Trim |
| 4 | Inhibit 1 |
| 5 | Sync output |
| 6 | Sync input |
| 7 | Positive output |
| 8 | Output return |
| 9 | Remote sense return |
| 10 | Positive remote sense |
| 11 | Share |
| 12 | Inhibit 2 |

FIGURE 2. Terminal connections.

| | | | |
|--|------------------|----------------------------|--------------------|
| STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990 | SIZE A | | 5962-99549 |
| | | REVISION LEVEL C | SHEET 12 |

TABLE II. Electrical test requirements.

| MIL-PRF-38534 test requirements | Subgroups (in accordance with MIL-PRF-38534, group A test table) |
|--|---|
| Interim electrical parameters | --- |
| Final electrical parameters | 1*, 2, 3, 4, 5, 6 |
| Group A test requirements | 1, 2, 3, 4, 5, 6 |
| Group C end-point electrical <u>1/</u> parameters | 1,2,3 |
| End-point electrical parameters for radiation hardness assurance (RHA) devices | Not applicable |

1/ As a minimum, for all Group C testing performed after (11-04-13) manufacturers shall perform subgroups 1, 2, and 3 from the Group A electrical test table (Table C-Xa of MIL-PRF-38534).

* PDA applies to subgroup 1.

4.2 Screening. Screening shall be in accordance with MIL-PRF-38534. The following additional criteria shall apply:

a. Burn-in test, method 1015 of MIL-STD-883.

(1) Test condition A, B, C, or D. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to either DLA Land and Maritime- VA or the acquiring activity upon request. Also, the test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1015 of MIL-STD-883.

(2) T_A as specified in accordance with table I of method 1015 of MIL-STD-883.

b. Interim and final electrical test parameters shall be as specified in table II herein, except interim electrical parameter tests prior to burn-in are optional at the discretion of the manufacturer.

4.3 Conformance and periodic inspections. Conformance inspection (CI) and periodic inspection (PI) shall be in accordance with MIL-PRF-38534 and as specified herein.

4.3.1 Group A inspection (CI). Group A inspection shall be in accordance with MIL-PRF-38534 and as follows:

a. Tests shall be as specified in table II herein.

b. Subgroups 7, 8, 9, 10, and 11 shall be omitted.

4.3.2 Group B inspection (PI). Group B inspection shall be in accordance with MIL-PRF-38534.

**STANDARD
MICROCIRCUIT DRAWING**
DLA LAND AND MARITIME
COLUMBUS, OHIO 43218-3990

SIZE
A

REVISION LEVEL
C

5962-99549

SHEET
13

4.3.3 Group C inspection (PI). Group C inspection shall be in accordance with MIL-PRF-38534 and as follows:

- a. End-point electrical parameters shall be as specified in table II herein.
- b. Steady-state life test, method 1005 of MIL-STD-883.
 - (1) Test condition A, B, C, or D. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to either DLA Land and Maritime- VA or the acquiring activity upon request. Also, the test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1005 of MIL-STD-883.
 - (2) T_A as specified in accordance with table I of method 1005 of MIL-STD-883.
 - (3) Test duration: 1,000 hours, except as permitted by method 1005 of MIL-STD-883.

4.3.4 Group D inspection (PI). Group D inspection shall be in accordance with MIL-PRF-38534.

4.3.5 Radiation Hardness Assurance (RHA) inspection. RHA inspection is not currently applicable to this drawing.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-PRF-38534.

6. NOTES

6.1 Intended use. Microcircuits conforming to this drawing are intended for use for Government microcircuit applications (original equipment), design applications, and logistics purposes.

6.2 Replaceability. Microcircuits covered by this drawing will replace the same generic device covered by a contractor-prepared specification or drawing.

6.3 Configuration control of SMD's. All proposed changes to existing SMD's will be coordinated as specified in MIL-PRF-38534.

6.4 Record of users. Military and industrial users shall inform DLA Land and Maritime when a system application requires configuration control and the applicable SMD. DLA Land and Maritime will maintain a record of users and this list will be used for coordination and distribution of changes to the drawings. Users of drawings covering microelectronic devices (FSC 5962) should contact DLA Land and Maritime- VA, telephone (614) 692-0544.

6.5 Comments. Comments on this drawing should be directed to DLA Land and Maritime- VA, Columbus, Ohio 43218-3990, or telephone (614) 692-1081.

6.6 Sources of supply. Sources of supply are listed in MIL-HDBK-103 and QML-38534. The vendors listed in MIL-HDBK-103 and QML-38534 have submitted a certificate of compliance (see 3.7 herein) to DLA Land and Maritime- VA and have agreed to this drawing.

| | | | |
|--|-------------------|-----------------------------|---------------------|
| STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990 | SIZE A | | 5962-99549 |
| | | REVISION LEVEL C | SHEET 14 |

STANDARD MICROCIRCUIT DRAWING BULLETIN

DATE: 11-04-13

Approved sources of supply for SMD 5962-99549 are listed below for immediate acquisition information only and shall be added to MIL-HDBK-103 and QML-38534 during the next revisions. MIL-HDBK-103 and QML-38534 will be revised to include the addition or deletion of sources. The vendors listed below have agreed to this drawing and a certificate of compliance has been submitted to and accepted by DLA Land and Maritime- VA. This bulletin is superseded by the next dated revisions of MIL-HDBK-103 and QML-38534. DLA Land and Maritime maintains an online database of all current sources of supply at <http://www.dscc.dla.mil/Programs/Smcr/>.

| Standard microcircuit drawing PIN <u>1</u> / | Vendor CAGE number | Vendor similar PIN <u>2</u> / |
|--|--------------------------|-------------------------------------|
| 5962-9954901HTA 5962-9954901HTC | 50821 50821 | MOR2812SW/883 MOR2812SW/883 |
| 5962-9954901HUA 5962-9954901HUC | 50821 50821 | MOR2812SV/883 MOR2812SV/883 |
| 5962-9954901HXA 5962-9954901HXC | 50821 50821 | MOR2812S/883 MOR2812S/883 |
| 5962-9954901HYA 5962-9954901HYC | 50821 50821 | MOR2812SY/883 MOR2812SY/883 |
| 5962-9954901HZA 5962-9954901HZC | 50821 50821 | MOR2812SZ/883 MOR2812SZ/883 |

- 1/ The lead finish shown for each PIN representing a hermetic package is the most readily available from the manufacturer listed for that part. If the desired lead finish is not listed contact the Vendor to determine its availability.
- 2/ Caution. Do not use this number for item acquisition. Items acquired to this number may not satisfy the performance requirements of this drawing.

Vendor CAGE
number

50821

Vendor name
and address

Interpoint Corporation
DBA Crane Electronics-Redmond
10301 Willows Road
Redmond, WA 98073-9705

The information contained herein is disseminated for convenience only and the Government assumes no liability whatsoever for any inaccuracies in the information bulletin.