
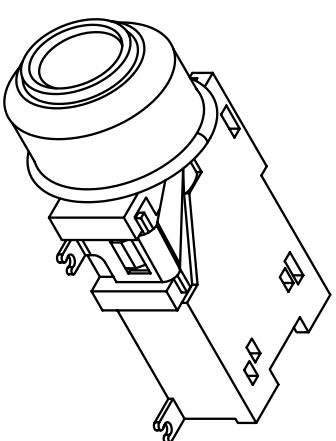



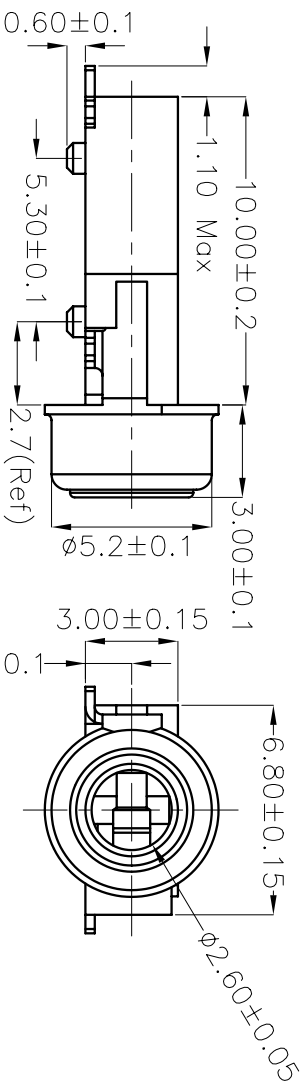

Specifications

Rated Voltage: 16VDC

Rated Current: 300mA

Contact Resistance: 100 mOHMS or less under all conditions including


after life testing.

Insulation Resistance: 100 M OHMS or greater at 500VDC

Dielectric Withstand

Voltage: 500VAC RMS for 1 Minute.

Life: 5,000 cycles min.

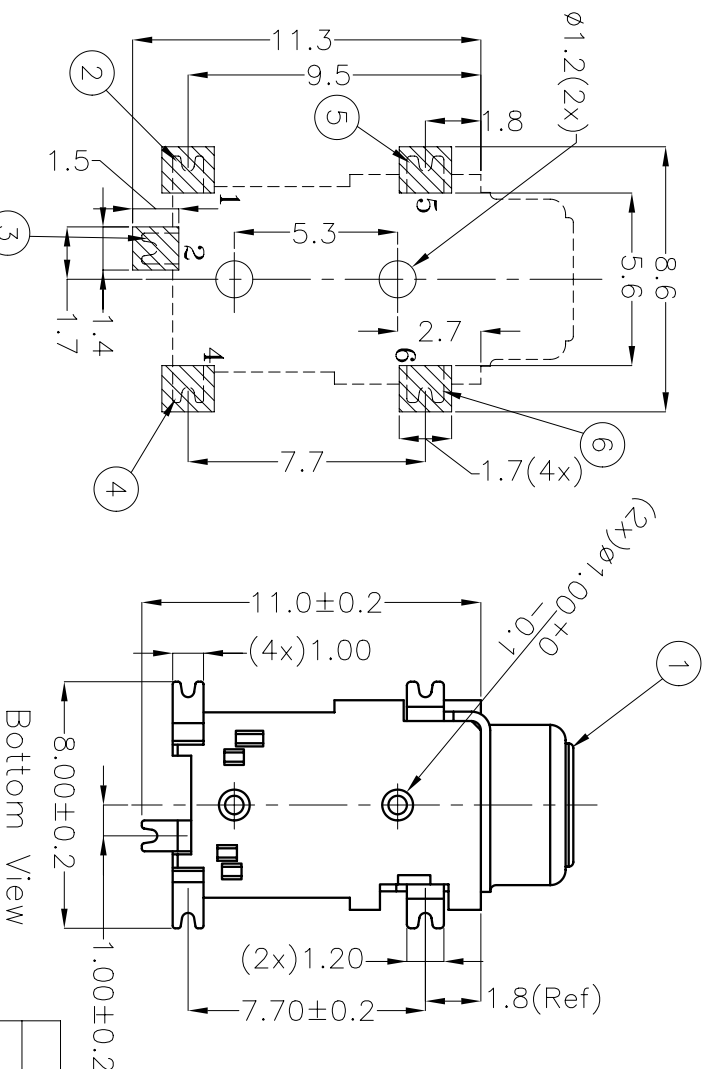

Soldering Pads
(Top View)



6.	Front Shell<M6>	Cu Alloy		Au Flash	25T
5.	Ground<M5>	Cu Alloy		Silver	20T
4.	Tip Contact<M4>	Cu Alloy		Silver	20T
3.	Shunt (Ring)<M2>	Cu Alloy		Silver	25T
2.	Ring Contact<M1>	Cu Alloy		Silver	20T
1.	Plastic Housing<P1>	LCP	Black		UL94V-0 Rated
Item	Term	Material	Color	Plating	Remark



9615 SW Allen, Suite 103
Beaverton, OR 97005
Phone: (503) 643-4899
800-275-4899
Fax: (503) 643-6129
Website: www.cuistack.com

TITLE: SMT Audio Jack w/4 Conductors 2.5mm

PART NO.	UNITS:
SJ-42525RS-SMT	Millimeters
DRAWN BY: Todd R. White	APPROVED BY:
SCALE: 4x	