

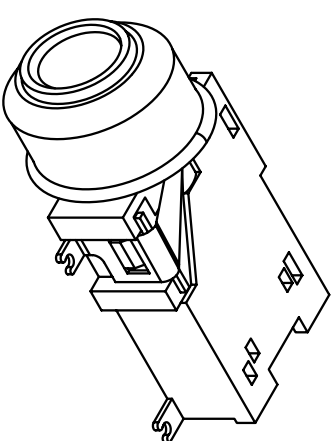



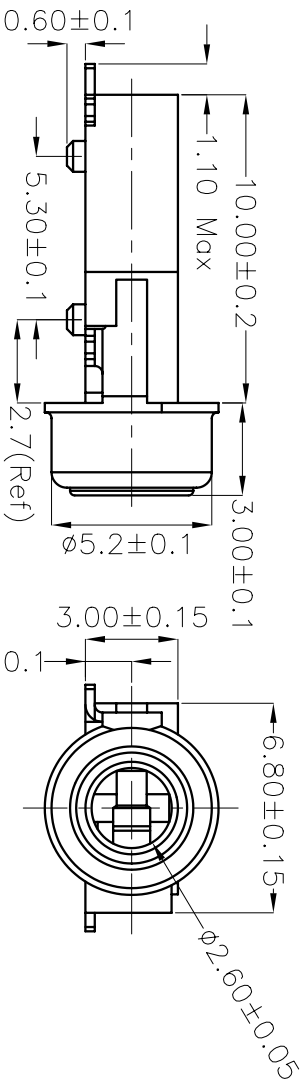

Soldering Pads (Top View)

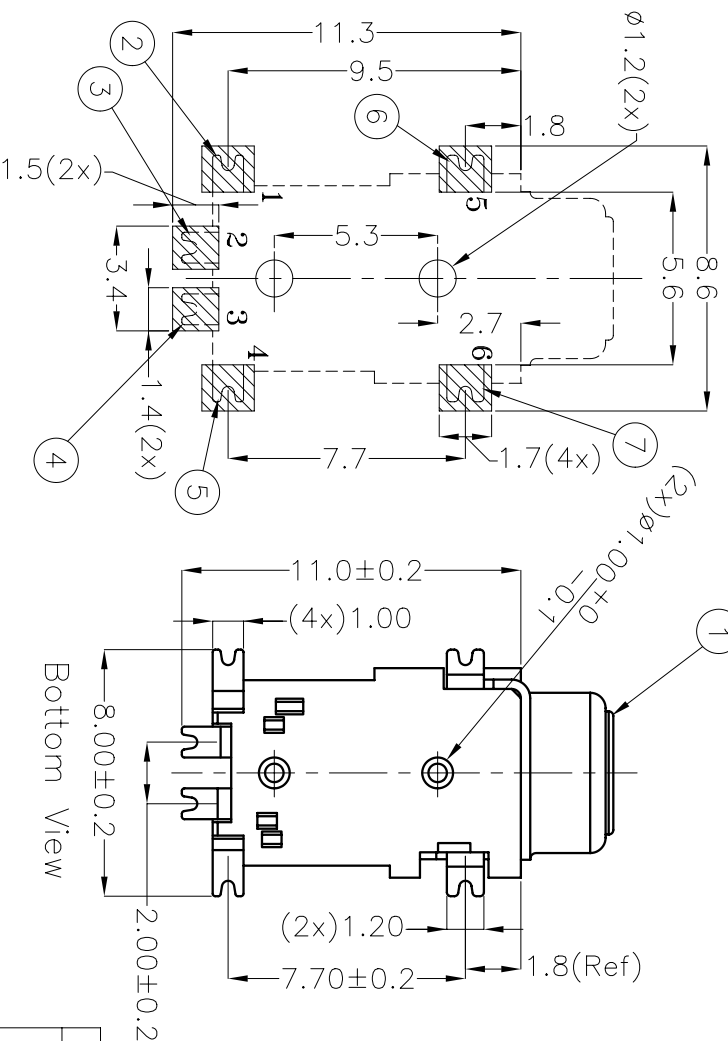

Specifications
 Rated Voltage: 16VDC
 Rated Current: 300mA
 Contact Resistance: 100 mOHMS or less under all conditions including after life testing.
 Insulation Resistance: 100 M OHMS or greater at 500VDC
 Dielectric Withstand Voltage: 500VAC RMS for 1 Minute.
 Life: 5,000 cycles min.

7. Front Shell<M6>	Cu Alloy	Au Flash	25T	
6. Ground<M5>	Cu Alloy	Silver	20T	
5. Tip Contact<M4>	Cu Alloy	Silver	20T	
4. Shunt (Tip)<M3>	Cu Alloy	Silver	25T	
3. Shunt (Ring)<M2>	Cu Alloy	Silver	25T	
2. Ring Contact<M1>	Cu Alloy	Silver	20T	
1. Plastic Housing<P1>	LCP	Black		UL94V-0 Rated
Item	Material	Color	Plating	Remark



9615 SW Allen, Suite 103
 Beaverton, OR 97005
 Phone: (503) 643-4899
 800-275-4899
 Fax: (503) 643-6129
 Website: www.cuistack.com

TITLE: SMT Audio Jack w/4 Conductors 2.5mm

PART NO. SJ-42526-SMT UNITS: Millimeters

DRAWN BY: Todd R. White APPROVED BY: SCALE: 4x

