


Features

- Universal AC input / Full range
- Low leakage current 0.3mA
- Protections:Short circuit/Over load/Over voltage
- Cooling by free air convection
- 100% full load burn-in test
- Fixed switching frequency at 45KHz
- 3 year warranty

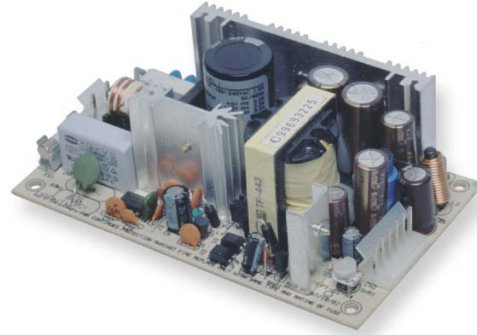


	CH1	CH2	CH3
DC output voltage	5V	12V	-12V
Output V. tolerance	±4%	±10, -7%	±5%
Output rated current	5.5A	2.5A	0.5A
Output min. range	0.4A	0.2A	0A
Output max. range	7A	3.2A	0.7A
Ripple & noise	60m	160m	100m
Line regulation	±1%	±2%	±1%
Load regulation	±3%	±4%	±1%
Rated output power	63.5W		
Rated output power	72W with 18CFM min. forced air convection		
Efficiency	74%		
DC voltage adj.	CH1: ±10%		
Input voltage range	90~264VAC 47~4403Hz; 120-370VDC		
AC current	1.6A/115V 1A/230V		
Inrush current	cold start 20A/115V 40A/230V		
Leakage current	<0.3mA/264VAC		
Overload protection	73~95W type: Hiccup mode, recovers automatically after fault condition is removed		
Over voltage protection	CH1: 5.75~6.75VDC		
Temperature coefficient	±0.04% / °C (0~50°C) on +5V output		
Set up, rise, hold up time	800ms, 20ms, 20ms/230VAC 800ms, 20ms, 12ms /115VAC		
Vibration	10~500Hz, 2G 3 axes 10min./1 cycle (1 hour each axes)		
Withstand voltage	I/P-O/P: 3KVAC, I/P-FG: 1.5KVAC, O/P-FG: 0.5KVAC, for 1 min.		
Isolation resistance	I/P-O/P, I/P-FG, O/P-FG: 500VDC / 100M Ohms min.		
Working temp., humidity	-10°C~+60% (refer to output derating curve), 20%-90% RH		
Storage temp., humidity	-20°C~+85°C, 10%-95% RH		
Dimensions	5x3x1.65 inches PCB only (127x76.2x42 mm)		
Weight	0.6 lbs (0.27Kgs)		
Safety standards	UL2601-1, EN60601-1 approved		
EMC standards	CISPR11 (EN55011), EN61000-4,2,3,4,5,6,8,11 IEC61000-3-2,3 EN60601-1-2 verification		

Notes:


1. All parameters are specified at 230VAC input, rated load, 25°C 70% RH ambient
2. Tolerance includes set up tolerance, line regulation, load regulation
3. Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uF & 47 uF capacitor
4. Line regulation is measured from low line to high line at rated load
5. Mounting holes M1 and M2 should be grounded for EMI purposes

V-Infinity reserves the right to make changes to its products or to discontinue any product or service without notice, and to advise customers to verify the most up-to-date product information before placing orders. V-Infinity assumes no liability or responsibility for customer's applications using V-Infinity products other than repair or replacing (at V-I's option) V-Infinity products not meeting V-I's published specifications. Nothing will be covered outside of standard product warranty.


Block Diagram

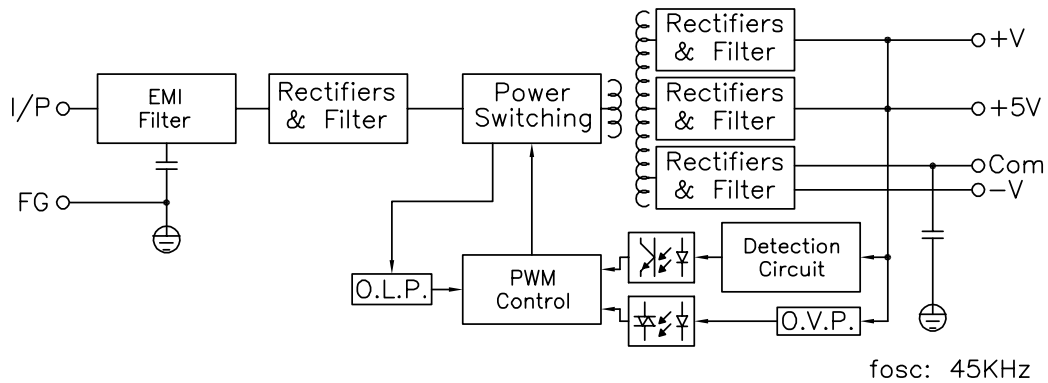

Output Derating

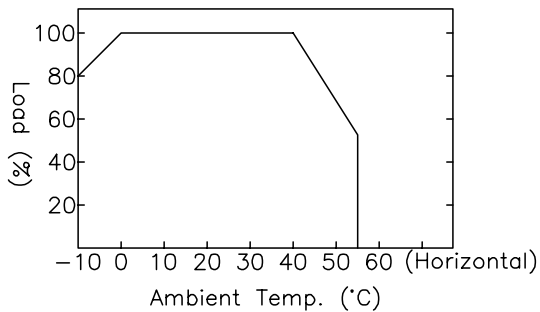

Static Characteristics

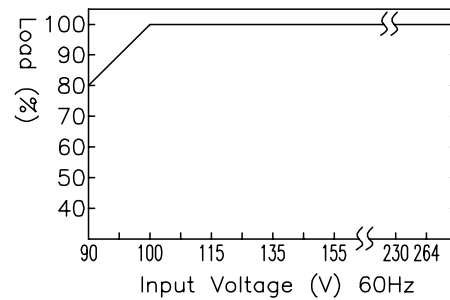

Dimensions (mm)

Terminal Pin No. Assignment

CN1: MOLEX 5277-02
 PIN 1,2: AC INPUT
 CN2: MOLEX 5273-06
 PIN 1: DC OUTPUT +V
 PIN 2,3: DC OUTPUT +5V
 PIN 4,5: DC OUTPUT COM
 PIN 6: DC OUTPUT -V

Mating Connectors

CN1,2 Mating Connector type
 Molex 5195 and 5239 series
 or equivalent with Molex
 5194 and 5225 or equivalent
 crimp terminals.

