



- .LOW COST, HIGH RELIABILITY
- .105°C OUTPUT CAPACITOR
- .INTERNATIONAL AC INPUT RANGE
- .HIGH EFFICIENCY, LOW WORKING TEMPERATURE
- .SOFT-START CIRCUIT, LIMITING AC SURGE CURRENT
- .SHORT CIRCUIT, OVERLOAD, OVER VOLTAGE PROTECTED
- .CH4:± POLARITY IS SELECTABLE
- .BUILT IN REMOTE SENSE CH1,CH2
- .POWER GOOD AND FAIL SIGNAL(OPTION)



MODEL	VQP-200D				VQP-200F				VQP-200-3A			
	CH1	CH2	CH3	CH4	CH1	CH2	CH3	CH4	CH1	CH2	CH3	CH4
DC OUTPUT VOLTAGE	5V	12V	24V	-12V	5V	15V	24V	-15V	5V	3.3V	12V	-5V
OUTPUT V. TOLERANCE	±3%	±3%	+10,-6%	±6%	±3%	±3%	+10,-6%	±6%	±3%	±3%	+8,-10%	±6%
OUTPUT RATED CURRENT	15A	4A	3A	0.7A	15A	3A	3A	0.7A	15A	15A	6A	0.7A
OUTPUT CURRENT RANGE	3-20A	0-6A	0.4-5A	0-1A	3-20A	0-5A	0.4-5A	0-1A	3-20A	0-20A	0.5-8A	0-1A
PEAK CURRENT	20A	7A	6A	1A	20A	6A	6A	1A	20A	20A	8A	1A
RIPPLE & NOISE (p-p)	100mV	150mV	150mV	150mV	100mV	150mV	150mV	150mV	100mV	100mV	150mV	150mV
LINE REGULATION	±1%	±1%	±2%	±1%	±1%	±1%	±2%	±1%	±1%	±1%	±2%	±1%
LOAD REGULATION	±2%	±2%	±6%	±2%	±2%	±2%	±6%	±2%	±2%	±2%	±6%	±2%
DC OUTPUT POWER	203.4W				202.5W				200W			
EFFICIENCY	75%				75%				72%			
DC VOLTAGE ADJ.	CH1,2:±10,-5%											
INPUT VOLTAGE RANGE	90~264VAC 47~63Hz; 120~370VDC											
AC CURRENT	3.5A/115V 2A/230V											
INRUSH CURRENT	COLD START 45A											
LEAKAGE CURRENT	<2mA/240VAC											
OVERLOAD PROTECTION	105% ~150% RESET:AUTO RECOVERY											
OVER VOLTAGE PROTECTION	CH1:5.75~6.75V CH2:13.8~16.2V				CH1:5.75~6.75V CH2:17.25~20.25V				CH1:5.75~6.75V CH2:3.8~4.4V			
OVER TEMP. PROTECTION	95°C~±5°C (TSW1)TYPE:SHUTDOWN RESET:AUTO RECOVERY											
TEMP. COEFFICIENT	±0.03% / °C (0~50°C)											
SETUP, RISE, HOLD UP TIME	800ms, 50ms, 16ms											
POWER FACTOR	PF>0.95/230VAC, PF>0.98/115VAC											
OUTPUT GOOD/INPUT POWER FAIL (OPTION)	10ms/1ms											
VIBRATION	10~500Hz, 2G 10min./1cycle, PERIOD FOR 60min. EACH AXES											
WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC											
ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:500VDC / 100M Ohms											
WORKING TEMP., HUMIDITY	-10°C~+60°C(REFER TO OUTPUT DERATING CURVE), 20% ~90% RH											
STORAGE TEMP., HUMIDITY	-20°C~+85°C, 10% ~95% RH											
DIMENSION	(230*115*50mm) CASE:912											
WEIGHT	1.1Kgs											
SAFETY STANDARDS	MEET UL1950, TUV EN60950											
EMC STANDARDS	MEET EN55022 (CISPR22) CLASS B, EN50082,EN55024											

NOTE : 1.ALL PARAMETERS ARE SPECIFIED AT 230VAC INPUT, RATED LOAD, 25° C 70% RH. AMBIENT.
2.TOLERANCE GINCLUDE SET UP TOLERANCE, LINE REGULATION, LOAD REGULATION.
3.PEAK CURRENT CAN NOT EXCEED 30 SEC.
4.RIPPLE & NOISE ARE MEASURED AT 20MHz BY USING A 12" TWISTED PAIR TERMINATED WITH A 0.1uF & 47uF CAPACITOR.
5.LINE REGULATION IS MEASURED FROM LOW LINE TO HIGH LINE AT RATED LOAD.
6.LOAD REGULATION IS MEASURED FROM 20% TO 100% RATED LOAD, AND OTHER OUTPUT AT 60% RATED LOAD.
7.EACH OUTPUT PROVIDE UP TO MAXIMUM CURRENT, BUT TATAL LOAD CAN NOT EXCEED MAX. OUTPUT POWER.

2001-05-11



V-INFINITY

VQP-200 Series Switching Power Supplies

- .LOW COST, HIGH RELIABILITY
- .105° C OUTPUT CAPACITOR
- .INTERNATIONAL AC INPUT RANGE
- .HIGH EFFICIENCY, LOW WORKING TEMPERATURE
- .SOFT-START CIRCUIT, LIMITING AC SURGE CURRENT
- .SHORT CIRCUIT, OVERLOAD, OVER VOLTAGE PROTECTED
- .CH4: $\pm$ POLARITY IS SELECTABLE
- .BUILT IN REMOTE SENSE CH1,CH2
- .POWER GOOD AND FAIL SIGNAL(OPTION)



MODEL	VQP-200-3B				VQP-200-3C				VQP-200-3D			
	CH1	CH2	CH3	CH4	CH1	CH2	CH3	CH4	CH1	CH2	CH3	CH4
DC OUTPUT VOLTAGE	5V	3.3V	12V	-12V	5V	3.3V	15V	-15V	5V	3.3V	24V	-12V
OUTPUT V. TOLERANCE	± 3%	± 3%	+8, -10%	± 6%	± 3%	± 3%	+10, -6%	± 6%	± 3%	± 3%	+10, -6%	± 6%
OUTPUT RATED CURRENT	15A	15A	6A	0.7A	15A	15A	5A	0.7A	10A	15A	4A	0.7A
OUTPUT CURRENT RANGE	3-20A	0-20A	0.5-8A	0-1A	3-20A	0-20A	0.5-6A	0-1A	3-15A	0-20A	0.4-5A	0-1A
PEAK CURRENT	20A	20A	8A	1A	20A	20A	7A	1A	20A	20A	6A	1A
RIPPLE & NOISE (p-p)	100mV	100mV	150mV	150mV	100mV	100mV	150mV	150mV	100mV	100mV	150mV	150mV
LINE REGULATION	± 1%	± 1%	± 2%	± 1%	± 1%	± 1%	± 2%	± 1%	± 1%	± 1%	± 2%	± 1%
LOAD REGULATION	± 2%	± 2%	± 6%	± 2%	± 2%	± 2%	± 6%	± 2%	± 2%	± 2%	± 6%	± 2%
DC OUTPUT POWER	204.9W				210W				203.9W			
EFFICIENCY	72%				72%				74%			
DC VOLTAGE ADJ.	CH1,2: +10, -5%											
INPUT VOLTAGE RANGE	90-264VAC 47-63Hz; 120-370VDC											
AC CURRENT	3.5A/115V 2A/230V											
INRUSH CURRENT	COLD START 45A											
LEAKAGE CURRENT	<2mA/240VAC											
OVERLOAD PROTECTION	105%-150% RESET:AUTO RECOVERY											
OVER VOLTAGE PROTECTION	CH1:5.75-6.75V, CH2: 3.8-4.4V											
OVER TEMP. PROTECTION	95° C-± 5° C (TSW1)TYPE:SHUTDOWN RESET:AUTO RECOVERY											
TEMP. COEFFICIENT	± 0.03% / ° C (0-50° C)											
SETUP, RISE, HOLD UP TIME	800ms, 50ms, 16ms											
POWER FACTOR	PF>0.95/230VAC, PF>0.98/115VAC											
OUTPUT GOOD/INPUT POWER FAIL(OPTION)	10ms/1ms											
VIBRATION	10-500Hz, 2G 10min./1cycle, PERIOD FOR 60min. EACH AXES											
WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC											
ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:500VDC / 100M Ohms											
WORKING TEMP., HUMIDITY	-10° C-+60° C(REFER TO OUTPUT DERATING CURVE), 20%-90% RH											
STORAGE TEMP., HUMIDITY	-20° C-+85° C, 10%-95% RH											
DIMENSION	(230*115*50mm) CASE:912											
WEIGHT	1.1Kgs											
SAFETY STANDARDS	MEET UL1950, TUV EN60950											
EMC STANDARDS	MEET EN55022 (CISPR22) CLASS B, EN50082,EN55024											

- NOTE :
- 1.ALL PARAMETERS ARE SPECIFIED AT 230VAC INPUT, RATED LOAD, 25° C 70% RH. AMBIENT.
 - 2.TOLERANCE : INCLUDE SET UP TOLERANCE, LINE REGULATION, LOAD REGULATION.
 - 3.PEAK CURRENT CAN NOT EXCEED 30 SEC.
 - 4.RIPPLE & NOISE ARE MEASURED AT 20MHz BY USING A 12" TWISTED PAIR TERMINATED WITH A 0.1uF & 47uF CAPACITOR.
 - 5.LINE REGULATION IS MEASURED FROM LOW LINE TO HIGH LINE AT RATED LOAD.
 - 6.LOAD REGULATION IS MEASURED FROM 20% TO 100% RATED LOAD, AND OTHER OUTPUT AT 60% RATED LOAD.
 - 7.EACH OUTPUT PROVIDE UP TO MAXIMUM CURRENT, BUT TATAL LOAD CAN NOT EXCEED MAX. OUTPUT POWER.

2001-05-11

NEXT (MECHANICAL INFO.)

- .LOW COST, HIGH RELIABILITY
- .105° C OUTPUT CAPACITOR
- .INTERNATIONAL AC INPUT RANGE
- .HIGH EFFICIENCY, LOW WORKING TEMPERATURE
- .SOFT-START CIRCUIT, LIMITING AC SURGE CURRENT
- .SHORT CIRCUIT, OVERLOAD, OVER VOLTAGE PROTECTED
- .CH4: ± POLARITY IS SELECTABLE
- .BUILT IN REMOTE SENSE CH1,CH2
- .POWER GOOD AND FAIL SIGNAL (OPTION)




MODEL	VQP-200-3E			
SPECIFICATION	CH1	CH2	CH3	CH4
DC OUTPUT VOLTAGE	5V	3.3V	24V	-15V
OUTPUT V. TOLERANCE	± 3%	± 3%	+10, -6%	± 6%
OUTPUT RATED CURRENT	10A	15A	4A	0.7A
OUTPUT CURRENT RANGE	3-15A	0-20A	0.4-5A	0-1A
PEAK CURRENT	20A	20A	6A	1A
RIPPLE & NOISE (p-p)	100mV	100mV	150mV	150mV
LINE REGULATION	± 1%	± 1%	± 2%	± 1%
LOAD REGULATION	± 2%	± 2%	± 6%	± 2%
DC OUTPUT POWER	206W			
EFFICIENCY	74%			
DC VOLTAGE ADJ.	CH1,2: +10, -5%			
INPUT VOLTAGE RANGE	90-264VAC 47-63Hz; 120-370VDC			
AC CURRENT	3.5A/115V 2A/230V			
INRUSH CURRENT	COLD START 45A			
LEAKAGE CURRENT	<2mA/240VAC			
OVERLOAD PROTECTION	105%~150% RESET:AUTO RECOVERY			
OVER VOLTAGE PROTECTION	CH1:5.75~6.75V, CH2:3.8~4.4V			
OVER TEMP. PROTECTION	95° C~± 5° C (TSW1)TYPE:SHUTDOWN RESET:AUTO RECOVERY			
TEMP. COEFFICIENT	± 0.03% / ° C (0~50° C)			
SETUP, RISE, HOLD UP TIME	800ms, 50ms, 16ms			
POWER FACTOR	PF>0.95/230VAC, PF>0.98/115VAC			
OUTPUT GOOD/INPUT POWER FAIL(OPTION)	10ms/1ms			
VIBRATION	10-500Hz, 2G 10min./1cycle, PERIOD FOR 60min. EACH AXES			
WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC			
ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:500VDC / 100M Ohms			
WORKING TEMP., HUMIDITY	-10° C~+60° C (REFER TO OUTPUT DERATING CURVE), 20%~90% RH			
STORAGE TEMP., HUMIDITY	-20° C~+85° C, 10%~95% RH			
DIMENSION	(230*115*50mm) CASE:912			
WEIGHT	1.1Kgs			
SAFETY STANDARDS	MEET UL1950, TUV EN60950			
EMC STANDARDS	MEET EN55022 (CISPR22) CLASS B, EN50082,EN55024			


NOTE :

- 1.ALL PARAMETERS ARE SPECIFIED AT 230VAC INPUT, RATED LOAD, 25° C 70% RH. AMBIENT.
- 2.TOLERANCE : INCLUDE SET UP TOLERANCE, LINE REGULATION, LOAD REGULATION.
- 3.PEAK CURRENT CAN NOT EXCEED 30 SEC.
- 4.RIPPLE & NOISE ARE MEASURED AT 20MHz BY USING A 12" TWISTED PAIR TERMINATED WITH A 0.1uF & 47uF CAPACITOR.
- 5.LINE REGULATION IS MEASURED FROM LOW LINE TO HIGH LINE AT RATED LOAD.
- 6.LOAD REGULATION IS MEASURED FROM 20% TO 100% RATED LOAD, AND OTHER OUTPUT AT 60% RATED LOAD.
- 7.EACH OUTPUT PROVIDE UP TO MAXIMUM CURRENT, BUT TATAL LOAD CAN NOT EXCEED MAX. OUTPUT POWER.


BLOCK DIAGRAM

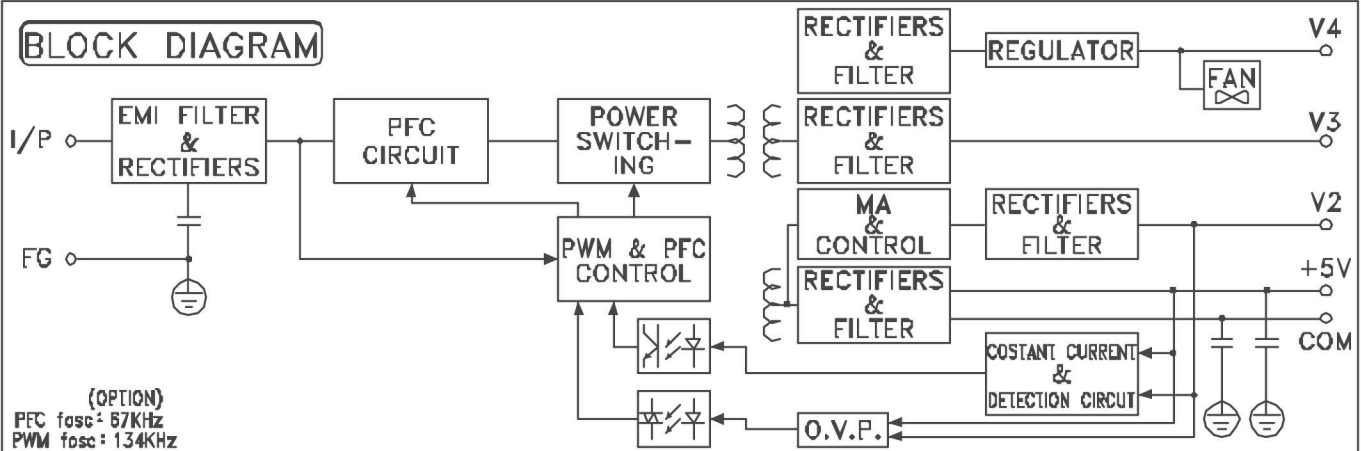

OUTPUT DERATING VS T_d

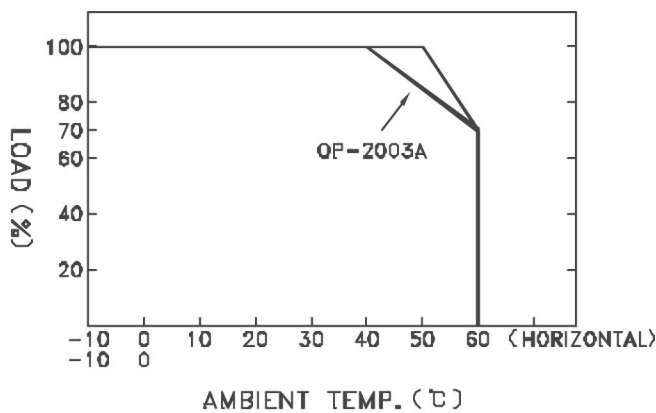

OUTPUT DERATING VS INPUT VOLTAGE

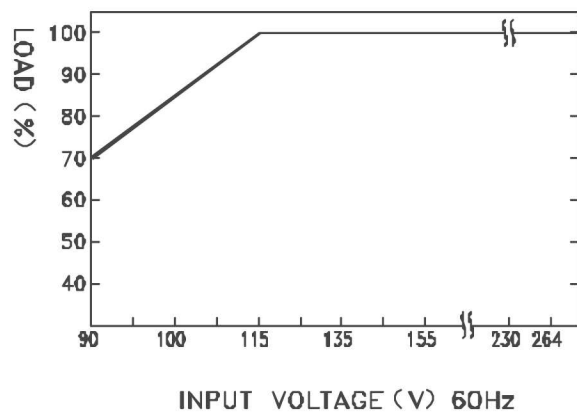

DIMENSION (mm)

☒ CASE : 912

☒ TERMINAL PIN NO. ASSIGNMENT

- ☒ PIN 1,2 : AC INPUT
- ☒ PIN 3 : FG $\perp$
- ☒ PIN 4 : DC OUTPUT V4
- ☒ PIN 5 : DC OUTPUT V3
- ☒ PIN 6 : DC OUTPUT V1
- ☒ PIN 7,8 : DC OUTPUT COM
- ☒ PIN 9 : DC OUTPUT V2

☒ TERMINAL PIN NO. ASSIGNMENT

- ☒ CN2: JST S 6B-XH-A-1
- ☒ PIN 1 : V1 (+S)
- ☒ PIN 2 : V1 (-S)
- ☒ PIN 3 : V2 (+S)
- ☒ PIN 4 : V2 (-S)
- ☒ PIN 5 : PF/PG
- ☒ PIN 6 : G

☒ MATING CONNECTORS

- ☒ CN2 MATING CONNECTOR TYPE
JST XHP SERIES OR EQUIVALENT
WITH JST SXH-001T-P0.6 OR
EQUIVALENT CRIMP TERMINALS.

