



POLYTRON DEVICES, Inc.

150 WATT Universal Input

MEDICAL

AC/DC Power Supplies



FEATURES

- **Universal Input Range**
- **Operating Temperature Range:**
-25° to +80° C (with derating)
- **Open Frame Package**
2.00" X 4.00" X 1.16"
Options: Chassis Mount
Enclosed
Din Rail
- **High Efficiency: To 92%**
- **Active Power Factor Correction**
- **4000 Vac Input/Output**
2MOPP Isolation
Class I and Class II Protection
- **Built-In EMI Class A Filter**
- **Low Leakage Current under 100µA**
- **Medical Safety Approvals**
Including: UL, CE and ANSI/AAMI
ES60601-1, EN60601-1, and
IEC60601-1 3rd Edition
- **RoHS Compliant to 2011/65/EU**

MUI150 Series

Specifications - All specifications are typical at nominal input, full load and 25° C.

INPUT

Voltage Range.....	AC Input.....	85 to 264VAC
	DC Input.....	120 to 370VDC
Input Frequency.....	AC Input.....	63Hz
Input Current.....	115VAC and Full Load.....	1.7 A
	230VAC and Full Load.....	0.8 A
No Load Input Power... ..	230VAC.....	0.3 Watts
	230VAC.....	MEF - F.....0.6 Watts
Leakage Current.....	264VAC.....	100µA
Start up time.....		1000ms
Rise time.....		20ms
Hold up time.....	115VAC and Full Load.....	16ms
Input inrush current... ..	230VAC.....	60A
Input protection.....	Internal fuse inline and neutral	T3,15A/250VAC

OUTPUT

Output Power.....	Forced air cooling with 10CFM.....	150Watts
	Natural connection for 15Vout, 24Vout, 28Vout, 36Vout.....	110Watts
	Natural connection for 12Vout, 48Vout.....	100Watts
Initial set Voltage Accuracy.....	230VAC and Full Load.....	±1.0%
Line Regulation.....	Low Line to High Line at Full Load.....	±0.2%
Load Regulation.....	No Load to Full Load.....	±0.5%
	10% Load to 90% Load.....	±0.4%
Voltage Adjustability.....		±10%
Minimum Load.....		0%
Ripple and Noise.....	Measured by 20MHz band width	
	With a 10µF/25V 1206 X7R MLCC.....	12Vout... 120mVp-p
	With a 10µF/25V 1206 X7R MLCC.....	15Vout... 150mVp-p
	With a 1µF/50V 1206 X7R MLCC.....	24Vout... 220mVp-p
	With a 1µF/50V 1206 X7R MLCC.....	28Vout... 220mVp-p
	With a 1µF/50V 1206 X7R MLCC.....	36Vout... 250mVp-p
	With a 0.1µF/100V 1206 X7R MLCC.....	48Vout... 250mVp-p
Temperature Coefficient.....		±0.2%°C
Transient Response.....	Load step from 50-75% change at 2.5A/µs... ..	Peak deviation..... 3%Vout
		Recovery time..... 500µs
Over Voltage Protection.....	% of Vout(nom); Latch mode.....	135%
Over Load Protection.....	% of Iout rated; Hiccup mode.....	150%
		12Vout, 15Vout.
Short Circuit Protection.....		Continuous, automatic recovery
Fan Power Supply.....		12V at 500mA

Additional specifications on next page.



POLYTRON DEVICES, Inc.

P.O. Box 398, Paterson, New Jersey 07544 U.S.A.

Tel: (973)345-5885 FAX: (973)345-1264 • Email: sales@polytrondevices.com • www.polytrondevices.com

GENERAL

Efficiency.....	See table
Isolation Voltage 1 minute (2MOPP insulation)...	Input to Output.....4000Vac
.....	Input (Output) to F.G. ..1500Vac
Isolation Resistance... ..500Vdc.....	0.1GΩ
Switching Frequency.	60kHz
Safety Approvals.....	ANSI/AAMI, ES60601-1, IEC6060-1, EN60601-1
.....MUIO.....	187g (6.60oz)
.....MUIT.....	235g (8.29oz)
Weight	MUI.....256g (9.03oz)
.....	MUID.....278g (9.81oz)
MTBF.. MIL-HDBK-217F Ta25°C, Full load.....	7.861 x 10 ⁵ hrs

ENVIRONMENTAL

Operating Ambient Temperature	Forced air cooling: 150W with 10CFM	with derating...-25°C to +80°C
	Natural Convection: 100 - 110W	
Storage Temperature Range.....		-40°C to +85°C
Operating Altitude.....		5000m
Thermal Shock.....		MIL-STD-810F
Shock.....		IEC68-2-27
Vibration.....		IEC68-2-6
Relative Humidity.....	Non-condensing.....	5% to 95% RH

EMC CHARACTERISTICS

EMI.....	EN55011, EN55022 and FCC Part 18.....	Conducted.....Class B
		Radiated.....Class A
Harmonic Currents.....	EN61000-3-2.....	Full Load.....Class A and D
Voltage Flicker.....	EN61000-3-3.....	
ESD.....	EN61000-4-2.....	Air ±8KV and Contact ±6KV.....Perf. Criteria A
Radiated Immunity.....	EN61000-4-3.....	20 V/m.....Perf. Criteria A
Fast Transient.....	EN61000-4-4.....	±2KV.....Perf. Criteria A
Surge.....	EN61000-4-5.....	DM ±1KV and CM ±2KV.....Perf. Criteria A
Conducted Immunity.....	EN61000-4-6.....	20Vr.m.s.Perf. Criteria A
		30%500mSPerf. Criteria A
		60%100mSPerf. Criteria A
		230Vac 50Hz>95%10mSPerf. Criteria A
		>95%5000mSPerf. Criteria B
Dip and Interruptions.....	EN60601-1-2.....	30%500mSPerf. Criteria A
		60%100mSPerf. Criteria B
		100Vac 50Hz>95%10mSPerf. Criteria A
		>95%5000mSPerf. Criteria B

All specifications are typical at 230Vac input, full load, and 25 °C unless otherwise noted.

SELECTION GUIDE						
Input Range (Vac)	Output Voltage (Vdc)	Output Current Forced air cooling with 10CFM/Optional Fan (A)	Output Current Natural Convection (A)		Efficiency (%)	Model Number*
			MUIO, MUIT	MUID, MUI		
85-264	12	12.50	8.34	10.84	91	MUI150-S12
85-264	15	10.00	7.34	9.84	92	MUI150-S15
85-264	18	8.34	6.12	7.5	92	MUI150-S18
85-264	24	6.25	4.59	5.63	92	MUI150-S28
85-264	28	5.36	3.92	4.83	92	MUI150-S36
85-264	36	4.17	3.06	3.75	92	MUI150-S48
85-264	48	3.13	2.06	2.71	92	MUI150-S48

* MUIO: Open Type
MUIT: Chassis Type
MUID: Din Rail
MUI: Enclosed (Standard)


Mechanical specifications on next page.




POLYTRON DEVICES, Inc.

P.O. Box 398, Paterson, New Jersey 07544 U.S.A.


Tel: (973)345-5885 FAX: (973)345-1264 • Email: sales@polytrondevices.com • www.polytrondevices.com

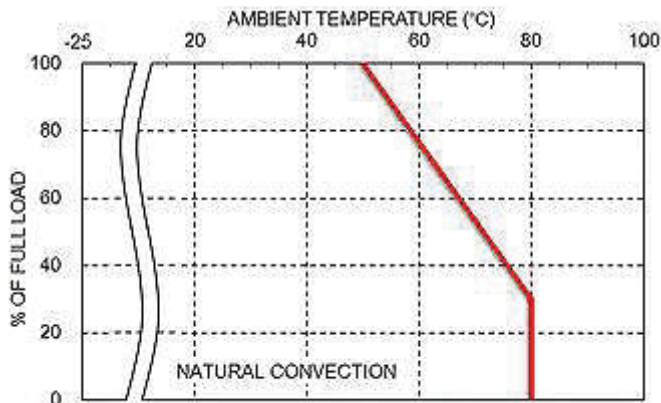


Derating Curve vs. Ambient Temperature

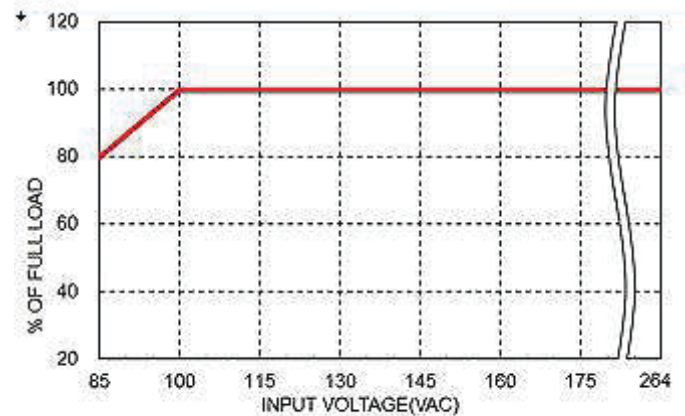

Derating Curve vs. Input Voltage

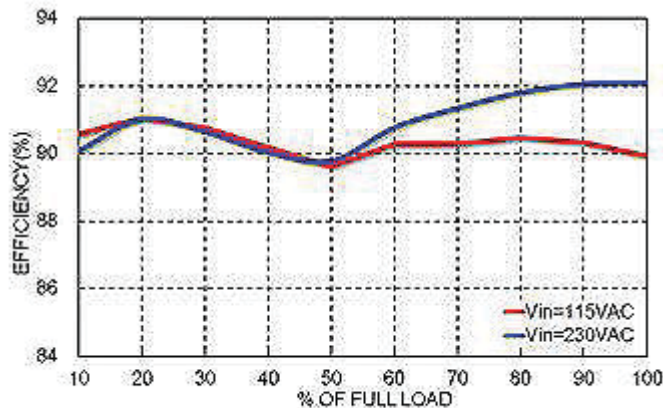


Efficiency vs. Output Load

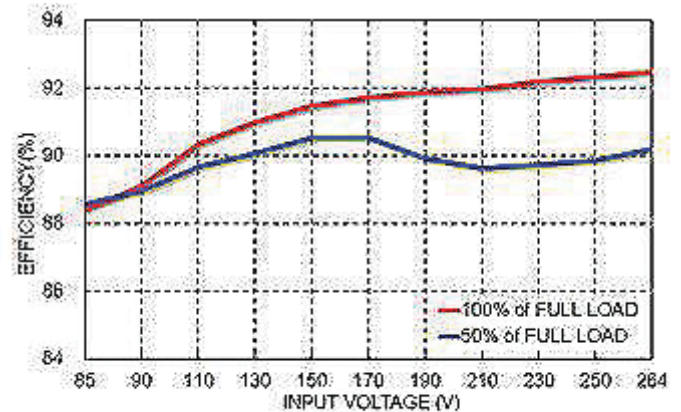

Efficiency vs. Input Voltage

MUI150 OpenType Mechanical Drawing

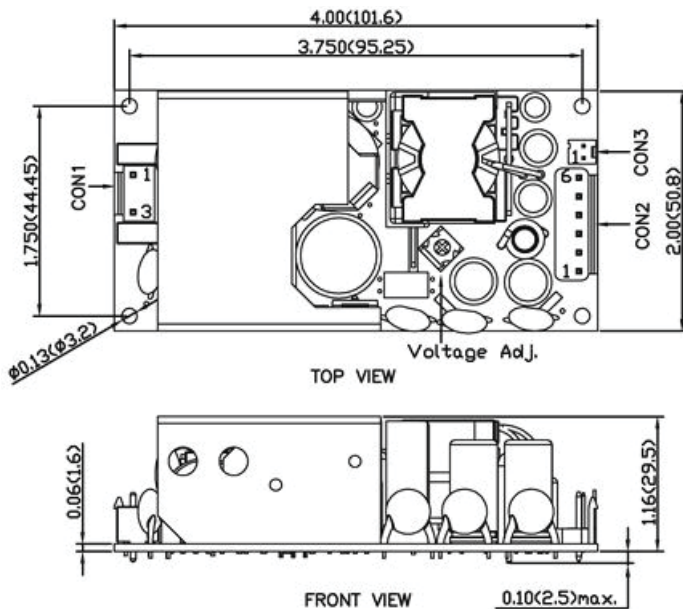

1. All dimensions in inch (mm)
2. Tolerance : $x.xx \pm 0.02$ ($x.x \pm 0.5$) $x.xxx \pm 0.01$ ($x.xx \pm 0.25$)
3. M3×0.5 screw locked torque MAX 5Kgf.cm/0.49N.m

Additional mechanical specifications on next page.

CON1 - Input Connector

PIN 1	Line
PIN 3	Neutral

Mates with

JST housing : VHR-3N

JST crimp terminals : SVH-21T-P1.1

Mounting holes marked with ⊕

must be connected to safety earth for

CLASS 1 application

CON2 - Output Connector

PIN 1, 2, 3	-Vout
PIN 4, 5, 6	+Vout

Mates with

JST housing : VHR-6N

JST crimp terminals : SVH-21T-P1.1

CON3 - Fan Connector

PIN 1	-Fan
PIN 2	+Fan

Mates with:

Molex housing: 22-01-1022

Molex crimp terminals: 2759




POLYTRON DEVICES, Inc.


P.O. Box 398, Paterson, New Jersey 07544 U.S.A.

Tel: (973)345-5885 FAX: (973)345-1264 • Email: sales@polytrondevices.com • www.polytrondevices.com

MUI150 ChassisType Mechanical Drawing

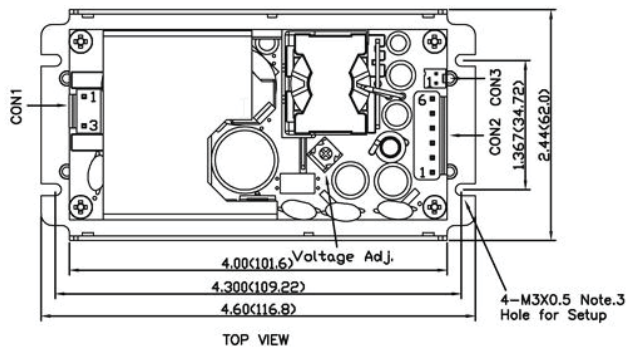


MUI150 Enclosed Type Mechanical Drawing

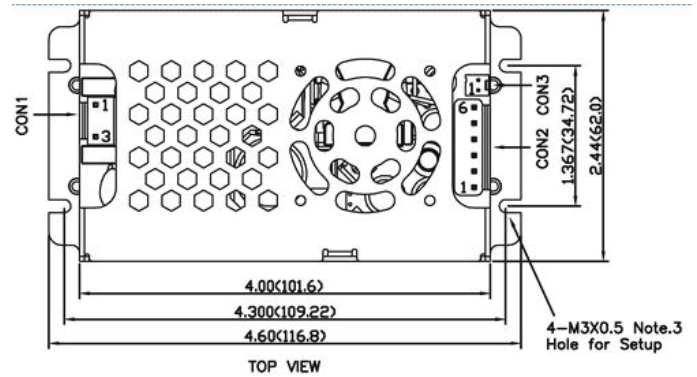


BOTTOM VIEW please refer to U chassis type

MUI150 Enclosed Type with FAN Mechanical Drawing

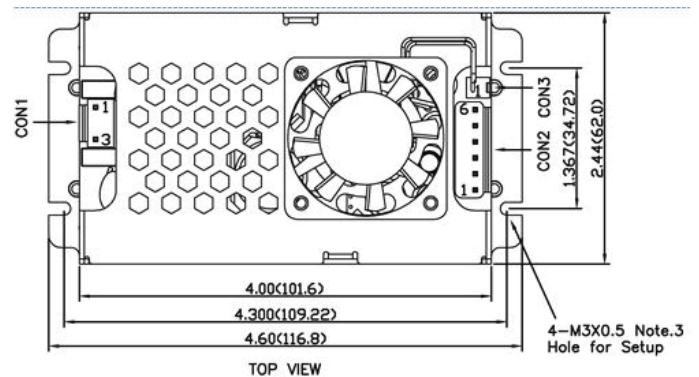

BOTTOM VIEW please refer to U chassis type

MUI150 Din Rail Type Mechanical Drawing

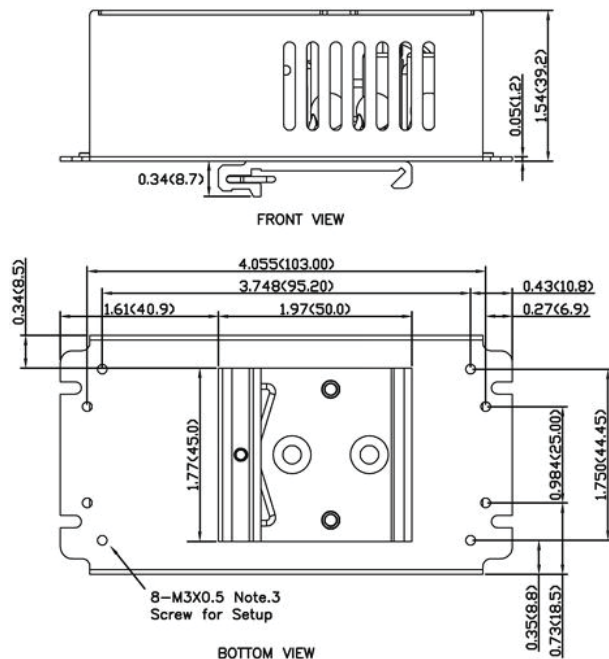

Note:

1. All dimensions in inch (mm)
2. Tolerance : x.xx±0.02 (x.x±0.5) x.xxx±0.01 (x.xx±0.25)
3. M3×0.5 screw locked torque MAX 5Kgf.cm/0.49N.m



POLYTRON DEVICES, Inc.

P.O. Box 398, Paterson, New Jersey 07544 U.S.A.

Tel: (973)345-5885 FAX: (973)345-1264 • Email: sales@polytrondevices.com • www.polytrondevices.com