



T-2
C7A(NE-2D)
C9A(NE-2J)
MIDGET
FLANGE BASE

See lamp ratings
on page L.

Neon Indicators

TWO TERMINALS—FULLY INSULATED
WITH BUILT-IN RESISTORS

FOR MOUNTING IN 15/32" CLEARANCE HOLE

MEET OR EXCEED ENVIRONMENTAL AND OPERATIONAL REQUIREMENTS
OF MIL-L-6723 AND MIL-L-3661B


When connecting a neon light to a circuit having one side grounded, always
connect the hot side of the circuit to the terminal marked + (Center Contact).

FEATURES

- **Rugged-phenolic insulated:** The socket, lamp, and all connections are well insulated from the mounting bushing by means of phenolic material of military specification grade.
- **Ultra-compact;** conserves space and weight.
- **Lens cap assembly unscrews** from front of panel for easy replacement of the lamp.
- **The shank of the lens holder is crimped in 3 evenly spaced places** to secure the lamp.
- **Anti-rotation (locked) construction.**

MATERIAL AND FINISHES

- **Mounting Bushing:** Aluminum, black anodize finish.
- **Internal-tooth Lockwasher and Mounting nut:** Steel, cadmium plated with yellow iridescent chromate finish.
- **Terminals:** Brass, hot tinned with elongated slot.



361-8836-0931-552
LH74/1; LC13RN2

361-8864-0931-522
LH74/2; LC13RN2

QPL Listed


361 SERIES

BASE PART NUMBERS

LH 74/1 361-8836-09-552
With built in 62K resistor

LH 74/2 361-8864-09-522
With built in 27K resistor

CAP PART NUMBERS



STOVEPIPE
NON-DIFFUSING

Type Part Lens Cap
Desig. Number Color


LC13RN2	137-0931	Red
LC13YN2	137-0933	Yellow (amber)
LC13WT2	137-0935	White
LC13CN2	137-0937	Clear (colorless)

COMPLETE ASSEMBLY PART NUMBERS

361-8836-0931-552
361-8836-0933-552
361-8836-0935-552
361-8836-0937-552

361-8864-0931-522
361-8864-0933-522
361-8864-0935-522
361-8864-0937-522

FRONT MOUNTING

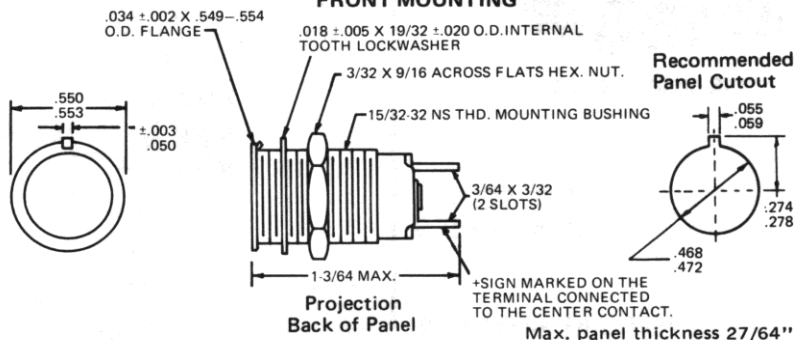

Recommended
Panel Cutout

+SIGN MARKED ON THE
TERMINAL CONNECTED
TO THE CENTER CONTACT.

Max. panel thickness 27/64"

Part numbers shown in gray are normally
in inventory at your Dialight Distributor.