
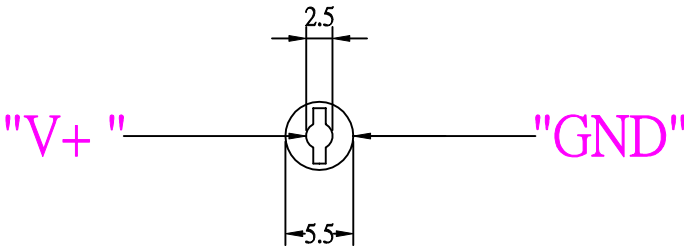



■ Features:

- ☒ CEC Efficiency Regulations Compliance(Optional)
- ☒ RoHS Compliance
- ☒ IEC320 C8 (2PIN)
- ☒ Over-Voltage Protective Installation
- ☒ Short-circuit Protective Installation
- ☒ Protection Type: Auto-Recovery
- ☒ Application: MP3,i-pod,POS,DVD...

SPECIFICATION

Model	EA1030A2	EA10302	EA1030C2	EA1030D2
Item				
Output Voltage	5V~8.5V	9V~12V	13V~20V	21V~35V
Output Rating (Max.)	25W	30W	30W	30W
Output Current (Max.)	3.5A	3A	2.3A	1.42A
Input Voltage (Limit)	AC 90~264V			
Input Frequency	47~63Hz			
Line Regulation	1% Max.			
Load Regulation	+/- 5%			
Ripple & Noise	1.2% Max.	1% Max.	1% Max.	1% Max.
Efficiency	68% Typical	70% Typical	75% Typical	80% Typical
Over Voltage Protection	Yes			
Short circuit Protection	Yes			
Operating Temperature	0~40° C			
Storage Temperature	-20° C~85° C			
Class or Class	Class			
Safety Standards	UL60950-1,EN60950-1,IEC60950-1			
Safety(1)/EMC	UL/CUL,CE,TUV,FCC,CCC			
Safety(2)/EMC	----	EK(12V)	PSE(13~15V)	----
Safety Standards	UL60065,EN60065,IEC60065			
Safety/EMC	UL/CUL,TUV	UL/CUL,TUV,FCC,PSE	UL/CUL,TUV,PSE(16~20V)	UL/CUL,TUV,PSE(16~20V)
MTBF	30,000 hours			
LED Indication	Yes			
Dimension	98L x 45W x 31H mm			
Approx. Weight	220 grams			
Standard Plug	Optional			

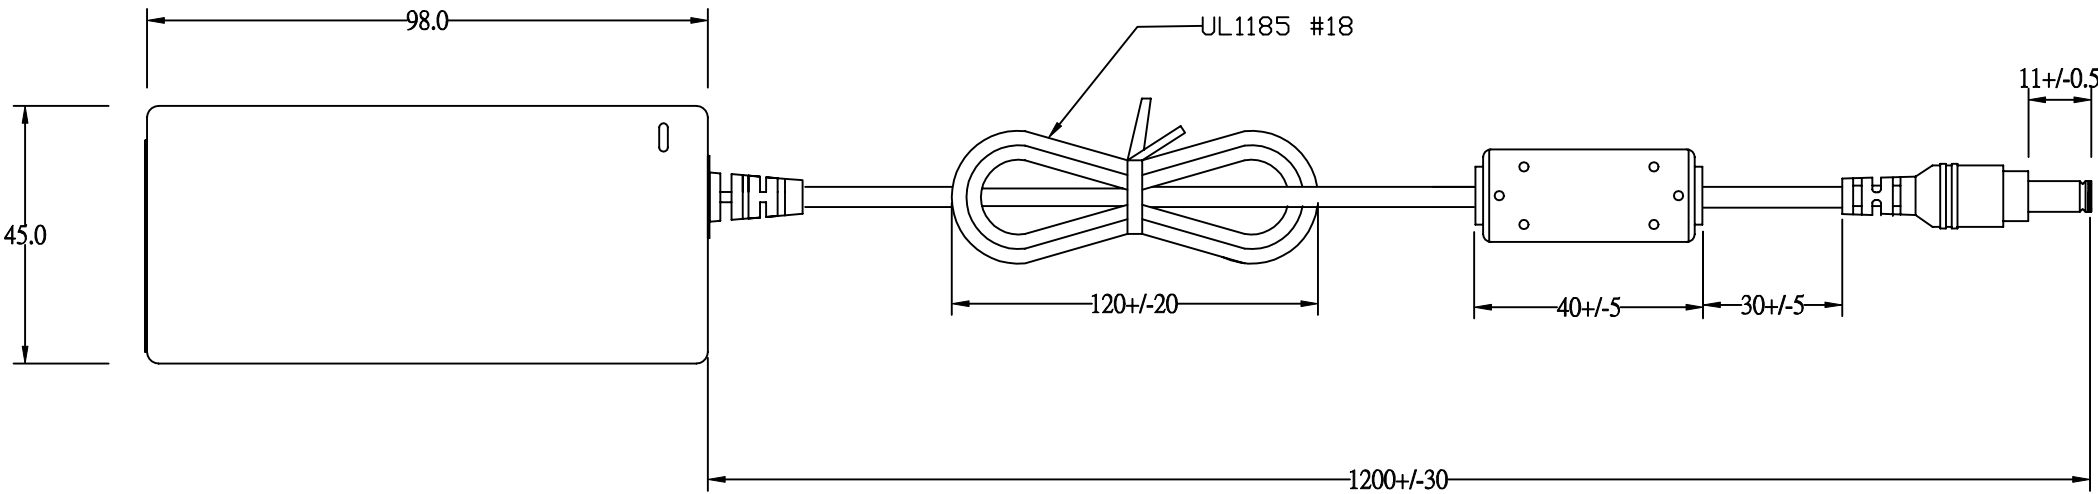

EDACPOWER ELEC.				APPROVED
MODEL	EA1020A2(06)	UNIT	mm	DESIGNED
color	BLACK	SCALE		CHECK
cus.		DATE	2006-12-20	DRAWING L.J.YU