

General description

The P2xFyW 6W family of switch mode power supplies delivers typically 6W output and features wide-range input (90-264V), small size and light weight.

The units are available in EU, UK and US housing to fit major markets, others can be toolled on request.

Typical applications are with mobile electronic equipment such as mobile phones, organizers, cameras, measuring equipment etc.

Output voltage is fixed with a tolerance of $\pm 3\%$ (1% tolerance and current regulation on request). Output voltages are available between 3V and 24V DC. Secondary cable connection to power supply is available fixed (or pluggable on request). Secondary plug is available in different forms. The power supply is for indoor use only.



| Dimensions | Length | Width | Height | |
|-------------------------|--------|-------|--------|----|
| 6W Wall Plug IN Housing | 95 | 42 | 29,5 | mm |
| Desktop Housing | 110 | 53,4 | 38 | mm |

Features

- Wide input range (90-264V)
- Output voltage fixed (3-24VDC)
- Output voltage stability $\pm 3\%$ (1% on request)
- Output power typically 6W
- High efficiency
- Protection class II
- Europe , UK, US available, others on request
- Secondary plug customer specific possible
- Manufacturing according to ISO 9001
- Compact form factor

| Input Parameter | Key | Min | Typ | Max | Unit |
|-----------------|----------------|-----|-----|-----|------|
| Input voltage | U ₁ | 90 | | 264 | V |
| Input current | I ₁ | 3 | 145 | 175 | mA |
| Input frequency | f ₁ | 47 | 50 | 63 | Hz |
| Efficiency | η | 65 | | 80 | % |
| Op. Temperature | T | -5 | | 40 | °C |


| Output Parameter | Key | Min | Typ | Max | Unit |
|--------------------------|------------------|-----|-----|------|------|
| Output Voltage | U ₂ | 3 | | 24 | V |
| Output voltage tolerance | T _{U2} | | | 3 | % |
| Output current | I ₂ | | | 1200 | mA |
| Ripple voltage | U _{RMS} | | | 50 | mV |

The power supply is available for 3 different application areas:

- Information technology equipment area
- Household device area
- Medical electrical equipment area

| Generic Product Code | |
|---------------------------|-------------------------------------|
| P 2 x F x W x | 3 ... Output stability $\pm 3\%$ |
| | S ... Information technology device |
| | H ... Household device |
| | M ... Medical electrical device |
| E ... Euro plug | |
| U ... US-, Canada plug | |
| G ... United Kingdom plug | |
| D ... Desktop Module | |

Typical output chart

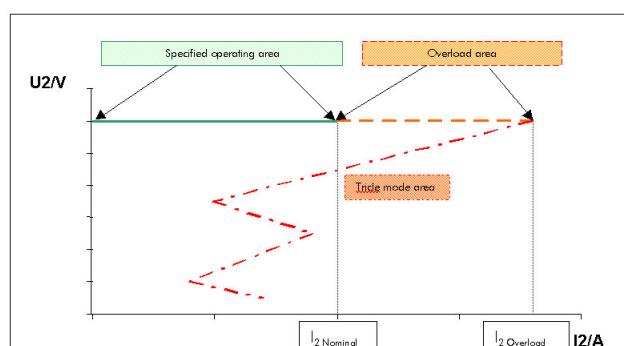

Test standards and approvals

| Test standards | |
|---|----------------------------------|
| EN 60950 UL 1310 EN 61000-6-1 EN 55022 EN 55011 EN 55014-1 EN 61204-3 | Information technology equipment |
| EN 60335 EN 61558 UL 1310 EN 61000-6-1 EN 55022 EN 55011 EN 55014-1 EN 61204-3 | Household devices |
| EN 60601-1 UL 2601 EN 60601-1-2 EN 61000-6-1 EN 55022 EN 55011 EN 55014-1 EN 61204-3 | Medical electrical equipment |

| Approvals | | | |
|-----------|--|--|--|
| Housing | Information technology equipment | Household devices | Medical electrical equipment |
| EU, UK: |    |   |   |
| US: |    |    |   |
| Desktop |     |     |     |