

# Technical Data Sheet

## Opto Interrupter

---


### ITR8103

#### ■ Features

- Fast response time
- High analytic
- High sensitivity
- Pb free
- This product itself will remain within RoHS compliant version

#### ■ Descriptions

The **ITR8103** consist of an infrared emitting diode and an NPN silicon phototransistor, encased side-by-side on converging optical axis in a black thermoplastic housing The phototransistor receives radiation from the IR only .This is the normal situation. But when an object is in between , phototransistor could not receives the radiation.




#### ■ Applications

- Mouse Copier
- Switch Scanner
- Floppy disk driver
- Non-contact Switching
- For Direct Board

#### ■ Device Selection Guide

| Device No. | Chip Material | LENS COLOR  |
|------------|---------------|-------------|
| IR908-7C   | GaAlAs        | Water Clear |
| PT908-7C   | Silicon       | Water Clear |

## Package Dimensions

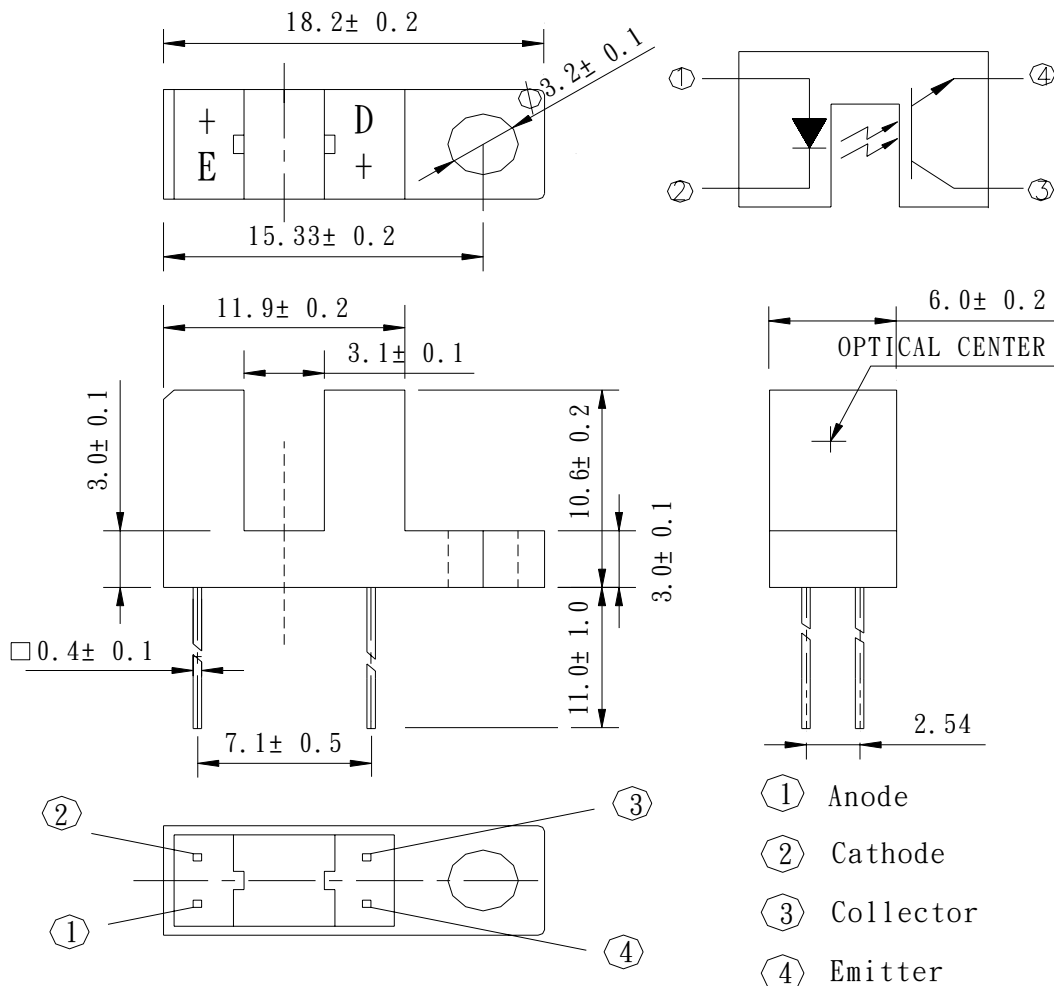

### Notes:

1. All dimensions are in millimeters
2. Tolerances unless dimensions  $\pm 0.2$  mm
3. Lead spacing is measured where the lead emerge from the package
4. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification
5. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent
6. When using this product, please observe the absolute maximum ratings and the instructions for use outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.

**Absolute Maximum Ratings (Ta=25°C)**

| Parameter                                                              |                                                                  | Symbol             | Ratings | Unit |
|------------------------------------------------------------------------|------------------------------------------------------------------|--------------------|---------|------|
| Input                                                                  | Power Dissipation at(or below) 25°C Free Air Temperature         | Pd                 | 75      | mW   |
|                                                                        | Reverse Voltage                                                  | V <sub>R</sub>     | 5       | V    |
|                                                                        | Forward Current                                                  | I <sub>F</sub>     | 50      | mA   |
|                                                                        | Peak Forward Current (*1)<br>Pulse width ≤ 100 μs, Duty cycle=1% | I <sub>FP</sub>    | 1       | A    |
| Output                                                                 | Collector Power Dissipation                                      | P <sub>C</sub>     | 75      | mW   |
|                                                                        | Collector Current                                                | I <sub>C</sub>     | 0       | mA   |
|                                                                        | Collector-Emitter Voltage                                        | B V <sub>CEO</sub> | 30      | V    |
|                                                                        | Emitter-Collector Voltage                                        | B V <sub>ECO</sub> | 5       | V    |
| Operating Temperature                                                  |                                                                  | T <sub>opr</sub>   | -25~+85 | °C   |
| Storage Temperature                                                    |                                                                  | T <sub>stg</sub>   | -40~+85 | °C   |
| Lead Soldering Temperature (*2)<br>(1/16 inch form body for 5 seconds) |                                                                  | T <sub>sol</sub>   | 260     | °C   |

(\*1)  $t_w=100 \mu \text{sec.}$ ,  $T=10 \text{msec.}$  (\*2)  $t=5 \text{Sec}$

**Electro-Optical Characteristics (Ta=25°C)**

| Parameter                |                        | Symbol               | Min. | Typ. | Max. | Unit | Conditions                                                        |
|--------------------------|------------------------|----------------------|------|------|------|------|-------------------------------------------------------------------|
| Input                    | Forward Voltage        | V <sub>F</sub>       | ---  | 1.2  | 1.5  | V    | I <sub>F</sub> =20mA                                              |
|                          | Reverse Current        | I <sub>R</sub>       | ---  | ---  | 10   | μA   | V <sub>R</sub> =5V                                                |
|                          | Peak Wavelength        | λ <sub>p</sub>       | ---  | 940  | ---  | nm   | I <sub>F</sub> =20mA                                              |
|                          | View Angle             | 2θ <sub>1/2</sub>    | ---  | 60   | ---  | Deg  | I <sub>F</sub> =20mA                                              |
| Output                   | Dark Current           | I <sub>CEO</sub>     | ---  | ---  | 100  | nA   | V <sub>CE</sub> =20V, Ee=0mW/cm <sup>2</sup>                      |
|                          | C-E Saturation Voltage | V <sub>CE(sat)</sub> | ---  | ---  | 0.4  | V    | I <sub>C</sub> =2mA<br>Ee=1mW/cm <sup>2</sup>                     |
| Transfer Characteristics | Collect Current        | I <sub>C(ON)</sub>   | 0.9  | ---  | 15   | mA   | V <sub>CE</sub> =5V I <sub>F</sub> =20mA                          |
|                          | Rise time              | t <sub>r</sub>       | ---  | 15   | ---  | μsec | V <sub>CE</sub> =5V<br>I <sub>C</sub> =1mA<br>R <sub>L</sub> =1KΩ |
|                          | Fall time              | t <sub>f</sub>       | ---  | 15   | ---  | μsec |                                                                   |

# Typical Electrical/Optical/Characteristics Curves for IR

Fig. 1 Forward Current vs. Ambient Temperature

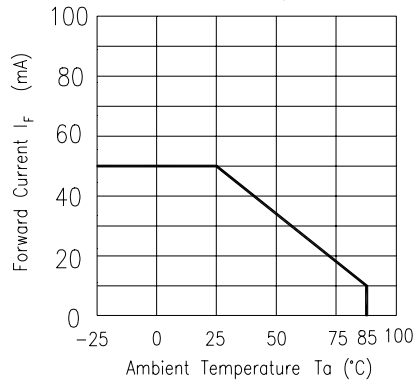


Fig. 2 Spectral Distribution

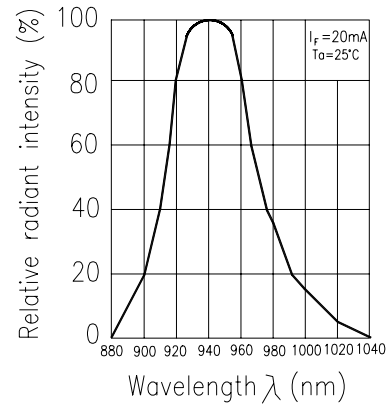


Fig. 3 Peak Emission Wavelength vs. Ambient Temperature

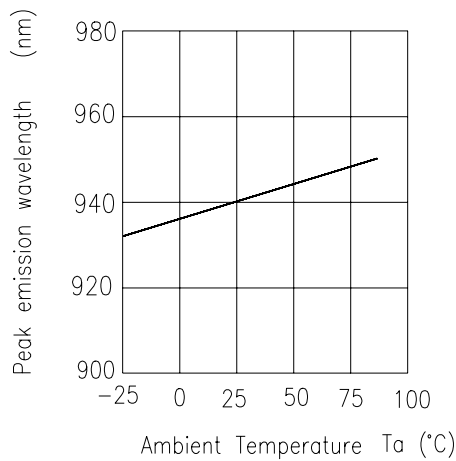


Fig. 4 Forward Current vs. Forward Voltage

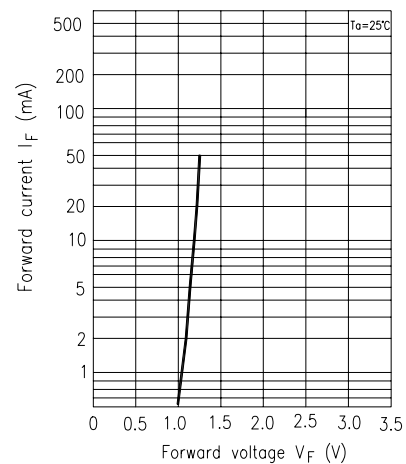


Fig. 5 Forward Voltage vs. Ambient Temperature



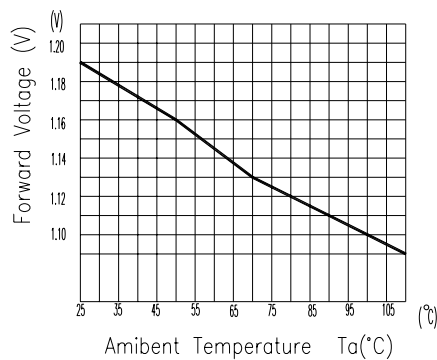


Fig. 6 Relative Radiant Intensity vs. Angular Displacement

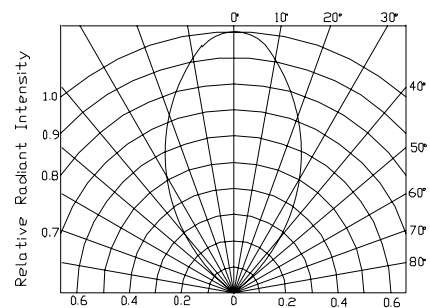


# Typical Electrical/Optical/Characteristics Curves for PT

Fig.1 Collector Power Dissipation vs. Ambient Temperature

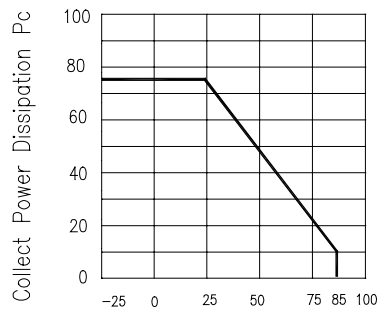


Ambient Temperature  $T_a$  (°C)

Fig. 3 Relative Collector Current vs. Ambient Temperature

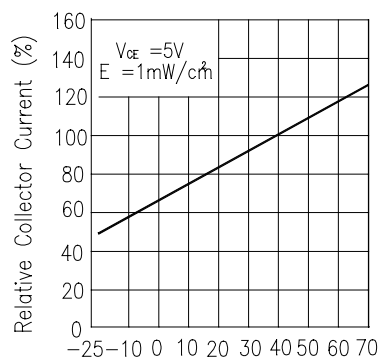


Ambient Temperature  $T_a$  (°C)

Fig.5 Spectral Sensitivity

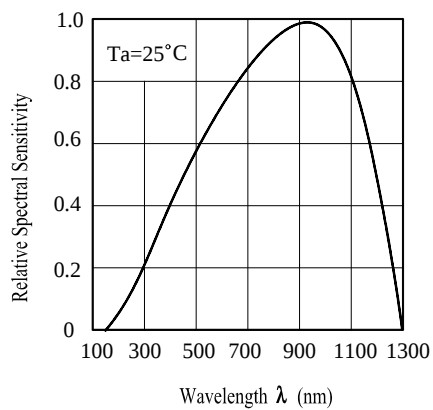

Wavelength  $\lambda$  (nm)

Fig.2 Collector Dark Current vs. Ambient Temperature

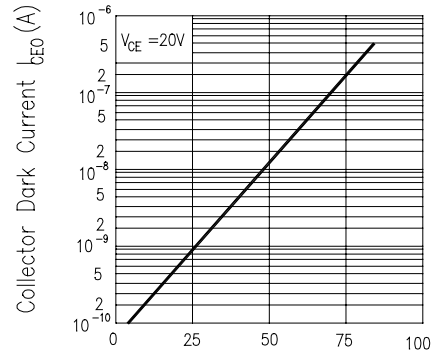

Ambient Temperature  $T_a$  (°C)

Fig.4 Collector Current vs. Irradiance


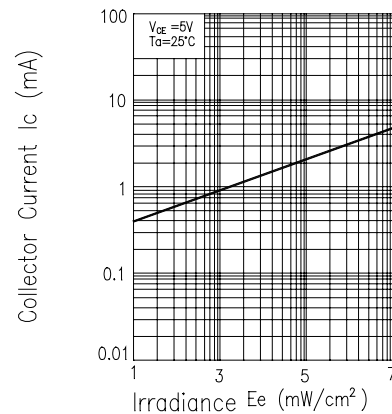


Fig.6 Collector Current vs. Collector-Emitter Voltage

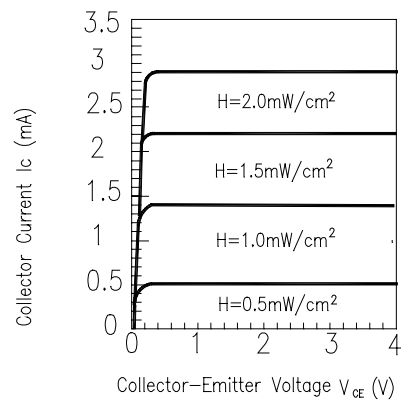

Collector-Emitter Voltage  $V_{ce}$  (V)

### Reliability Test Item And Condition

The reliability of products shall be satisfied with items listed below.

Confidence level : 90%

LTPD : 10%

| NO. | Item                             | Test Condition                                                          | Test Hours/<br>Cycle | Sample Size | Failure Judgement Criteria                                                                                                                      | Ac/Re |
|-----|----------------------------------|-------------------------------------------------------------------------|----------------------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------|-------|
| 1   | Solder Heat                      | TEMP : 260°C ± 5 °C                                                     | 10sec                | 22 pcs      | $I_R \geq U \times 2$<br>$E_e \leq L \times 0.8$<br>$V_F \geq U \times 1.2$<br><br>U :Upper specification limit<br>L :Lower specification limit | 0/1   |
| 2   | Temperature Cycle                | H : +100°C    15 mins<br>$\updownarrow$<br>5 min<br>L : -40°C    15 min | 300 cycle            | 22 pcs      |                                                                                                                                                 | 0/1   |
| 3   | Thermal Shock                    | H : +100°C    5 min<br>$\updownarrow$<br>10 sec<br>L : -10°C    5 min   | 300 cycle            | 22 pcs      |                                                                                                                                                 | 0/1   |
| 4   | High Temperature Storage         | TEMP. : +100°C                                                          | 1000 hrs             | 22 pcs      |                                                                                                                                                 | 0/1   |
| 5   | Low Temperature Storage          | TEMP. : -40°C                                                           | 1000 hrs             | 22 pcs      |                                                                                                                                                 | 0/1   |
| 6   | DC Operating Life                | $V_{CE}=5V$<br>$I_F=20mA$                                               | 1000 hrs             | 22 pcs      |                                                                                                                                                 | 0/1   |
| 7   | High Temperature / High Humidity | 85°C / 85% R.H.                                                         | 1000 hrs             | 22 pcs      |                                                                                                                                                 | 0/1   |



**ITR8103**

## Packing Quantity Specification

1. 27Pcs/Tube,100Tube/Box,4Box/Catch

## Label Form Specification



CPN: Customer's Production Number  
P/N : Production Number  
QTY: Packing Quantity  
CAT: Ranks  
HUE: Peak Wavelength  
REF: Reference  
LOT No: Lot Number

## Notes

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
3. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.

**EVERLIGHT ELECTRONICS CO., LTD.**  
Office: No 25, Lane 76, Sec 3, Chung Yang Rd,  
Tucheng, Taipei 236, Taiwan, R.O.C

Tel: 886-2-2267-2000, 2267-9936  
Fax: 886-2267-6244, 2267-6189, 2267-6306  
<http://www.everlight.com>