

Stand: 43/07

Wide input range
Case style: DIP24

INDUSTRIAL DC/DC Converters

Step down

7 Watt

Series:
CSXX-40/YY
CSXX-60/YY

Electrical specifications:

Ambient temperature:	-40°C to +71°C
Operating temperature:	max. +105°C
Input voltage:	wide input range
Output voltage accuracy:	+/- 3%
Output Ripple & Noise:	typ. 200mVp-p


Short circuit protection:	limited, 1 minute
Overload protection & thermal	shut down
Insulation voltage:	none
Case material:	black polycarbonate
Optional:	Part-Nr. /3 metalcase
	Part-Nr. /SD shut-down pin

CAUTION: NO INPUT POLARITY CHANGE ALLOWED!

Part-No. Single	Input Voltage DC	Input Current	Output Voltage DC	Output Current	Eff. %
CS10-40/01,8	10 - 40V 10 - 60V	6mA	1,8V	2800mA	72
CS10-40/02,5		6mA	2,5V	2800mA	72
CS10-40/03,3		6mA	3,3V	2121mA	73
CS10-40/05		6mA	5V	1400mA	76
CS10-40/05,2		6mA	5,2V	1346mA	77
CS10-60/01,8		6mA	1,8V	2800mA	72
CS10-60/02,5		6mA	2,5V	2800mA	72
CS10-60/03,3		6mA	3,3V	2121mA	73
CS10-60/05		6mA	5V	1400mA	76
CS10-60/05,2		6mA	5,2V	1346mA	77
Initial start-up at 8V					
CS10-40/08	10 - 40V	6mA	8V	875mA	84
CS10-60/08	10 - 60V	6mA	8V	875mA	84
CS12-40/12	14 - 40V	6mA	12V	580mA	83
CS12-60/12	14 - 60V	6mA	12V	580mA	83
CS15-40/15	17 - 40V	6mA	15V	465mA	83
CS15-60/15	17 - 60V	6mA	15V	465mA	83
CS24-40/24	26 - 40V	6mA	24V	290mA	83
CS24-60/24	26 - 60V	6mA	24V	290mA	83

Any other output voltages available


**Input current measured at no load
over full input voltage range**

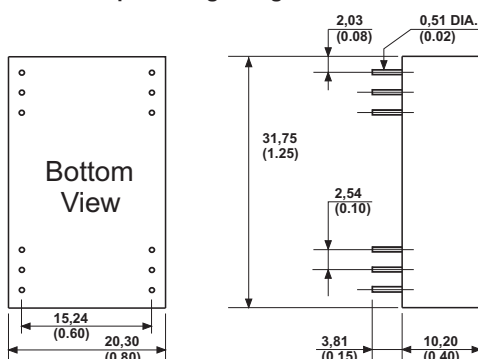


Part-Nr. /SD with shut down pin
SD = Shut down

*** Shut down voltage 2V - 5.25V (1.4mA at 5V)***

Standard



Single Part-Nr. /2

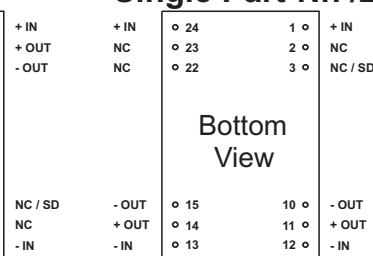

ALL DIMENSIONS IN MM (INCHES)
MILLIMETERS +/- 0,25mm
(INCHES +/- 0,01")
All pins on a 2,54mm pitch
NP = No Pin; NC = No Connection

**Input capacitor 220μF min. &
output capacitor 470μF min. necessary**

**Specification may be changed without notice
please contact office for verification**

**We can offer EMC - Filter
according to EN55011/22 Class B.**