

DESCRIPTION

This product is an 220 watts AC to DC power supply intended for use in AIO systems, PC systems, Mini-ITX systems, embedded systems and printers that have a high wattage demands. This adapter operates at 90 to 264 VAC input voltage. The unit meets EN55022, EN55024 and FCC class B emission limits, and is designed for ITE application.

APPLICATION

AIO, PC systems, mini-ITX systems, embedded systems, printers

FEATURES

- Meet Energy Star EPS2.0/ErP lot 7
- Meet DOE Level V
- High Reliability
- EMC Standard: EN55022 CLASS B / EN55024 CLASS B
- Over Current Protection
- Over Temperature Protection
- Over Voltage Protection
- With PFC Circuit

WATTAGE

Wattage: 120W

PRODUCT HIGHLIGHT

V-Output: 19V
O/P Current: 6.32A
Socket Type: C6

INPUT ELECTRICAL

Input Voltage: 90 ~ 264 V
Input Frequency: 47 ~ 63 Hz

OUTPUT ELECTRICAL

Single Output: 19 V/ 6.32 A

MECHANICAL SPECIFICATION



SAFETY STANDARD APPAOVAL



NO LOAD AND EFFICIENCY

No Load: 0.5 Watts
Efficiency: ≥87 %
DOE Level : V

PROTECTION


Protection: OCP,OVP, OTP

ENVIRONMENTAL REQUIREMENTS

TEMP. Range: Storage : -20 to + 80 °
Humidity: Operating: 80% RH, Non-condensing
 Storage: 90% RH, Non-condensing
Altitude : 2000 M
MTBF: 200,000 hours at typical load at 25° ambient base on SR332

MECHANICAL

Dimension: 167mm(L) x 65mm(W) x 37mm(H)
LED Indicator: No
On/ Off Switch: No

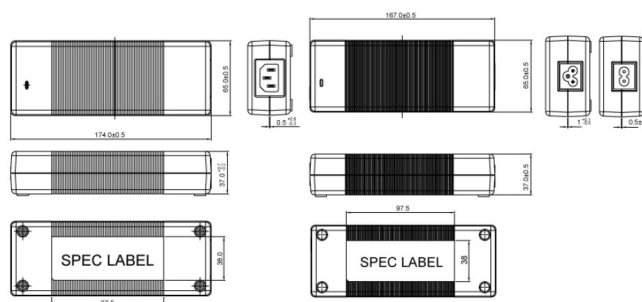

This content is subject to change, please refer to specification for more detail.
 FSP reserve the right to change the content without prior notice