



## 0.5T8E\_1U Series

0.5W - Single Output DC-DC Converter - Fixed Input - Isolated & Unregulated

- ⊕ Small footprint
- ⊕ Miniature SMD package style
- ⊕ High efficiency up to 78%
- ⊕ 1000VDC isolation
- ⊕ Temperature range:  
-40°C ~ +85°C

- ⊕ Industry standard pinout
- ⊕ Low temperature rise
- ⊕ Internal SMD construction
- ⊕ No external component required
- ⊕ RoHS compliance



### Common specifications

Short circuit protection:	1 second
Temperature rise at full load:	25°C TYP (Ta = 25°C)
Cooling:	Free air convection
Operation temperature range:	-40°C ~ +85°C
Storage temperature range:	-40°C ~ +100°C
Lead temperature	300°C MAX, 1.5mm from case for 10 sec
Storage humidity range:	< 95%
Package material:	Epoxy Resin [UL94-VO]
MTBF (MIL-HDBK-217F@25°C):	>3,500,000 hours
Weight:	1g
Dimensions:	12.7*7.6*6.25mm

### Input specifications

Item	Test condition	Min	Typ	Max	Units
Voltage tolerance			±10		%
Filter	Capacitor				

### Isolation specifications

Item	Test condition	Min	Typ	Max	Units
Isolation voltage		1000			VDC
Isolation resistance	Test at 500VDC	1000			MΩ

## DC-DC Converter

0.5 Watt

The 0.5T8E\_1U series is specially designed for applications where a group of polar power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.

These products apply to:

- 1) Where the voltage of the input power supply is fixed (voltage variation  $\leq \pm 10\%$ )
- 2) Where isolation is necessary between input and output (isolation voltage  $\leq 1000\text{VDC}$ )
- 3) Where the regulation of the output voltage and the output ripple noise are not demanding

Such as: digit circuit condition; normal low-frequency artificial circuit condition; relay drive circuit condition, etc.

### Output specifications

Item	Test condition	Min	Typ	Max	Units
Output voltage accuracy			±5		%
Line regulation	For Vin change of 1%		1.2		%
Load regulation	10% to 100% load • 3.3V • 5V • 9V • 12V • 15V		15		%
Transient response setting time	50% load step change		350		μs
Temperature drift	100% full load		±0.03		%/°C
Ripple & Noise*	20MHz Bandwidth		100		mVp-p
Switching frequency	Full load, nominal input		100		KHz

\* Ripple and noise tested with "parallel cable" method. See detailed operation instructions at DC-DC Application Notes.

### Example:

0.5T8E\_0505S1U  
0.5 = 0.5Watt; T8 = SMT8; E = Series; 05 = 5Vin; 05 = 5Vout;  
S = Single output; 1 = 1kVDC; U = Unregulated output

### Note:

1. Operation under minimum load will not damage the converter; However, they may not meet all specification listed.
2. Max. Capacitive Load tested at input voltage range and full load.
3. All specifications measured at Ta = 25°C, humidity < 75%, nominal input voltage and rated output load unless otherwise specified.
4. In this datasheet, all the test methods of indications are based on our corporate standards.


## 0.5T8E\_1U Series

0.5W - Single Output DC-DC Converter - Fixed Input - Isolated & Unregulated


Part Number	Input Voltage [V]	Output Voltage [VDC]	Output Current [mA]	Efficiency [% typ]
0.5T8E_0303S1U	3.3	3.3	150	65
0.5T8E_0305S1U	3.3	5	100	70
0.5T8E_0309S1U	3.3	9	56	70
0.5T8E_0312S1U	3.3	12	42	70
0.5T8E_0315S1U	3.3	15	33	70
0.5T8E_0503S1U	5	3.3	150	68
0.5T8E_0505S1U	5	5	100	70
0.5T8E_0509S1U	5	9	56	72
0.5T8E_0512S1U	5	12	42	72
0.5T8E_0515S1U	5	15	33	72
0.5T8E_0903S1U	9	3.3	150	70
0.5T8E_0905S1U	9	5	100	72
0.5T8E_0909S1U	9	9	56	72
0.5T8E_0912S1U	9	12	42	72
0.5T8E_0915S1U	9	15	33	72
0.5T8E_1203S1U	12	3.3	150	70
0.5T8E_1205S1U	12	5	100	70
0.5T8E_1209S1U	12	9	56	72
0.5T8E_1212S1U	12	12	42	72
0.5T8E_1215S1U	12	15	33	72
0.5T8E_1503S1U	15	3.3	150	70
0.5T8E_1505S1U	15	5	100	73
0.5T8E_1509S1U	15	9	56	75
0.5T8E_1512S1U	15	12	42	76
0.5T8E_1515S1U	15	15	33	78

## Typical characteristics

Temperature derating graph

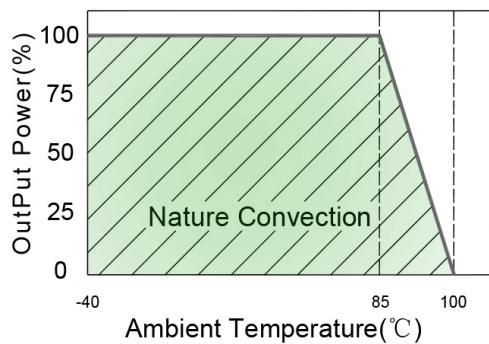


Tolerance envelope graph

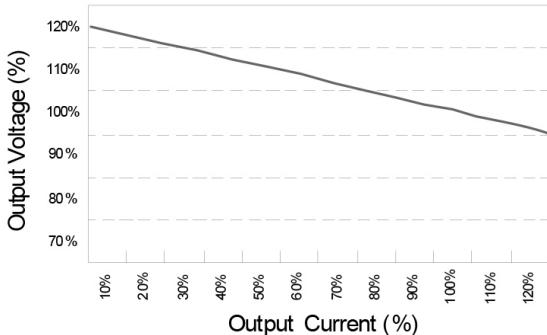

## 0.5T8E\_1U Series

0.5W - Single Output DC-DC Converter - Fixed Input - Isolated & Unregulated



### Recommended test circuit

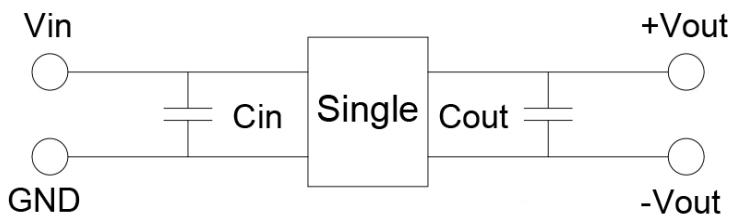

3.3V:  $C_{in}$  4.7uF, 25V  
5V:  $C_{in}$  4.7uF, 25V  
9V:  $C_{in}$  4.7uF, 25V  
12V:  $C_{in}$  2.2uF, 25V  
15V:  $C_{in}$  1uF, 50V



3.3V:  $C_{out}$  22uF, 16V  
5V:  $C_{out}$  10uF, 25V  
9V:  $C_{out}$  4.7uF, 25V  
12V:  $C_{out}$  2.2uF, 25V  
15V:  $C_{out}$  1uF, 50V

### Mechanical dimensions

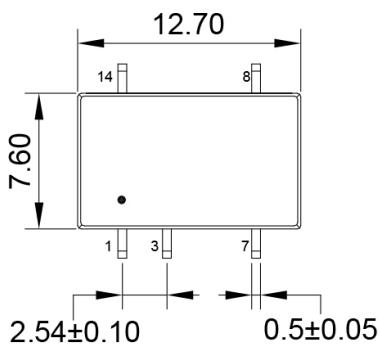

PIN	Single
1	-Vin
3	+Vin
7	-Vout
8	+Vout
14	NC

SUGGESTED PAD LAYOUT

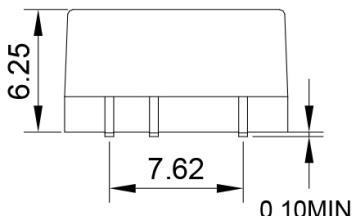

Note:  
Unit: mm[inch]  
General tolerances:  $\pm 0.25mm$  [ $\pm 0.010$ inch]