

Model:GTM21096-WWVV-F

July 31, 2021

GTM21096-WWVV-F

Information

Model Number	GTM21096-WWVV-F
Description	GTM21096-WWVV-F, Medical Power Supply, Open Frame/Internal, Regulated Switchmode AC-DC Power Supply AC Adaptor, , Input Rating: 100-240V~, 50-60 Hz, Molex 09-65-2058 5 Position Header Pin 1: Earth, Pin 2: Removed, PIN 3: Neutral, Pin 4: removed, Pin 5: Line, Output Rating: 19 Watts, Power rating with convection cooling (W) , 3.3-24V in 0.1V increments, Approvals: EAC; UKCA; CB 62368 (pending); CB 60601-1; CE; China RoHS; RoHS; SIQ; Ukraine; VCCI; WEEE; cRUus; Class I;
Model Picture	
Agency Documents	http://www.globtek.info/certs/GTM21096/
CE EC-Declaration	https://www.globtek.com/pdf/ec_declaration/a0O30000007P7Z8EAK
RoHS/RoHS2 Declaration	https://www.globtek.com/pdf/rohs_cert/a0O30000007P7Z8EAK
REACH Declaration	https://www.globtek.com/pdf/iso_certificates/REACH.pdf
Conflict Minerals Declaration	https://www.globtek.com/pdf/conflict-minerals.pdf

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM21096-WWVV-F

July 31, 2021

MODEL PARAMETERS

Type	Open Frame/Internal
Technology	Regulated Switchmode AC-DC Power Supply AC Adaptor
Category	Medical Power Supply
Input Voltage	100-240V~, 50-60 Hz
I/P Amps (A)	0.5A Max
Wattage (W)	19.0
Vout Range (V)	3.3-24
Efficiency Level	N/A
Ingress Protection	
Size (mm)	

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.


<https://en.globtek.com/datasheet/id/a0030000007P7Z8>

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM21096-WWVV-F

July 31, 2021

ENCLOSURE

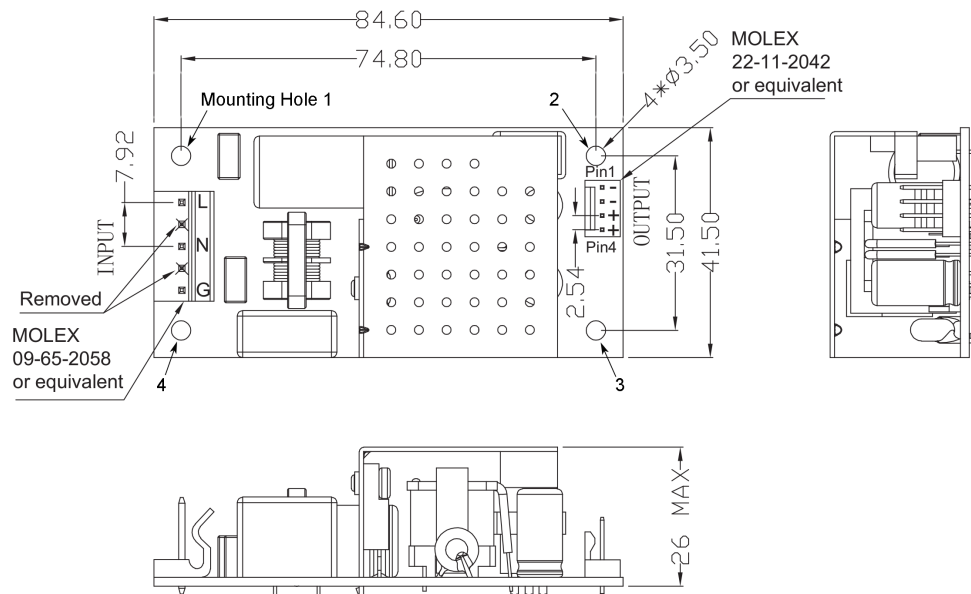

IMPORTANT INSTALLATION NOTES:

FOR PROPER INSULATION AND GROUNDING RELIABILITY, FOLLOW EITHER OPTIONS BELOW

OPTION 1: USE NYLON 4-40 SCREWS AND NYLON STAND-OFF FOR ALL MOUNTING HOLES AND ADD JUMPER WIRE OPTION SHOWN BELOW FOR EARTH CONNECTION BETWEEN MOUNTING HOLES 4 AND 3.



RING TERMINAL, AMP P/N: 8-34142-5 AWG 18 STRANDED WIRE,
GREEN, 100 mm LENGTH

OPTION 2. USE METALLIC 4-40 SCREWS AND METALLIC STAND-OFF FOR HOLES 3 AND 4 AND USE NYLON 4-40 SCREWS AND NYLON STAND-OFF FOR HOLES 1 AND 2.

OPTION 2 IS ONLY APPLICABLE IF SYSTEM CHASSIS WHERE THE POWER SUPPLY IS MOUNTED IS MADE OUT OF METAL.

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM21096-WWVV-F

July 31, 2021

RATING TABLE

Model Number	Voltage	Amps(A)	Watts(W)	RFQ
GTM21096-1003-F	3.3 V	2.6	8.58	RFQ
GTM21096-1003-FW	3.3 V	2.6	8.58	RFQ
GTM21096-1505-F	5 V	2.6	13.00	RFQ
GTM21096-1505-FW	5 V	2.6	13.00	RFQ
GTM21096-1506-F	6 V	2.5	15.00	RFQ
GTM21096-1506-FW	6 V	2.5	15.00	RFQ
GTM21096-1509-F	9 V	1.7	15.30	RFQ
GTM21096-1509-FW	9 V	1.7	15.30	RFQ
GTM21096-1512-F	12 V	1.25	15.00	RFQ
GTM21096-1512-FW	12 V	1.25	15.00	RFQ
GTM21096-1815-F	15 V	1.2	18.00	RFQ
GTM21096-1815-FW	15 V	1.2	18.00	RFQ
GTM21096-1818-F	18 V	1	18.00	RFQ
GTM21096-1818-FW	18 V	1	18.00	RFQ
GTM21096-1824-F	24 V	0.75	18.00	RFQ
GTM21096-1824-FW	24 V	0.75	18.00	RFQ
GTM21096-1948-F	48 V	0.4	19.20	RFQ
GTM21096-1948-FW	48 V	0.4	19.20	RFQ

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://en.globtek.com/datasheet/id/a0030000007P7Z8>

Model:GTM21096-WWVV-F

July 31, 2021

SPECIFICATIONS

A) ELECTRICAL SPECIFICATIONS:

01. Input Voltage: Specified 90-264 Vac, Nameplate rated: 100-240Vac
02. Input Frequency: Specified 47-63 Hz, Nameplate rated 50-60Hz
03. Output Regulation: +/- 5% measured at the output connector
04. Line Voltage Regulation: +/- 1% typical measured at full load
05. Output Ripple (Vp-p): +/- 1% of output voltage, Vp-p, typical
06. Turn-ON/OFF: 5% maximum, 1 mS typical recovery time for 25% step load
07. Turn-ON Delay: 1 Sec, typical
08. Hold-Up Time: 8 mS typical @ nominal input voltage and full load
09. Inrush Current: 30A maximum cold start @ 115 Vac input, 60A maximum cold start @ 230 Vac input
10. Switching Frequency: 100 KHz typical, varies with line and load
11. Efficiency: 75% typical at nominal input and full load

B) PROTECTION

01. Over-Voltage: limited via crowbar method
02. Short Circuit/Over-load: momentary short circuit protected, output will autorecover upon removal of short
03. Input Protection: Input line

C) SAFETY

01. Dielectric Withstand Voltage: 5656 Vdc from primary to secondary
02. Earth Leakage Current: Did not exceed 5 mA in NORMAL CONDITION and 10 mA in SINGLE FAULT CONDITION
03. Touch Current: Did not exceed 100uA NC(Normal condition) 500uA SFC(single fault condition)
04. Earth continuity test:<0.1 Ohm or < 0.2 Ohm when with a non-detachable Power Supply cord, Class I Only
05. Type of protection against electric shock: class I
06. Degree of safety of application in the presence of flammable anesthetic: not evaluated
07. Mode of operation: Continuous
08. ROHS 2: Complies with EU 2011/65/EU and China SJ/T 11363-2006

D) OTHER:

01. MTBF: 200,000 Hours @ 25°C ambient temperature
02. Operating Temperature: 0°C to 40°C ambient temperature
03. Humidity: 0% to 90% relative humidity
04. Storage Temperature: -10°C to 80°C
05. Cooling: Convection

E) ENCLOSURE

01. Housing: Open Frame
02. Size: 84.6 x 41.4 x 28.9 mm

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://en.globtek.com/datasheet/id/a0030000007P7Z8>

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTM21096-WVVV-F

July 31, 2021

DERATING CURVE

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM21096-WWVV-F



July 31, 2021

INPUT CONFIGURATION

Description Molex 09-65-2058 5 Position Header Pin 1: Earth, Pin 2: Removed, PIN 3: Neutral, Pin 4: removed, Pin 5: Line

Document: http://www.molex.com/pdm_docs/sd/009652058_sd.pdf

Catalog Page: http://www.molex.com/molex/products/datasheet.jsp?part=active/0009652058_PCB_HEADERS.xml

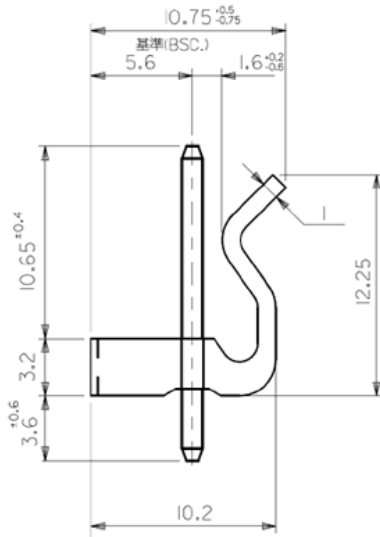

Mates With Part(s):

5195 SPOX™ Crimp Housing, **5239** KK® Crimp Housing

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM21096-WWVV-F

July 31, 2021

Approvals

Logo	Description
	Attention Mark / Refer to operating manual for operating and service instructions
No Logo Applicable	CB report IEC 60601-1: 2005 + CORR. 1 (2006) + CORR. 2 (2007) and or EN 60601-1:2006 3rd Edition
No Logo Applicable	CB for IEC 62368-1:2014 (Second Edition) (pending)
	CE Mark: tested to comply with EN 60601-1-2:2015 Medical electrical equipment Part 1-2: - Mark is on the label or Molded in the case
	CHINA SJ/T 11364-2014, China RoHS Chart: http://en.globtek.com/globtek-rohs.php
	Class I Earth Ground
	cRUus UL Recognized Component E172861 3rd Edition w-RM ANSI-AAMI ES60601-1 (2005 + C1:09 + A2:10) and CAN-CSA-C22.2 No. 60601-1 (2008)
	Certification # TC RU AR46.B.75423 Custom Union of Russia, Belarus and Kazakhstan
	Indoor Use Only - Mark is on the label or Molded in the case
RoHS	Specifications of directive 2011/65/EU Annex VI (ROHS-2) with amendment 2015/863-EU (ROHS-3) http://www.ce-mark.com/Rohs%20final.pdf
 IEC/EN60601-1	SIQ Mark License EN60601-1
	UKCA Certification

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTM21096-WWVV-F

July 31, 2021

 10276	Ukraine UKRSepro (Document: www.globtek.com/html/iso_certificates/GT_Ukraine.pdf)
	Japan: Voluntary Control Council for Interference (VCCI)
	WEEE: Complies with EU 2012/19/EU (http://ec.europa.eu/environment/waste/weee/index_en.htm) Mark is on the label or Molded in the case