

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: GT-41130-2012-T3, ITE Power Supply, Efficiency Level: V, Case Color/Style: GlobTek Black, Desktop/External, Regulated Switchmode AC-DC Power Supply AC Adaptor, Input Rating: 100-240V~, 50-60 Hz, IEC 60320/C14 , Output Rating: 24W, 12.0V@2.0A, Output Configuration: 1530 mm, 18/1C + Shield Cond, UL 1185, Female Barrel 5.5*2.1*11mm No internal Spring Clip nor Locking Notch or Equal, Ferrite: None, GlobTek Black, GT Cord # C0134, Pin Out: Center Positive (+V), Blades/Input Cord: (Order Separately), Approvals: EAC; Korea (15V, 16V, 24V); PSE; WEEE; CE; NRCAN; China RoHS; Class I; Level V; NEMKO 60950; FCC; CCC; Ukraine; RoHS; VCCI; RCM; IP40; UL/cUL; LPS 60950; South Africa; Malaysia; IRAM; HKSM; NOM (24V only); CB 60950;
	Model No. GT-41130-2012-T3
	Part No./Ordering No. TR9CE2000CCP-N(RVB)
	Rev D1

REVISION HISTORY

REV	DESCRIPTION	SUB	DATE	APPROVED
D1	Update CCC, Ukraine, add EAC approvals, delete approval Saudi Arabia, Serbia, Brazil, GOST	QA	03/20/2020	QA
D	Update approvals: remove NOM, update Ukraine mark, change PSE from CQC to TUV	jsund	03/27/2017	QA
C	update to new format, change circle 10 to 30, added HK, IRAM, NOM, RCM, Saudi Arabia, Serbia, Brazil approval	GTde1	09/05/2014	QA

In Addition to GlobTek Inc.'s renewed ISO9001:2015 - Quality Management System Certification, GlobTek Inc. is now certified to:

ISO13485:2016 - Medical Devices Quality Management System Certification
ISO14001:2015 - Environmental Management System Certification

ISO Certificates are available online at <https://www.globtek.com/iso-certificates/>

Customer Approval of Specification:

Please approve, sign and send back to GlobTek so we can complete order processing.

A delay in receipt of this form will delay delivery schedule.

Company Name:

Customer P/N:

Quote Number:

Date:

Authorized Representative Name:

Authorized Representative Signature:

The acceptance of this specification and use of the product described in this document indicates the acceptance and binding of the customer to Globtek terms and conditions, which supersede all other agreements, terms, and conditions (<https://en.globtek.com/terms-and-conditions/>).

The purchaser of this product (Customer) agrees that it is their sole responsibility to determine suitability/fitness of the product described in this specification for their application and to take precautions for protection against any hazards attendant to the handling and use of the product.

Footnote:

GlobTek Inc. will not be liable for the safety and performance of these power supplies if unauthorized access and repair occurs. End user should consult applicable UL, CSA or EN standards for proper installation instruction.

Limitation of Use:

GlobTek products are intended for use with commercial, medical, and/or industrial equipment only. GlobTek product are not authorized for use as mission critical components in life support hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of GlobTek Inc.
Contents of this document are subject to change without prior notice.

RELEASED

By pudxc at 4:01 pm, Mar 25, 2020

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN

WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2012 - 2020

specC /03/23/2020 3:05:06 PM

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: GT-41130-2012-T3, ITE Power Supply, Efficiency Level: V, Case Color/Style: GlobTek Black, Desktop/External, Regulated Switchmode AC-DC Power Supply AC Adaptor, Input Rating: 100-240V~, 50-60 Hz, IEC 60320/C14 , Output Rating: 24W, 12.0V@2.0A, Output Configuration: 1530 mm, 18/1C + Shield Cond, UL 1185, Female Barrel 5.5*2.1*11mm No internal Spring Clip nor Locking Notch or Equal, Ferrite: None, GlobTek Black, GT Cord # C0134, Pin Out: Center Positive (+V), Blades/Input Cord: (Order Separately), Approvals: EAC; Korea (15V, 16V, 24V); PSE; WEEE; CE; NRCAN; China RoHS; Class I; Level V; NEMKO 60950; FCC; CCC; Ukraine; RoHS; VCCI; RCM; IP40; UL/cUL; LPS 60950; South Africa; Malaysia; IRAM; HKSM; NOM (24V only); CB 60950;
	Model No. GT-41130-2012-T3
	Part No./Ordering No. TR9CE2000CCP-N(RVB)
	Rev D1

POWER SUPPLY INFORMATION

TYPE:	Desktop/External
TECHNOLOGY:	Regulated Switchmode AC-DC Power Supply AC Adaptor
CASE COLOR:	GlobTek Black
NAMEPLATE RATED INPUT:	100-240V~, 50-60 Hz, 0.8A
INPUT CONFIG:	IEC 60320/C14
WATTS:	24.0
VOLTS OUT:	12.0
CURRENT OUT (Amps):	2.0
BLADE/CORD INCLUDED:	None (Order Separately)
BLADE/CORD INSTALLED:	None :(Order Separately)
INGRESS PROTECTION:	IP40
GROUNDING CONFIGURATION:	(E1) Earthed output
EFFICIENCY LEVEL:	V
OUTPUT CONFIGURATION:	1530 mm, 18/1C + Shield Cond, UL 1185, Female Barrel 5.5*2.1*11mm No internal Spring Clip nor Locking Notch or Equal, Ferrite: None, GlobTek Black, GT Cord # C0134
CONNECTOR PIN OUT:	Center Positive (+V)
LABEL SPECS:	Standard GT,L-1186
SPECIAL BARCODE LABEL	No
MATERIAL:	
PACK SPEC:	Standard DT, Individually Box
USER MANUAL:	

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2012 - 2020
specC /03/23/2020 3:05:06 PM

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: GT-41130-2012-T3, ITE Power Supply, Efficiency Level: V, Case Color/Style: GlobTek Black, Desktop/External, Regulated Switchmode AC-DC Power Supply AC Adaptor, Input Rating: 100-240V~, 50-60 Hz, IEC 60320/C14 , Output Rating: 24W, 12.0V@2.0A, Output Configuration: 1530 mm, 18/1C + Shield Cond, UL 1185, Female Barrel 5.5*2.1*11mm No internal Spring Clip nor Locking Notch or Equal, Ferrite: None, GlobTek Black, GT Cord # C0134, Pin Out: Center Positive (+V), Blades/Input Cord: (Order Separately), Approvals: EAC; Korea (15V, 16V, 24V); PSE; WEEE; CE; NrCAN; China RoHS; Class I; Level V; NEMKO 60950; FCC; CCC; Ukraine; RoHS; VCCI; RCM; IP40; UL/cUL; LPS 60950; South Africa; Malaysia; IRAM; HKSM; NOM (24V only); CB 60950;
	Model No. GT-41130-2012-T3
	Part No./Ordering No. TR9CE2000CCP-N(RVB)
	Rev D1

Notes/Modifications/Customizations (notes in this section supersede the values shown in the standard spec):

DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE.

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: GT-41130-2012-T3, ITE Power Supply, Efficiency Level: V, Case Color/Style: GlobTek Black, Desktop/External, Regulated Switchmode AC-DC Power Supply AC Adaptor, Input Rating: 100-240V~, 50-60 Hz, IEC 60320/C14 , Output Rating: 24W, 12.0V@2.0A, Output Configuration: 1530 mm, 18/1C + Shield Cond, UL 1185, Female Barrel 5.5*2.1*11mm No internal Spring Clip nor Locking Notch or Equal, Ferrite: None, GlobTek Black, GT Cord # C0134, Pin Out: Center Positive (+V), Blades/Input Cord: (Order Separately), Approvals: EAC; Korea (15V, 16V, 24V); PSE; WEEE; CE; NrCAN; China RoHS; Class I; Level V; NEMKO 60950; FCC; CCC; Ukraine; RoHS; VCCI; RCM; IP40; UL/cUL; LPS 60950; South Africa; Malaysia; IRAM; HKSM; NOM (24V only); CB 60950;
	Model No. GT-41130-2012-T3
	Part No./Ordering No. TR9CE2000CCP-N(RVB)
	Rev D1

ELECTRICAL SPECIFICATIONS

A) ELECTRICAL SPECIFICATIONS:

01. Input Voltage: Specified 90-264 Vac, Nameplate rated: 100-240Vac
02. Input Frequency: Specified 47-63 Hz, Nameplate rated 50-60Hz
03. Output Regulation: +/- 5% measured at the output connector
04. Line Voltage Regulation: +/- 1% typical measured at output connector
05. Output Ripple (Vp-p): +/-1% or 150 mV whichever is greater, measured at 20 MHz bandwidth with 0.1 uf ceramic capacitor in parallel with 10 uf electrolytic capacitor connected at the end of the output connector at nominal line
06. Turn-ON/OFF Overshoot: 5% maximum, 1 mS typical recovery time for 25% step load
07. Turn-ON Delay: 1 Sec, typical
08. Hold-Up Time: 8 mS typical at nominal input voltage and full load
09. Inrush Current: 30A typical at 115VAC input and 60A typical at 230 VAC input
10. Switching Frequency: 65 KHz typical

B) PROTECTION

01. Over-Voltage: Protected Zener clamp across the output
02. Short Circuit: Protected unit will auto recover upon removal of fault
03. Input Protection: Input line fusing

C) SAFETY

01. Dielectric Withstand Voltage: 4242Vdc from primary to secondary
02. Touch Current: <0.25mA @ 240Vac input voltage
03. Earth continuity test:<0.1 Ohm or < 0.2 Ohm when with a non-detachable Power Supply cord, Class I Only
04. ROHS 2: Complies with EU 2011/65/EU and China SJ/T 11363-2006

D) OTHER:

01. MTBF: 200,000 Hours @ 25°C ambient temperature
02. Operating Temperature: 0°C to 40°C ambient temperature
03. Humidity: 0% to 90% relative humidity
04. Storage Temperature: -10°C to 80°C
05. Cooling: Convection

E) ENCLOSURE

01. Housing: High impact plastic, 94V0 polycarbonate, non-vented
02. Size: 50 x 80.6 x 31mm +/- 1.0
03. Markings: Pad Printed and/or Molded into the case

TO ADDRESS SYSTEM-LEVEL EMI CONCERNS, FERRITE CHOKES/BEADS MAY BE ADDED/REVISED UPON REQUEST. A SAMPLE KIT OF GLOBTEK'S STANDARD FERRITES IS AVAILABLE UNDER GLOBTEK P/N: EMI-MITIGATION-KIT1

FOR ADDITIONAL INFORMATION, PLEASE READ OUR WHITE PAPER AT:

<https://en.globtek.com/technical-articles/ferrite-kit-radiated-emi-suppression-kit-for-globtek-power-supplies-cable-assemblies>

INGRESS PROTECTION: IP40


PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN


WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2012 - 2020

specC /03/23/2020 3:05:06 PM

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: GT-41130-2012-T3, ITE Power Supply, Efficiency Level: V, Case Color/Style: GlobTek Black, Desktop/External, Regulated Switchmode AC-DC Power Supply AC Adaptor, Input Rating: 100-240V~, 50-60 Hz, IEC 60320/C14 , Output Rating: 24W, 12.0V@2.0A, Output Configuration: 1530 mm, 18/1C + Shield Cond, UL 1185, Female Barrel 5.5*2.1*11mm No internal Spring Clip nor Locking Notch or Equal, Ferrite: None, GlobTek Black, GT Cord # C0134, Pin Out: Center Positive (+V), Blades/Input Cord: (Order Separately), Approvals: EAC; Korea (15V, 16V, 24V); PSE; WEEE; CE; NrCAN; China RoHS; Class I; Level V; NEMKO 60950; FCC; CCC; Ukraine; RoHS; VCCI; RCM; IP40; UL/cUL; LPS 60950; South Africa; Malaysia; IRAM; HKSM; NOM (24V only); CB 60950; Model No. GT-41130-2012-T3 Part No./Ordering No. TR9CE2000CCP-N(RVB)	Rev D1
---	---	---------------

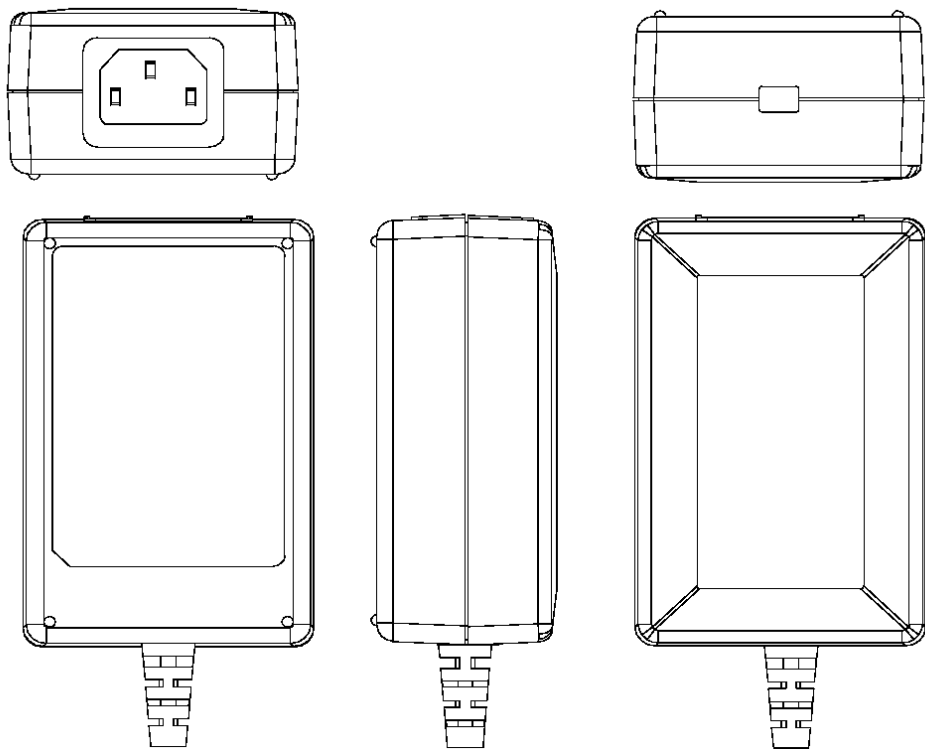


GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: GT-41130-2012-T3, ITE Power Supply, Efficiency Level: V, Case Color/Style: GlobTek Black, Desktop/External, Regulated Switchmode AC-DC Power Supply AC Adaptor, Input Rating: 100-240V~, 50-60 Hz, IEC 60320/C14 , Output Rating: 24W, 12.0V@2.0A, Output Configuration: 1530 mm, 18/1C + Shield Cond, UL 1185, Female Barrel 5.5*2.1*11mm No internal Spring Clip nor Locking Notch or Equal, Ferrite: None, GlobTek Black, GT Cord # C0134, Pin Out: Center Positive (+V), Blades/Input Cord: (Order Separately), Approvals: EAC; Korea (15V, 16V, 24V); PSE; WEEE; CE; NrCAN; China RoHS; Class I; Level V; NEMKO 60950; FCC; CCC; Ukraine; RoHS; VCCI; RCM; IP40; UL/cUL; LPS 60950; South Africa; Malaysia; IRAM; HKSM; NOM (24V only); CB 60950; <tr> <td data-bbox="300 262 1356 304"> Model No. GT-41130-2012-T3 </td><td data-bbox="1356 262 1550 304"></td></tr> <tr> <td data-bbox="300 304 1356 346"> Part No./Ordering No. TR9CE2000CCP-N(RVB) </td><td data-bbox="1356 304 1550 346"> Rev D1 </td></tr>	Model No. GT-41130-2012-T3		Part No./Ordering No. TR9CE2000CCP-N(RVB)	Rev D1
Model No. GT-41130-2012-T3					
Part No./Ordering No. TR9CE2000CCP-N(RVB)	Rev D1				



GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: GT-41130-2012-T3, ITE Power Supply, Efficiency Level: V, Case Color/Style: GlobTek Black, Desktop/External, Regulated Switchmode AC-DC Power Supply AC Adaptor, Input Rating: 100-240V~, 50-60 Hz, IEC 60320/C14 , Output Rating: 24W, 12.0V@2.0A, Output Configuration: 1530 mm, 18/1C + Shield Cond, UL 1185, Female Barrel 5.5*2.1*11mm No internal Spring Clip nor Locking Notch or Equal, Ferrite: None, GlobTek Black, GT Cord # C0134, Pin Out: Center Positive (+V), Blades/Input Cord: (Order Separately), Approvals: EAC; Korea (15V, 16V, 24V); PSE; WEEE; CE; NrCAN; China RoHS; Class I; Level V; NEMKO 60950; FCC; CCC; Ukraine; RoHS; VCCI; RCM; IP40; UL/cUL; LPS 60950; South Africa; Malaysia; IRAM; HKSM; NOM (24V only); CB 60950;
Model No. GT-41130-2012-T3	Rev D1
Part No./Ordering No. TR9CE2000CCP-N(RVB)	

INPUT CONFIGURATION

(E1) Earthed output

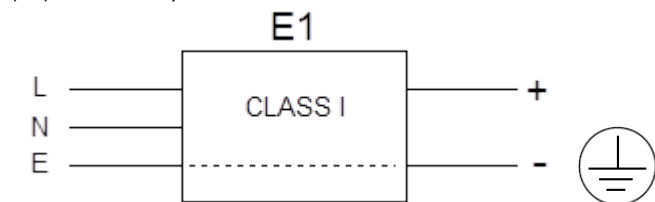


[Alternate grounding configurations](#) available upon request.

Blades/Cord Included:None:(Order Separately)

Blades/Cord Installed:None:(Order Separately)

IEC 60320/C14 AC Inlet Connector, Class I, Earth Ground



Mates with IEC 60320/C13 Plug

Optional Locking IEC60320 Receptacle and cord option available on some models by request.:



[Standard International IEC 320/C13 Cordsets](#)

Below are standard cordsets which are "not included" (unless stated above); these can be purchased separately or packaged with the power supply. Contact your Sales Engineer if the style required is not shown below. Many more available in different lengths, colors or cable material.

Stock Power Supply Cords

Part Number/ Link	Country	Plug	Termination	Length (mm)	(Ft)
3021457F701(R)	N. American (Type B)	NEMA 5-15P	IEC 320/C13	2150	7

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN

WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2012 - 2020

specC /03/23/2020 3:05:06 PM

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: GT-41130-2012-T3, ITE Power Supply, Efficiency Level: V, Case Color/Style: GlobTek Black, Desktop/External, Regulated Switchmode AC-DC Power Supply AC Adaptor, Input Rating: 100-240V~, 50-60 Hz, IEC 60320/C14, Output Rating: 24W, 12.0V@2.0A, Output Configuration: 1530 mm, 18/1C + Shield Cond, UL 1185, Female Barrel 5.5*2.1*11mm No internal Spring Clip nor Locking Notch or Equal, Ferrite: None, GlobTek Black, GT Cord # C0134, Pin Out: Center Positive (+V), Blades/Input Cord: (Order Separately), Approvals: EAC; Korea (15V, 16V, 24V); PSE; WEEE; CE; NRCAN; China RoHS; Class I; Level V; NEMKO 60950; FCC; CCC; Ukraine; RoHS; VCCI; RCM; IP40; UL/cUL; LPS 60950; South Africa; Malaysia; IRAM; HKSM; NOM (24V only); CB 60950;	
	Model No. GT-41130-2012-T3	
	Part No./Ordering No. TR9CE2000CCP-N(RVB)	Rev D1

1191068F0701(R)	N. American (Type B)	NEMA 5-15P Hospital	IEC 320/C13	2459	8
2194272M5701-T(R)	Argentina (Type I)	IRAM 2073	IEC 320/C13	2500	8
5502022M5701A(R)	Australian (Type I)	AS3112 / 3 PRONG	IEC 320/C13	2500	8
204B4272M5701(R)	Brazil (Type N)	BRAZIL	IEC 320/C13	2500	8
6023602M5701(R)	China (Type I)	CCC GR2099	IEC 320/C13	2500	8
G8014272M5701(R)	Danish (Type K)	AFSNIT SECTION 107-2-D1	IEC 320/C13	2500	8
23144272M5701-T(R)	Europe (Type E)	CEE 7/7	IEC 320/C13	2500	8
205IN4272M5701(R)	India (Type D)	India IS 1293 (also known as IA16A3 or BS546)	IEC 320/C13	2500	8
208IN4272M5701(R)	India (Type M)	India IS 1293 (also known as IA16A3 or BS546)	IEC320/C13	2500	8
377C4272M5701(R)	Israel (Type H)	ISL 377C	IEC 320/C13	2500	8
23024272M5701(R)	Italy (Type L)	CEI 23-16/VII	IEC 320/C13	2500	8
3003339F701(R) [3x1.25mm2]	Japan (Type B)	JIS 8303 / 3 PINS	IEC 320/C13	2500	8
3003068F2701-HK(R) [3 x 2.0mm2]					
302J115J6F0701J(R)	Japan / North America (Type B – 12A)	JIS 8303 / 3 PINS and NEMA 5-15P (PSE and UL/CUL appr)	IEC 320/C13	1830	6
302J104J6F0701J(R)	Japan / North America (Type B – 15A)	JIS 8303 / 3 PINS and NEMA 5-15P (PSE and UL/CUL appr)	IEC 320/C13	1830	6
2313K3432M5701(R)	Korea (Type F)	KS C 8305	IEC 320/C13	2500	8
5804272M5701(R)	Russia (Type F)	GOST 7396	IEC 320/C13	2500	8
2084272M5701(R)	South Africa (Type M)	South Africa SABS164-1 (16A type)	IEC 320/C13	2500	8
23214272M5701(R)	Switzerland (Type J)	SEV 1011	IEC 320/C13	2500	8
3003322M5701(R)	Taiwan (Type B)	BSMI	IEC 320/C13	2500	8
PZ0800100-2M5BK13H(R)	UK, Hong Kong, Singapore, Gulf States (Type G)	BS 1363A	IEC 320/C13	2500	8
7055002M5701A(R)	International	IEC 320 C14-C13	IEC 320/C13	2500	8


GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: GT-41130-2012-T3, ITE Power Supply, Efficiency Level: V, Case Color/Style: GlobTek Black, Desktop/External, Regulated Switchmode AC-DC Power Supply AC Adaptor, Input Rating: 100-240V~, 50-60 Hz, IEC 60320/C14 , Output Rating: 24W, 12.0V@2.0A, Output Configuration: 1530 mm, 18/1C + Shield Cond, UL 1185, Female Barrel 5.5*2.1*11mm No internal Spring Clip nor Locking Notch or Equal, Ferrite: None, GlobTek Black, GT Cord # C0134, Pin Out: Center Positive (+V), Blades/Input Cord: (Order Separately), Approvals: EAC; Korea (15V, 16V, 24V); PSE; WEEE; CE; NRCAN; China RoHS; Class I; Level V; NEMKO 60950; FCC; CCC; Ukraine; RoHS; VCCI; RCM; IP40; UL/cUL; LPS 60950; South Africa; Malaysia; IRAM; HKSM; NOM (24V only); CB 60950;
Model No. GT-41130-2012-T3	Part No./Ordering No. TR9CE2000CCP-N(RVB) Rev D1

OUTPUT CORD AND CONNECTOR: C1/C0134

ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW

CABLE TYPE	UL 1185
CABLE LENGTH (mm)	1530
CABLE TOLERANCE (mm)	+150-0
WIRE GAUGE (AWG)	18
CONDUCTORS	1C + Shield
HANK DIMENSION (mm)	70mm +10 -10
CABLE / CONNECTOR OVERMOLD COLOR	GlobTek Black
FERRITE TYPE / DIMENSION	None
FERRITE # OF TURNS (Definition)	N/A
FERRITE DIMENSION FROM STRAIN RELIEF	N/A
FERRITE DIMENSION FROM PLUG	N/A
PLUG TYPE	Female Barrel 5.5*2.1*11mm No internal Spring Clip nor Locking Notch or Equal
OUTPUT CONNECTOR SEX	
OVERMOLDED	
OVER MOLD ORIENTATION	Straight
CONNECTOR PIN OUT:	Center Positive (+V)

ADDITIONAL REQUIREMENTS

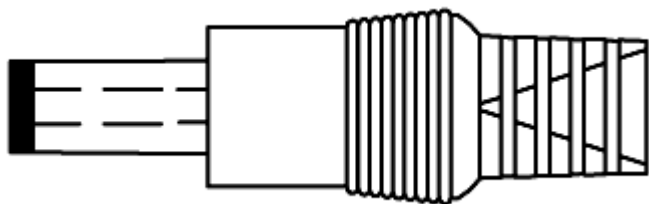

ADDITIONAL OUTPUT PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/>
STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/>

TO ADDRESS SYSTEM-LEVEL EMI CONCERNS, FERRITE CHOKES/BEADS MAY BE ADDED/REVISED UPON REQUEST. A SAMPLE KIT OF GLOBTEK'S STANDARD FERRITES IS AVAILABLE UNDER GLOBTEK P/N: EMI-MITIGATION-KIT1

FOR ADDITIONAL INFORMATION, PLEASE READ OUR WHITE PAPER AT:

<https://en.globtek.com/technical-articles/ferrite-kit-radiated-emi-suppression-kit-for-globtek-power-supplies-cable-assemblies>

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2012 - 2020
specC /03/23/2020 3:05:06 PM

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: GT-41130-2012-T3, ITE Power Supply, Efficiency Level: V, Case Color/Style: GlobTek Black, Desktop/External, Regulated Switchmode AC-DC Power Supply AC Adaptor, Input Rating: 100-240V~, 50-60 Hz, IEC 60320/C14, Output Rating: 24W, 12.0V@2.0A, Output Configuration: 1530 mm, 18/1C + Shield Cond, UL 1185, Female Barrel 5.5*2.1*11mm No internal Spring Clip nor Locking Notch or Equal, Ferrite: None, GlobTek Black, GT Cord # C0134, Pin Out: Center Positive (+V), Blades/Input Cord: (Order Separately), Approvals: EAC; Korea (15V, 16V, 24V); PSE; WEEE; CE; NrCAN; China RoHS; Class I; Level V; NEMKO 60950; FCC; CCC; Ukraine; RoHS; VCCI; RCM; IP40; UL/cUL; LPS 60950; South Africa; Malaysia; IRAM; HKSM; NOM (24V only); CB 60950; Model No. GT-41130-2012-T3 Part No./Ordering No. TR9CE2000CCP-N(RVB) Rev D1
---	---

LABEL:L-1186

LABEL P/N:	Standard GT
MATERIAL:	Flat Thermal Transfer, Imprintable, Polyester Label and/or Pad Printed and/or Molded, and/or Laser Engraved in the case
BACKGROUND COLOR:	Black if housing is Black, White or Silver if housing is White or Gray.
TEXT COLOR:	White or Silver if label is Black Background for Black housing. Black if label is White or Silver background and Housing is White or Gray.
LABEL WIDTH (mm):	39.6
LABEL HEIGHT (mm):	59.6
SPECIAL BARCODE LABEL MATERIAL:	No

Below is the minimum information which will appear on the label. NOTE: in the logo area additional/actual positioning of symbols and text is subjected to change as per agency updates/requirements or additional model approvals become available.
Regulatory certifications/label markings may be in logo area on the label or molded into the case housing outside the label area.
Information will be shown via label and/or pad printed and/or molded and/or laser engraved in the case. * Date code markings at GlobTek option.

GlobTek, Inc.
www.globtek.com

**Regulatory Certifications/
Label Markings**
(see below)

MADE IN XXX XX制造

DATE CODE

↑
XXX = USA or CHINA

DATE CODE A *:

DATE CODE LABEL



Series NO. Week Year
Class NO. for production

or

DATE CODE B *:

WWYY
WW = WEEK
YY = YEAR

A=ITE Power Supply
B=P/N: (料号) TR9CE2000CCP-N(RVB)
C=Model (型号) GT-41130-2012-T3
D=Input (输入)100-240V~, 50-60 Hz, 0.8A
E=Output (输出)12.0 V 2.0 A, 24,0W

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN Page 10 of 13
WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2012 - 2020
specC /03/23/2020 3:05:06 PM

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: GT-41130-2012-T3, ITE Power Supply, Efficiency Level: V, Case Color/Style: GlobTek Black, Desktop/External, Regulated Switchmode AC-DC Power Supply AC Adaptor, Input Rating: 100-240V~, 50-60 Hz, IEC 60320/C14 , Output Rating: 24W, 12.0V@2.0A, Output Configuration: 1530 mm, 18/1C + Shield Cond, UL 1185, Female Barrel 5.5*2.1*11mm No internal Spring Clip nor Locking Notch or Equal, Ferrite: None, GlobTek Black, GT Cord # C0134, Pin Out: Center Positive (+V), Blades/Input Cord: (Order Separately), Approvals: EAC; Korea (15V, 16V, 24V); PSE; WEEE; CE; NRCAN; China RoHS; Class I; Level V; NEMKO 60950; FCC; CCC; Ukraine; RoHS; VCCI; RCM; IP40; UL/cUL; LPS 60950; South Africa; Malaysia; IRAM; HKSM; NOM (24V only); CB 60950; Model No. GT-41130-2012-T3 Part No./Ordering No. TR9CE2000CCP-N(RVB)
	Rev D1

AGENCY ONLINE DOCUMENTS

CE EC-Declaration for Medical	http://www.globtek.info/certs/GT-41130-T2-T3-T3A/
CE EC-Declaration for Industrial/Commercial/ITE	http://globtek.force.com/models/ec_declaration_product?id=01ta0000003dW4n&i=4
CE EC-Declaration for Household	Contact GlobTek for more information
RoHS/RoHS3 Declaration	https://www.globtek.com/pdf/rohs_cert/01ta0000003dW4nAAE
REACH Declaration	https://www.globtek.com/pdf/iso_certificates/REACH.pdf
Conflict Minerals Declaration	https://www.globtek.com/pdf/conflict-minerals.pdf

IPXY rating is based on 3rd party testing and customers should check suitability and test system level IPXY rating before ordering.

Regulatory Certifications/Label Markings

LATEST PRODUCT/MODEL CERTIFICATIONS: <http://en.globtek.com/datasheet/id/a0030000008Umad>

AGENCY ONLINE DOCUMENTS: <http://www.globtek.info/certs/GT-41130-T2-T3-T3A/>



(E1) Earthed output




Center Positive (+V)

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: GT-41130-2012-T3, ITE Power Supply, Efficiency Level: V, Case Color/Style: GlobTek Black, Desktop/External, Regulated Switchmode AC-DC Power Supply AC Adaptor, Input Rating: 100-240V~, 50-60 Hz, IEC 60320/C14 , Output Rating: 24W, 12.0V@2.0A, Output Configuration: 1530 mm, 18/1C + Shield Cond, UL 1185, Female Barrel 5.5*2.1*11mm No internal Spring Clip nor Locking Notch or Equal, Ferrite: None, GlobTek Black, GT Cord # C0134, Pin Out: Center Positive (+V), Blades/Input Cord: (Order Separately), Approvals: EAC; Korea (15V, 16V, 24V); PSE; WEEE; CE; NrCAN; China RoHS; Class I; Level V; NEMKO 60950; FCC; CCC; Ukraine; RoHS; VCCI; RCM; IP40; UL/cUL; LPS 60950; South Africa; Malaysia; IRAM; HKSM; NOM (24V only); CB 60950; Model No. GT-41130-2012-T3 Part No./Ordering No. TR9CE2000CCP-N(RVB) Rev D1
---	--

PACKAGING

Packing Spec P/N:	Standard DT, Individually Box
Box Qty:	80
Gift Box Size (mm):	110 x 57 x 70mm
Gift Box Color:	White
Master Carton Size (mm):	463 x 318 x 305
Master Carton Cubic Volume (m³):	0.04
Master GW (Kg):	15,6 kg
BLADES INCLUDED:	None: (Order Separately)
BLADE/CORD INSTALLED:	None: (Order Separately)
USER MANUAL:	
USER MANUAL WEB LINK:	

If specific packaging is required, this section must specify all requirements and note "no exceptions". If this section does not specify packaging, it is subject to change without notice at GlobTek's discretion

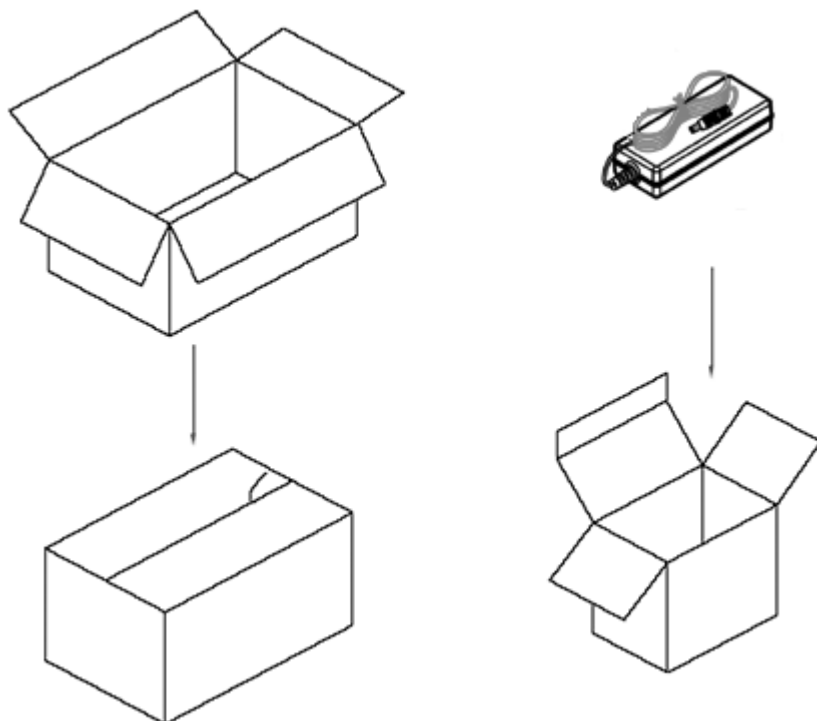

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN Page 12 of 13
WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2012 - 2020
specC /03/23/2020 3:05:06 PM

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: GT-41130-2012-T3, ITE Power Supply, Efficiency Level: V, Case Color/Style: GlobTek Black, Desktop/External, Regulated Switchmode AC-DC Power Supply AC Adaptor, Input Rating: 100-240V~, 50-60 Hz, IEC 60320/C14 , Output Rating: 24W, 12.0V@2.0A, Output Configuration: 1530 mm, 18/1C + Shield Cond, UL 1185, Female Barrel 5.5*2.1*11mm No internal Spring Clip nor Locking Notch or Equal, Ferrite: None, GlobTek Black, GT Cord # C0134, Pin Out: Center Positive (+V), Blades/Input Cord: (Order Separately), Approvals: EAC; Korea (15V, 16V, 24V); PSE; WEEE; CE; NrCAN; China RoHS; Class I; Level V; NEMKO 60950; FCC; CCC; Ukraine; RoHS; VCCI; RCM; IP40; UL/cUL; LPS 60950; South Africa; Malaysia; IRAM; HKSM; NOM (24V only); CB 60950;
Model No. GT-41130-2012-T3	
Part No./Ordering No. TR9CE2000CCP-N(RVB)	Rev D1

INSTRUCTIONS TO THE OEM SYSTEMS ENGINEER

It is the responsibility of the OEM systems engineer to provide the end system user instructions and warnings for the use of this product in the end system.

If an input cord is required for this product, AC Mains voltage should be provided to the power supply by a power supply cord approved to the national standards of the country in which it will be used.

This power supply is not designed to be repaired. No serviceable parts inside. A blown internal fuse is an indication of catastrophic failure of circuit component(s). If a Failure Analysis is required for a failed power supply/battery charger, please return the damaged unit to Globtek for an accurate determination of the root cause of the failure.

EMC Compliance of the complete OEM product, including the GlobTek power supply/battery charger needs to be verified by the OEM systems engineer.

INSTRUCTION SHEET

N/A