




ASSEMBLY - VIEW FROM TOP

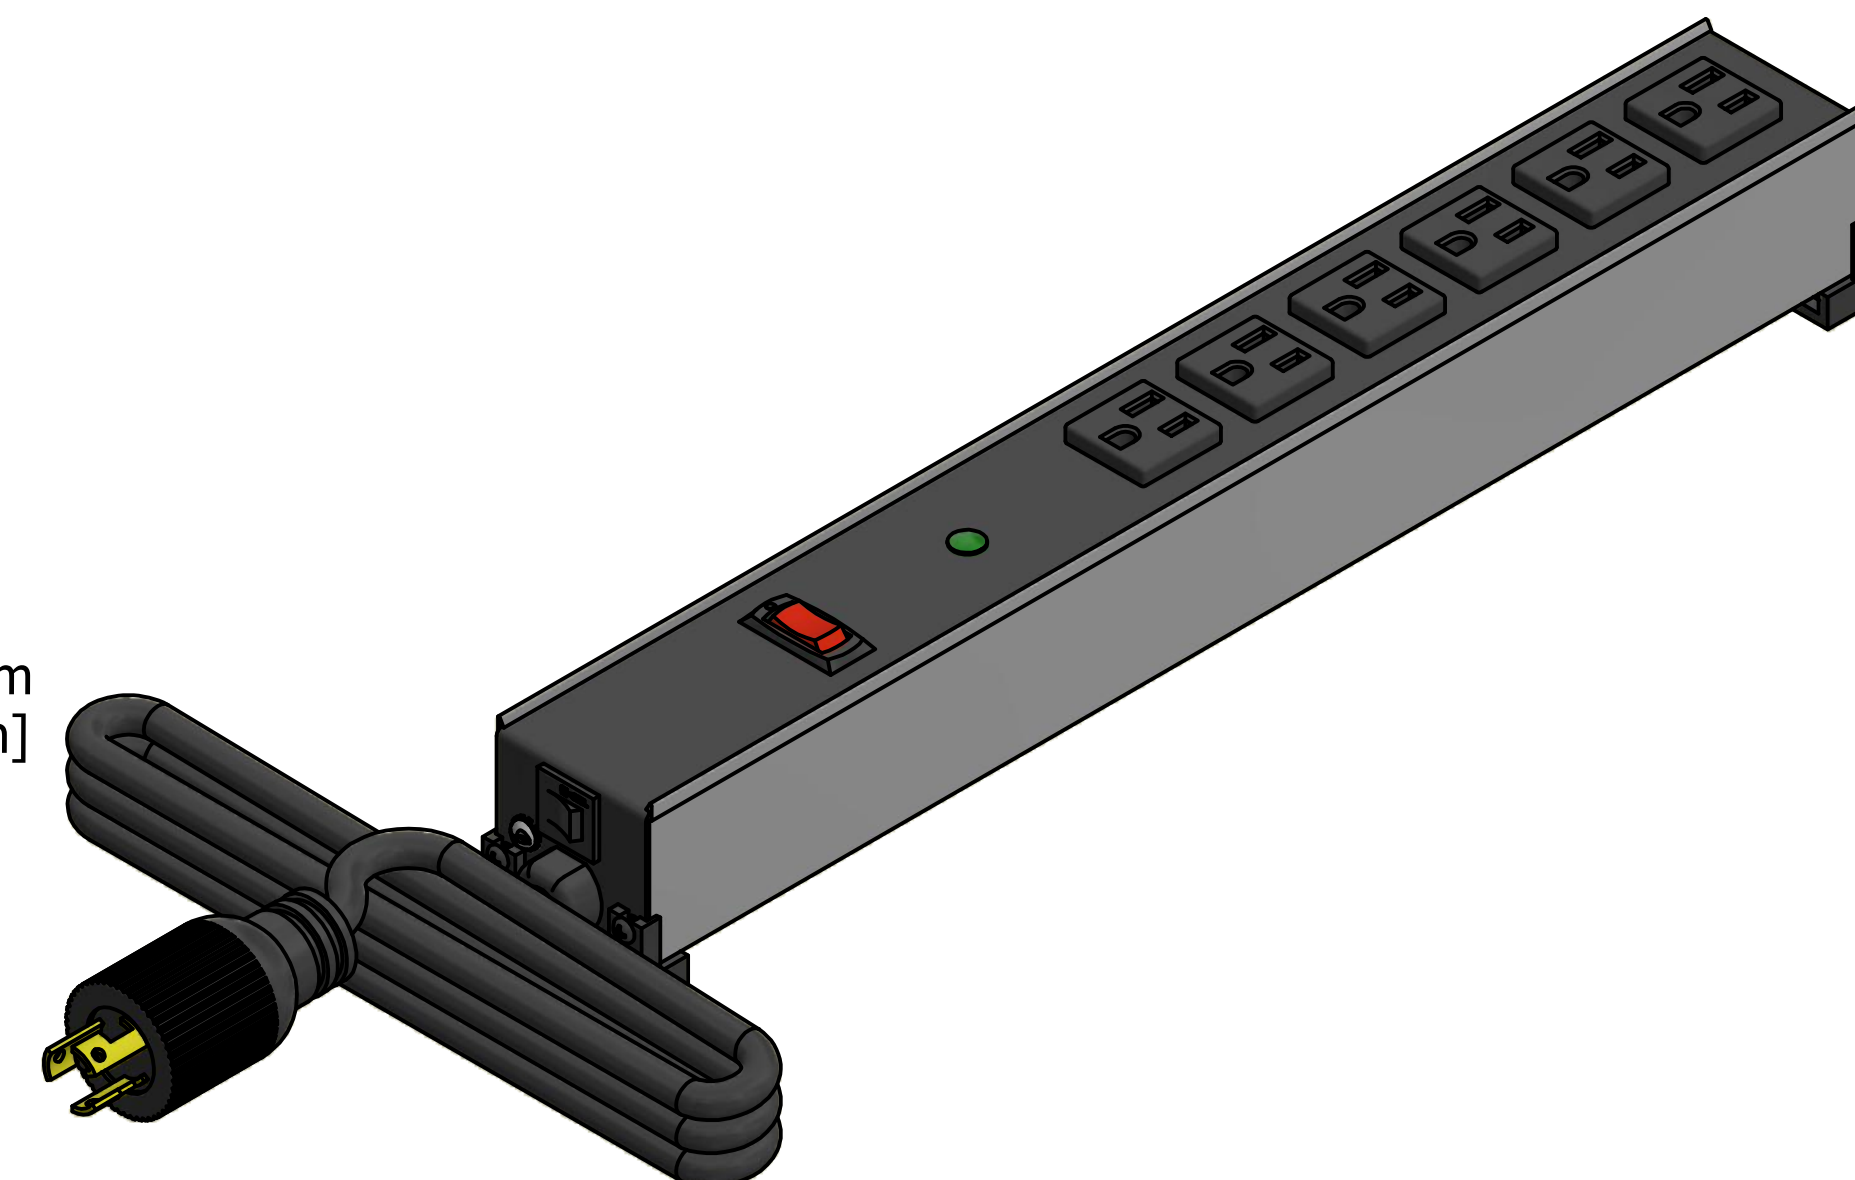


ISOMETRIC VIEW

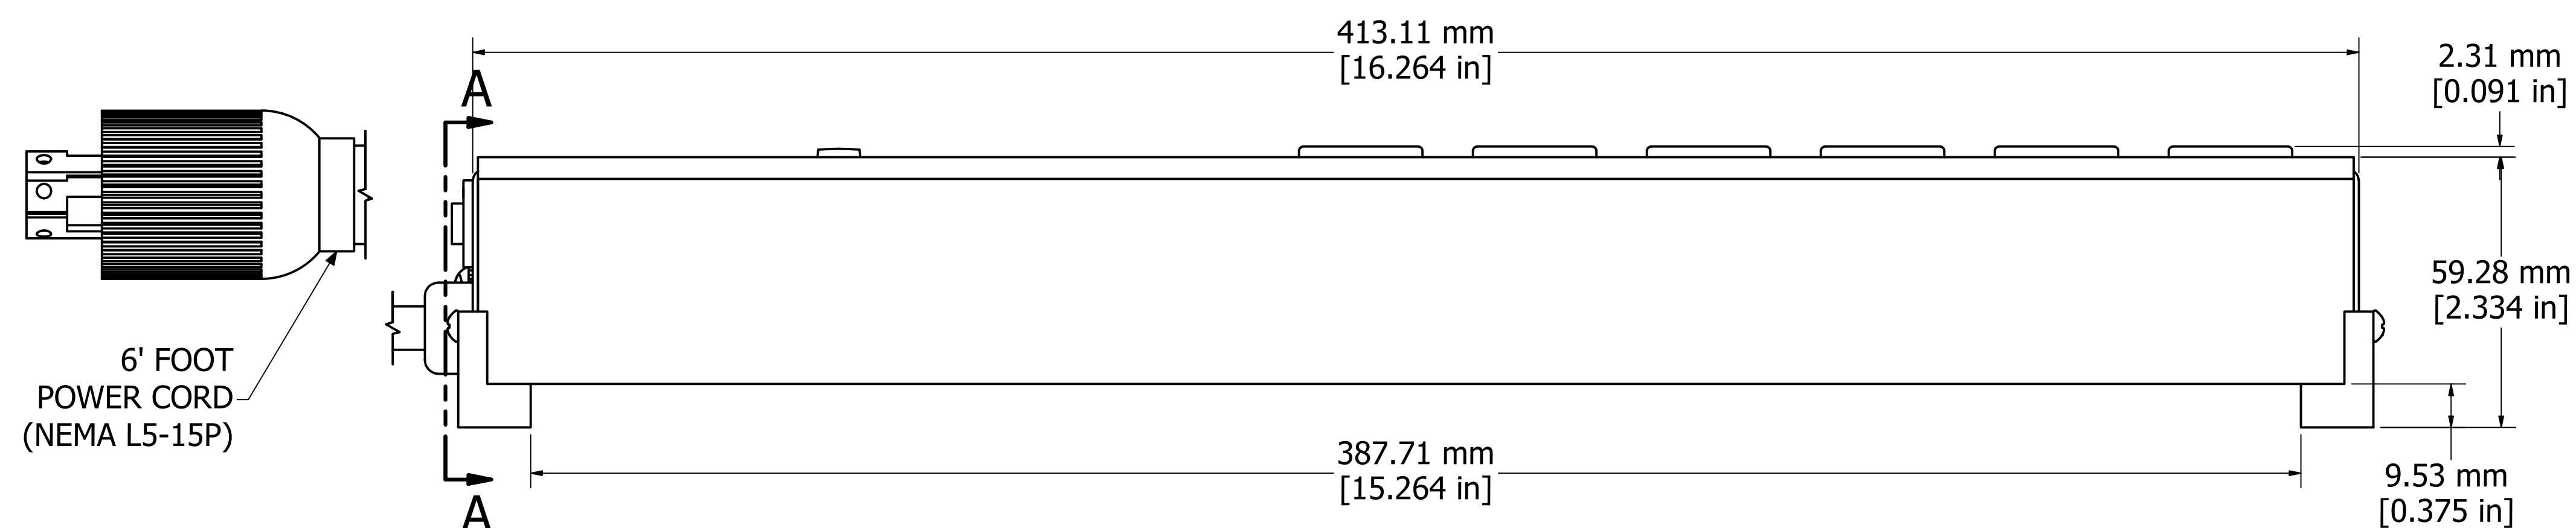

ASSEMBLY - VIEW FROM SIDE

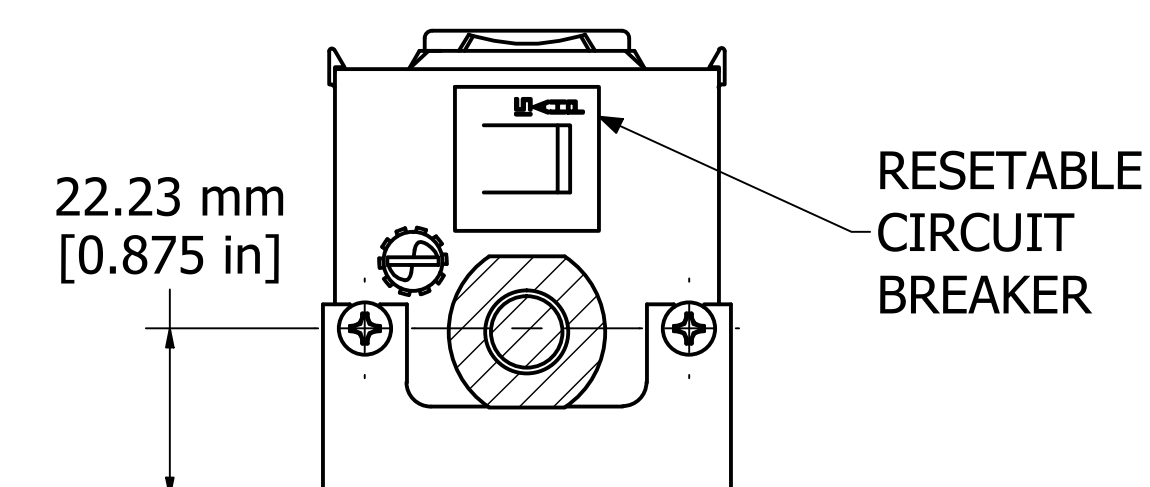

SECTION A-A

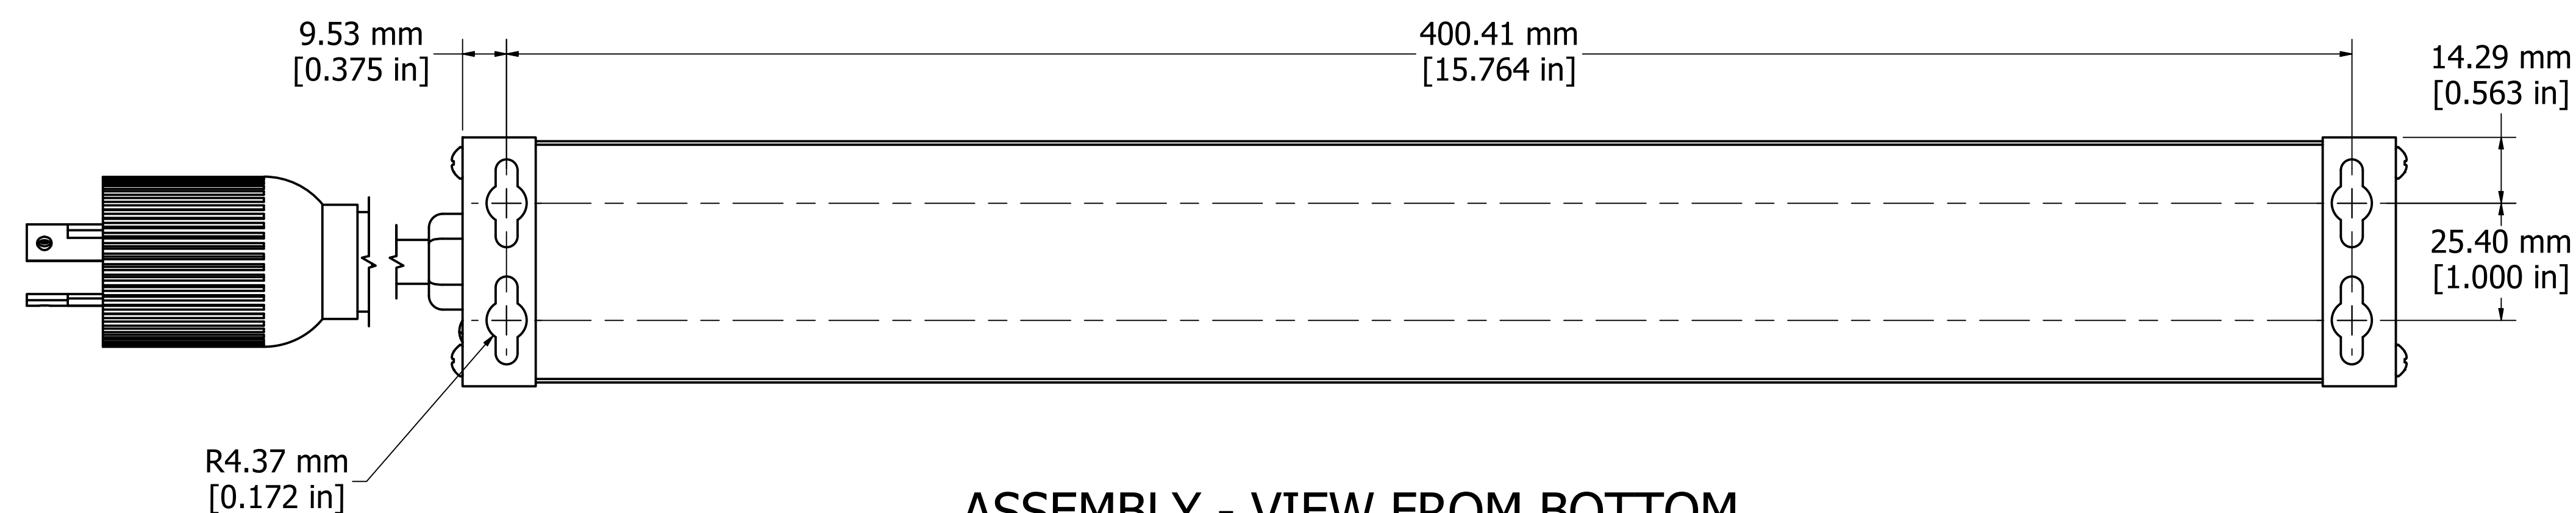

ASSEMBLY - VIEW FROM BOTTOM

1584H6C1S

Finish - Top - Black Painted Steel

Bottom - Aluminum Extrusion

Rated - 120 VAC, 60 Hz, 15 Amps

Approvals - cULus Listed to: UL1449 & C22.2 No. 269.3-17

Surge Specs - 1080 Joules, 75000 Amps Transient Current

- 500V Voltage Protection Rating (VPR)



**HAMMOND
MANUFACTURING™**

1584H6C1S

www.hammondmfg.com