

Overview

Basic, reliable power distribution for your HPE IT solutions

HPE Standard Series G2 Basic PDUs are designed to work precisely with HPE Infrastructure and Compute solutions. Designed for use with HPE Standard, Advanced, and Enterprise racks (and compatible with other industry-standard server racks), HPE G2 Basic PDUs guarantee a compatible fit and reliable operation backed by a 5 year warranty. Built with high-temperature grade premium components, our G2 Basic PDUs can operate reliably in operating temperatures up to 60°C over extended periods of time.

A major concern for IT administrators and facility managers is their ability to quickly diagnose and service power related problems in their IT racks. HPE addresses this problem by, first, offering a wide range of PDU models and mounting options that promote flexible power configuration in your racks. Vertical, Horizontal, and True OU mounting, an exclusive feature only offered by HPE, give you the flexibility to efficiently utilize rack space while placing access to power where you need it most in the rack. Serviceability is further enhanced with features such as color-coded outlets and low-profile form factors which allow for simple and quick access to IT equipment and power cables in the rear of the rack.

A new feature exclusive to HPE G2 PDUs are the optional IEC Locking Power Cords that provide secure cable retention to both the PDU and target device. Whether providing enhanced protection against vibration during shipping or ensuring that cables are not dislodged during a service event, HPE's IEC Locking Power Cords provide a safe and secure solution against the common issues that lead to power-related downtime.

Why HPE Basic PDUs?

- HPE Foundation Care services purchased for server and storage products, such as extended warranties and premium support services, extend to our Basic PDU products free of charge when purchased together.
- HPE guarantees 100% compatibility between its Rack and Power Infrastructure products and its industry-standard compute, storage, and networking solutions, backed with a 5-year warranty for all Basic PDU models.
- HPE offers multiple Basic PDU form factors that promote efficient use of space in the rack and provide flexibility in how each PDU can be mounted and configured with cables.
- HPE is the only provider of Modular PDUs that can support True OU mounting (between the RETMA rails), minimizing the need to use valuable U space in racks for power distribution.
- HPE PDUs can operate reliably in rear rack temperatures of up to 60°C for extended periods of time, helping to reduce power requirements for rack cooling.

Models

100-120V Input, Single Phase, North America/Japan

HPE G2 Basic 1.9kVA/IEC C20 Detachable 16A/120V Outlets (12) 5-20R/1U Horizontal NA/JP PDU	P9Q31A
HPE G2 Basic 1.9kVA/IEC C20 Detachable 16A/120V Outlets (16) 5-20R/Vertical NA/JP PDU	P9Q32A
HPE G2 Basic Modular 2.8kVA/L5-30P 24A/120V Outlets (6) IEC C19/1U Horizontal NA/JP PDU	P9Q33A
HPE G2 Basic 2.8kVA/L5-30P 24A/120V Outlets (22) 5-20R/Vertical NA/JP PDU	P9Q34A
HPE G2 Basic 2.8kVA/L5-30P 24A/120V Outlets (16) 5-20R/2U Horizontal NA/JP PDU	P9Q35A

NOTE: Models P9Q31A and P9Q32A include a C19 to NEMA 5-15 input power cord.

200-240V Input, Single Phase, Worldwide

HPE G2 Basic Modular 3.6kVA/IEC C20 Detachable 16A/100-240V Outlets (2) C19/1U Horizontal WW PDU	P9Q36A
HPE G2 Basic 3.6kVA/IEC C20 Detachable 16A/100-240V Outlets (12) C13/1U Horizontal WW PDU	P9Q37A
HPE G2 Basic 3.6kVA/IEC C20 Detachable 16A/100-240V Outlets (20) C13 (2) C19/Vertical WW PDU	P9Q38A
HPE G2 Basic 9.2kVA/50A Term Block 40A/208V Outlets (30) C13 (6) C19/Vertical WW PDU	P9Q49A

NOTE: Worldwide models do not include an input power cord. Please go to the Related Options section and select the appropriate input power cord for your geographic location.

200-208V Input, Single Phase, North America/Japan

HPE G2 Basic Modular 4.9kVA/L6-30P 24A/208V Outlets (6) IEC C19/1U Horizontal NA/JP PDU	P9Q39A
HPE G2 Basic 4.9kVA/L6-30P 24A/208V Outlets (12) C13/1U Horizontal NA/JP PDU	P9Q40A
HPE G2 Basic 4.9kVA/L6-30P 24A/208V Outlets (20) C13/Vertical NA/JP PDU	P9Q41A
HPE G2 Basic 4.9kVA/L6-30P 24A/208V Outlets (36) C13 (6) C19/Vertical NA/JP PDU	P9Q42A
HPE G2 Basic Modular 8.3kVA/CS8265C 40A/208V Outlets (6) C19/1U Horizontal NA/JP PDU	P9Q47A
HPE G2 Basic 8.3kVA/CS8265C 40A/208V Outlets (30) C13 (6) C19/Vertical NA/JP PDU	P9Q48A

200-208V Input, Three Phase, North America/Japan

HPE G2 Basic Modular 3Ph 8.6kVA/L15-30P 24A/208V Outlets (6) C19/1U Horizontal NA/JP PDU	P9Q52A
HPE G2 Basic 3Ph 8.6kVA/L15-30P 24A/208V Outlets (18) C13/Vertical NA/JP PDU	P9Q54A
HPE G2 Basic 3Ph 8.6kVA/L21-30P 24A/208V Outlets (24) C13 (3) C19 (3) 5-20R/Vertical NA/JP PDU	P9Q55A
HPE G2 Basic 3Ph 8.6kVA/L15-30P 24A/208V Outlets (30) C13 (6) C19/Vertical NA/JP PDU	P9Q53A
HPE G2 Basic 3Ph 10kVA/CS8365C 28A/208V Outlets (36) C13 (6) C19/Vertical NA/JP PDU	P9Q56A
HPE G2 Basic Modular 3Ph 14.4kVA/CS8365C 40A/208V Outlets (6) C19/1U Horizontal NA/JP PDU	P9Q59A
HPE G2 Basic Modular 3Ph 17.3kVA/60309 60A 4-wire 48A/208V Outlets (6) C19/1U Horizontal NA/JP PDU	P9Q60A
HPE G2 Basic 3Ph 17.3kVA/60309 60A 4-wire 48A/208V Outlets (18) C13 (6) C19/Vertical NA/JP PDU	P9Q61A
HPE G2 Basic 3Ph 17.3kVA/60309 60A 4-wire 48A/208V Outlets (36) C13 (12) C19/Vertical NA/JP PDU	P9Q62A

NOTE: Models P9Q61A and P9Q62A are double-sided models that have circuit breakers on the back side of the unit.

220-240V Input, Single Phase, International

HPE G2 Basic Modular 7.3kVA/60309 3-wire 32A/230V Outlets (6) C19/1U Horizontal INTL PDU	P9Q43A
HPE G2 Basic 7.3kVA/60309 3-wire 32A/230V Outlets (12) C13/1U Horizontal INTL PDU	P9Q44A
HPE G2 Basic 7.3kVA/60309 3-wire 32A/230V Outlets (20) C13/Vertical INTL PDU	P9Q45A
HPE G2 Basic 7.3kVA/60309 3-wire 32A/230V Outlets (36) C13 (6) C19/Vertical INTL PDU	P9Q46A
HPE G2 Basic 11kVA/60309 63A 3-wire 48A/230V Outlets (30) C13 (6) C19/Vertical INTL PDU	P9Q50A
HPE G2 Basic Modular 14.4kVA/60309 63A 3-wire 48A/230V Outlets (6) C19/1U Horizontal INTL PDU	P9Q51A

220-240V Input, Three Phase, International

HPE G2 Basic 3Ph 11kVA/60309 5-wire 16A/230V Outlets (36) C13 (6) C19/Vertical INTL PDU	P9Q58A
HPE G2 Basic Modular 3Ph 11kVA/60309 5-wire 16A/230V Outlets (6) C19/1U Horizontal INTL PDU	P9Q57A
HPE G2 Basic Modular 3Ph 22kVA/60309 5-wire 32A/230V Outlets (6) C19/1U Horizontal INTL PDU	P9Q63A
HPE G2 Basic 3Ph 22kVA/60309 5-wire 32A/230V Outlets (18) C13 (6) C19/Vertical INTL PDU	P9Q64A
HPE G2 Basic 3Ph 22kVA/60309 5-wire 32A/230V Outlets (36) C13 (12) C19/Vertical INTL PDU	P9Q65A

NOTE: Models P9Q64A and P9Q65A are double-sided models that have circuit breakers on the back side of the unit.

Models

unit.

Horizontal Form Factors

1U Horizontal (Non-Modular) – P9Q31A



1U Horizontal (Modular) – P9Q47A



2U Horizontal (Non-Modular) – P9Q35A



Vertical Form Factors

Quarter-Height – P9Q37A




Models


Half-Height – P9Q61A



Mid-Height – P9Q42A

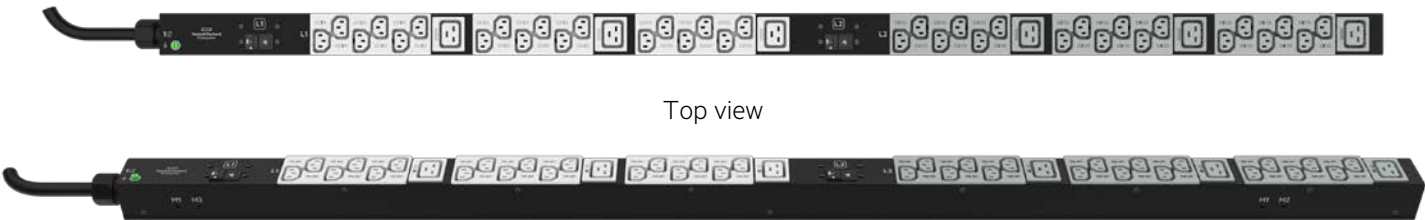


Full-Height – P9Q65A

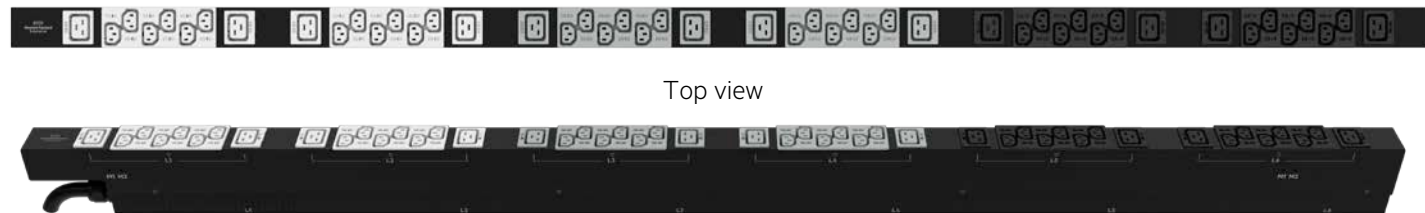

Key Features

Compatibility	<ul style="list-style-type: none">Designed specifically for use with HPE rack enclosures and IT solutions but can work with most 3rd party IT racks
Reliability/Durability	<ul style="list-style-type: none">5-year warranty with free service/support upgrades matching server purchaseHigh reliability at elevated operating temperature levels (up to 60°C)
Usability/Serviceability	<ul style="list-style-type: none">Wide range of mounting options including vertical, 1U/2U horizontal, and True 0UModular PDU options supporting True 0U mounting between the RETMA rails of the rackHigh-density vertical power outlet configurations with up to 48 outlets on a single PDUFull range of single and three phase input and output power capabilities1.9kVA to 22kVA power distribution to meet the needs of both small and large data centersBuilt-in three-sided button mounting system supporting flexible installationsLow-profile PDU form factors providing enhanced IT serviceability in the back of the rackColor coded receptacles and circuit breaker banks to easily identify specific outletsMultiple extension bar options that inexpensively expand outlet configurations
Safety/Security	<ul style="list-style-type: none">Optional dual-locking power cords that secure both power connectionsSupport for integrated individual power cord retention
True 0U Mounting	All HPE Horizontal PDUs can be installed in any U position in your rack. However, HPE 1U Horizontal PDUs have a unique architecture designed specifically for data center customers who want to maximize space efficiencies in the rack. These models can be installed in the 0U space between the RETMA rails on HPE Advanced and Enterprise Series racks (see diagram below)

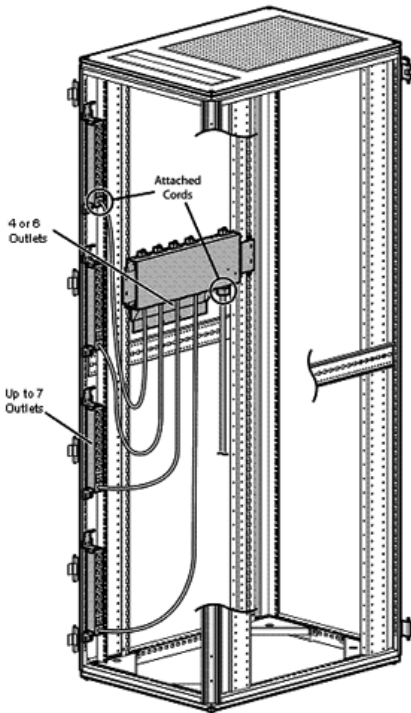

Key Features

Form Factor	extension bars to expand access to power in the back of the rack. Extension Bars mount directly to the frame of the rack in multiple locations allowing you the flexibility of placing access to power where it is needed most (see diagram above). Multiple extension bar options are available to help you customize the outlet configurations you require.
HPE PDU Extension Bar Options	HPE offers multiple PDU extension bar options to help expand the availability of power in the rear of the rack. Each extension bar option supports HPE's new IEC Locking Power Cords (for C13/C14 and C19/C20 outlets) and includes locking support for the input power cord that connects to the PDU (see IEC Locking Power Cords details below). While primarily used with Basic Modular PDU models, extension bars can also be added to Vertical PDU models with available C20 outlets to add additional power outlets when needed. Extension bars are also compatible with previous generation PDU models that offer C20 outlets (locking feature only supported on new G2 PDU models). See the Related Options section for more information on G2 Extension Bar models.
High-Density Vertical PDU Models	New high-density Vertical PDU models have also been added to the new G2 portfolio of HPE PDUs. These models provide 24 outlets in a half-height (22U) form factor and 48 outlets in a full-height (42U) form factor, supporting the highest density available. This density is achieved by placing the power receptacles on one side of the PDU and access to the circuit breakers on the opposite side, all without significantly impacting the height (profile) of the PDU. See the Model Matrix section for more information on high-density Vertical PDU models.
IEC Locking Power Cords	HPE G2 PDU models now support optional IEC Locking Power Cords that provide an integrated locking technology on both ends of the cable. Locking Power Cord are available for both C13/14 and C19/20 power receptacles, include multiple cable length options, and can be purchased in single or six-pack kits. A sample of the new IEC Locking Power Cord has been included with each PDU model that supports either a C13 and/or C19 outlet.
Color-Coded Outlets	All HPE G2 PDU models now included color-coding for outlets. Highly visible from the rear of the rack, color-coding helps to easily and clearly identify outlets to simplify cabling and power phase balancing when configuring and maintaining power for your IT equipment.
Rated for High Operating Temperatures	Increasing IT densities and escalating operating costs have created a need for rack infrastructure that can operate reliably at higher operating temperatures. HPE G2 PDUs have been designed with high temperature-rated premium components and construction that support increased reliability levels at elevated temperatures. All HPE G2 PDUs are rated for operation in temperatures up to 60°C (or 140°F) in the rear of the rack.
5-Year Warranty	HPE G2 Basic PDU models are supported with a 5-year warranty. Additionally, the HPE Foundation Care Extension program provides additional support and services for your PDU models when purchased with HPE servers, storage, and networking solutions at no additional charge.

Additional information regarding worldwide limited warranty and technical support is available at:

<http://h17007.www1.hpe.com/us/en/enterprise/servers/warranty/index.aspx#.V-10xE3rvbq>

Related Options

Related Options

Extension Bars	HPE G2 IEC C20 Input/(8) C13 Expansion Outlets/PDU Extension Bar Kit	P9Q66A
	HPE G2 IEC C20 Input/(4) C13 (2) C19 Expansion Outlets/PDU Extension Bar Kit	P9Q67A
	HPE G2 IEC C20 Input/(7) 5-20R Expansion Outlets/PDU Extension Bar Kit	P9Q68A
	NOTE: All kits include 2 extension bars with 1.8m input power cords and locking C19 power connector.	
IEC Locking Power Cords	HPE C13 - C14 WW 250V 10Amp 0.7m Black Locking Power Cord	Q0P67A
	HPE C13 - C14 WW 250V 10Amp 0.7m Black 6-pack Locking Power Cord	Q0Q02A
	HPE C13 - C14 WW 250V 10Amp 1.4m Black Locking Power Cord	Q0P68A
	HPE C13 - C14 WW 250V 10Amp 1.4m Black 6-pack Locking Power Cord	Q0Q03A
	HPE C13 - C14 WW 250V 10Amp 2m Black Locking Power Cord	Q0P69A
	HPE C13 - C14 WW 250V 10Amp 2m Black 6-pack Locking Power Cord	Q0Q04A
	HPE C13 - C14 WW 250V 10Amp 3m Black Locking Power Cord	Q0P70A
	HPE C13 - C14 WW 250V 10Amp 3m Black 6-pack Locking Power Cord	Q0Q05A
	HPE C19 - C20 WW 250V 16Amp 0.7m Black Locking Power Cord	Q0R19A
	HPE C19 - C20 WW 250V 16Amp 0.7m 6-pack Black Locking Power Cord	Q0R15A
	HPE C19 - C20 WW 250V 16Amp 1.2m Black Locking Power Cord	Q0P71A
	HPE C19 - C20 WW 250V 16Amp 1.2m 6-pack Black Locking Power Cord	Q0R16A
	HPE C19 - C20 WW 250V 16Amp 2m Black Locking Power Cord	Q0P72A
	HPE C19 - C20 WW 250V 16Amp 2m 6-pack Black Locking Power Cord	Q0R17A
	HPE C19 - C20 WW 250V 16Amp 2.5m Black Locking Power Cord	Q0P73A
	HPE C19 - C20 WW 250V 16Amp 2.5m 6-pack Black Locking Power Cord	Q0R18A
	NOTE: HPE Locking Power Cords are only supported on either C13/14 or C19/20 power receptacles using HPE G2 Standard Series Basic PDUs.	
IEC Standard Power Cords	HP C13 - C14 WW 250V 10A Gray 0.7m Jumper Cord	A0K03A
	HP C13 - C14 WW 250V 10Amp 0.7m Jumper Cord	142257-B28
	HP C13 - C14 WW 250V 10Amp 1.4m Jumper Cord	142257-006
	HP C13 - C14 WW 250V 10A Gray 1.37m Jumper Cord	A0K04A
	HP C13 - C14 WW 250V 10Amp 1.4m 15 pc Jumper Cord	142257-007
	HP C13 - C14 WW 250V 10Amp 2.0m Jumper Cord	A0K02A
	HP C13 - C14 WW 250V 10Amp Flint Gray 2.0m Jumper Cord	AF573A
	HP C13 - C14 WW 250V 10Amp 2.5m Jumper Cord	142257-002
	HP C13 - C14 WW 250V 10Amp 3.0m Jumper Cord	142257-003
	HP C13 - C14 WW 250V 10A Gray 3.0m Jumper Cord	A0K06A
	HP C20 - C13 WW 250V 15Amp 2.0m Jumper Cord	AF590A
	HP C19 - C20 WW 250V 16Amp Flint Gray 1.20m Jumper Cord	AF575A
	HP C19 - C20 WW 250V 16Amp Flint Gray 2.0m Jumper Cord	AF574A
	HP C19 - C20 WW 250V 16Amp 2.5m Jumper Cord	295633-B22
	HP 200-250V 10A C15 to C14 .76m Jumper Cable	E7807A
Country-Specific Power Cords	HP C13 - Nema 5-15P US/CA 110V 10Amp 1.83m Power Cord	AF556A
	HP C19 - Nema L6-20P NA/JP 250V 20Amp High Voltage 3.6m Power Cord	AF593A
	HP C19 - NBR-14136 BR 250V 16Amp 2.5m Power Cord	AF592A
	HP C19 - GB-1002 CN 250V 16Amp 2.5m Power Cord	AF584A
	HP C19 - IS-1293 IN/PK/BD 250V 16Amp 2.5m Power Cord	AF582A

Related Options

HP C19 - ISI-32 IL 250V 16Amp 2.5m Power Cord	AF583A
HP C19 - AS3112-3 AU/NZ 250V 15Amp 3.6m Power Cord	AF577A
HP C19 - IEC-309 DK/SE/AR 250V 16Amp 3.6m Power Cord	AF581A
HP C19 - CEE-VII EU 250V 16Amp 3.6m Power Cord	AF576A
HP C19 - CEI-23-50 IT/CL 250V 16Amp 3.6m Power Cord	AF580A
HP C19 - SABS-164 ZA 250V 16Amp 3.6m Power Cord	AF579A
HP C19 - BS-1363/A UK/HK/SG 250V 13Amp 3.6m Power Cord	359615-031
HP 240 VAC 4.5M Unterminated End NA Power Cord	E7806A

HPE Mounting
Brackets

HPE Vertical PDU 10K G2 Mounting Kit	H6L32A
NOTE: This kit allows for HPE G2 Basic PDU vertical models to be mounted in HPE 10000 G2 series racks and in the HPE Standard Series rack. This bracket is not needed for mounting in the HPE Advanced or Enterprise Series racks.	

Model Matrix – Form Factor/Mounting Options

Mounting options for Horizontal 1U and 2U PDU models					
Model	W x H x D	Unit Weight	U Height	Horizontal Mounting	True OU Mounting
P9Q31A	17.461 x 1.633 x 2.087 in	2.2 lbs.	1U	✓	✓
P9Q33A	17.461 x 1.713 x 7.772 in	9.3 lbs.	1U	✓	✓
P9Q35A	17.461 x 3.425 x 1.713 in	10.2 lbs.	2U	✓	n/a
P9Q36A	17.461 x 1.633 x 2.087 in	2.0 lbs.	1U	✓	✓
P9Q37A	17.461 x 1.633 x 2.087 in	2.2 lbs.	1U	✓	✓
P9Q39A	17.461 x 1.713 x 7.772 in	9.8 lbs.	1U	✓	✓
P9Q40A	17.461 x 1.713 x 7.772 in	10.2 lbs.	1U	✓	✓
P9Q43A	17.461 x 1.713 x 7.772 in	9.3 lbs.	1U	✓	✓
P9Q44A	17.461 x 1.713 x 7.772 in	9.2 lbs.	1U	✓	✓
P9Q47A	17.461 x 1.713 x 7.772 in	12.1 lbs.	1U	✓	✓
P9Q51A	17.461 x 1.713 x 7.772 in	12.6 lbs.	1U	✓	✓
P9Q52A	17.461 x 1.713 x 7.772 in	9.5 lbs.	1U	✓	✓
P9Q57A	17.461 x 1.633 x 2.087 in	5.1 lbs.	1U	✓	✓
P9Q59A	17.461 x 1.713 x 7.772 in	12.1 lbs.	1U	✓	✓
P9Q60A	17.461 x 1.713 x 7.772 in	19.6 lbs.	1U	✓	✓
P9Q63A	17.461 x 1.713 x 7.772 in	10.6 lbs.	1U	✓	✓

Mounting options for Vertical PDU models in HPE Advanced and Enterprise racks (1075mm depth)							
Model	W x H x D	Unit Weight	Vertical Height	Maximum PDUs Supported			
				22U	36U	42U	48U
P9Q31A	17.461 x 1.633 x 2.087 in	2.2 lbs.	Quarter-Height	2	2	6	6
P9Q32A	2.047 x 32.165 x 2.087 in	4.4 lbs.	Half-Height	2	2	4	4
P9Q34A	2.047 x 32.165 x 2.087 in	8.4 lbs.	Half-Height	2	2	4	4
P9Q36A	17.461 x 1.633 x 2.087 in	2.0 lbs.	Quarter-Height	2	2	6	6
P9Q37A	17.461 x 1.633 x 2.087 in	2.2 lbs.	Quarter-Height	2	2	6	6
P9Q38A	2.047 x 32.165 x 2.087 in	4.5 lbs.	Half-Height	2	2	4	4
P9Q41A	2.047 x 32.165 x 2.087 in	8.3 lbs.	Half-Height	2	2	4	4
P9Q42A	2.047 x 58.661 x 2.087 in	12.5 lbs.	Mid-Height	n/a	n/a	2	2
P9Q45A	2.047 x 32.165 x 2.087 in	8.1 lbs.	Half-Height	2	2	4	4
P9Q46A	2.047 x 58.661 x 2.087 in	12.0 lbs.	Mid-Height	n/a	2	2	2
P9Q48A	2.047 x 58.661 x 2.087 in	13.2 lbs.	Mid-Height	n/a	2	2	2
P9Q49A	2.047 x 58.661 x 2.087 in	8.6 lbs.	Mid-Height	n/a	2	2	2
P9Q50A	2.047 x 58.661 x 2.087 in	14.7 lbs.	Mid-Height	n/a	2	2	2
P9Q53A	2.047 x 58.661 x 2.087 in	13.5 lbs.	Mid-Height	n/a	2	2	2
P9Q54A	2.047 x 32.165 x 2.087 in	9.3 lbs.	Half-Height	n/a	2	4	4
P9Q55A	2.047 x 58.661 x 2.087 in	14.0 lbs.	Mid-Height	n/a	2	2	2
P9Q56A	2.047 x 68.898 x 2.087 in	17.4 lbs.	Full-Height	n/a	n/a	2	2
P9Q57A	17.461 x 1.633 x 2.087 in	5.1 lbs.	Quarter-Height	2	2	6	6
P9Q58A	2.047 x 58.661 x 2.087 in	9.9 lbs.	Mid-Height	n/a	2	2	2
P9Q61A*	2.047 x 36.024 x 4.409 in	21.2 lbs.	Half-Height	1	1	2	2
P9Q62A*	2.047 x 71.654 x 4.409 in	27.1 lbs.	Full-Height	n/a	n/a	1	1
P9Q64A*	2.047 x 36.024 x 4.409 in	14.5 lbs.	Half-Height	1	1	2	2
P9Q65A*	2.047 x 71.654 x 4.409 in	20.2 lbs.	Full-Height	n/a	n/a	1	1

Model Matrix – Input Power

NOTE: HPE G2 Advanced and Enterprise 1200mm deep racks include an extra set (2) of PDU trays in the rear of the rack enabling support of up to 2x the number of PDUs listed above for 1075mm deep racks.

Model	Region	Power Phasing	Input Voltage Range	Input Circuit	Circuit Breakers	Input Plug Type	Input Cord Length
P9Q31A	NA/JP	Single	100 - 120V	16A	None	5-15P	12' (Detachable)
P9Q32A	NA/JP	Single	100 - 120V	16A	None	5-15P	12' (Detachable)
P9Q33A	NA/JP	Single	100 - 120V	24A	(2) 1-pole, 20A	L5-30P	12'
P9Q34A	NA/JP	Single	100 - 120V	24A	(2) 1-pole, 20A	L5-30P	10'
P9Q35A	NA/JP	Single	100 - 120V	24A	(2) 1-pole, 20A	L5-30P	12'
P9Q36A	WW	Single	100 - 240V	16A	None	C20 Inlet	Detachable
P9Q37A	WW	Single	100 - 240V	16A	None	C20 Inlet	Detachable
P9Q38A	WW	Single	100 - 240V	16A	None	C20 Inlet	Detachable
P9Q39A	NA/JP	Single	200 - 208V	24A	(2) 2-pole 20A	L6-30P	12'
P9Q40A	NA/JP	Single	200 - 208V	24A	(2) 2-pole 20A	L6-30P	12'
P9Q41A	NA/JP	Single	200 - 208V	24A	(2) 2-pole 20A	L6-30P	10'
P9Q42A	NA/JP	Single	200 - 208V	24A	(2) 2-pole 20A	L6-30P	10'
P9Q43A	INTL	Single	220 - 240V	32A	(2) 1-pole, 16A	IEC 32A, 1ph	12'
P9Q44A	INTL	Single	220 - 240V	32A	(2) 1-pole, 16A	IEC 32A, 1ph	12'
P9Q45A	INTL	Single	220 - 240V	32A	(2) 1-pole, 16A	IEC 32A, 1ph	10'
P9Q46A	INTL	Single	220 - 240V	32A	(2) 1-pole, 16A	IEC 32A, 1ph	10'
P9Q47A	NA/JP	Single	200 - 208V	40A	(3) 2-pole 20A	CS8265C	12'
P9Q48A	NA/JP	Single	200 - 208V	40A	(3) 2-pole 20A	CS8265C	10'
P9Q49A	WW	Single	200 - 208V	40A	(3) 2-pole 20A	50A Terminal Block	Detachable
P9Q50A	INTL	Single	220 - 240V	48A	(3) 1-pole, 16A	IEC 63A, 1ph	10'
P9Q51A	INTL	Single	220 - 240V	63A	(6) 1-pole 16A	IEC 63A, 1ph	12'
P9Q52A	NA/JP	Three	200 - 208V	24A	(3) 2-pole 20A	L15-30P	12'
P9Q53A	NA/JP	Three	200 - 208V	24A	(3) 2-pole 20A	L15-30P	10'
P9Q54A	NA/JP	Three	200 - 208V	24A	(3) 2-pole 20A	L15-30P	10'
P9Q55A	NA/JP	Three	120/208V	24A	(3) 2-pole 20A	L21-30P	10'
P9Q56A	NA/JP	Three	200 - 208V	28A	(3) 2-pole 20A	CS8365C	10'
P9Q57A	INTL	Three	200 - 240V/346 - 415V	16A	None	IEC 16A, 3ph	12'
P9Q58A	INTL	Three	200 - 240V/346 - 415V	16A	None	IEC 16A, 3ph	10'
P9Q59A	NA/JP	Three	200 - 208V	40A	(6) 2-pole 20A	CS8365C	12'
P9Q60A	NA/JP	Three	200 - 208V	48A	(6) 2-pole 20A	IEC 60A, 3ph	12'
P9Q61A	NA/JP	Three	200 - 208V	48A	(6) 2-pole 20A	IEC 60A, 3ph	10'
P9Q62A	NA/JP	Three	200 - 208V	48A	(6) 2-pole 20A	IEC 60A, 3ph	10'
P9Q63A	INTL	Three	200 - 240V/346 - 415V	32A	(6) 1-pole, 16A	IEC 32A, 3ph	12'
P9Q64A	INTL	Three	200 - 240V/346 - 415V	32A	(6) 1-pole, 16A	IEC 32A, 3ph	10'
P9Q65A	INTL	Three	200 - 240V/346 - 415V	32A	(6) 1-pole, 16A	IEC 32A, 3ph	10'

NOTE: All Input Circuit Ratings for NA/JP models have been de-rated according to NEC requirements.

Model Matrix – Input Power

Nominal Input Voltage Ratings used for calculating output power are as follows:

- 100 – 120V: 120V
- 200 – 208V: 208V
- 100 – 240V: 230V
- 220 – 240V: 230V
- 200 – 240V/346 – 415V: 230V

Model Matrix – Output Power

Model	Region	Nominal Power (kVA)	Output Voltage Range	Output Receptacles	Support Extension Bar Options	Support Locking Power Cord Options
P9Q31A	NA/JP	1.9	100-125V	(12)5-20R	n/a	n/a
P9Q32A	NA/JP	1.9	100-125V	(16)5-20R	n/a	n/a
P9Q33A	NA/JP	2.8	100-125V	(6)C19	✓	✓
P9Q34A	NA/JP	2.8	100-125V	(22)5-20R	n/a	n/a
P9Q35A	NA/JP	2.8	100-125V	(16)5-20R	n/a	n/a
P9Q36A	WW	3.6	100-240V	(2)C19	✓	✓
P9Q37A	WW	3.6	100-240V	(12)C13	n/a	✓
P9Q38A	WW	3.6	100-240V	(20)C12, (2)C19	✓	✓
P9Q39A	NA/JP	4.9	200-240V	(6)C19	✓	✓
P9Q40A	NA/JP	4.9	200-240V	(12)C13	n/a	✓
P9Q41A	NA/JP	4.9	200-240V	(20)C13	n/a	✓
P9Q42A	NA/JP	4.9	200-240V	(36)C13, (6)C19	✓	✓
P9Q43A	INTL	7.3	220-240V	(6)C19	✓	✓
P9Q44A	INTL	7.3	220-240V	(12)C13	n/a	✓
P9Q45A	INTL	7.3	220-240V	(20)C13	n/a	✓
P9Q46A	INTL	7.3	220-240V	(36)C13, (6)C19	✓	✓
P9Q47A	NA/JP	8.3	200-240V	(6)C19	✓	✓
P9Q48A	NA/JP	8.3	200-240V	(30)C13, (6)C19	✓	✓
P9Q49A	WW	9.2	200-240V	(30)C13, (6)C19	✓	✓
P9Q50A	INTL	11	220-240V	(30)C13, (6)C19	✓	✓
P9Q51A	INTL	14.4	220-240V	(6)C19	✓	✓
P9Q52A	NA/JP	8.6	200-240V	(6)C19	✓	✓
P9Q53A	NA/JP	8.6	200-240V	(30)C13, (6)C19	✓	✓
P9Q54A	NA/JP	8.6	200-240V	(18)C13	n/a	✓
P9Q55A	NA/JP	8.6	120/208V	(24)C13, (3)C19, (3)5-20R	✓	✓
P9Q56A	NA/JP	10	200-240V	(36)C13, (6)C19	✓	✓
P9Q57A	INTL	11	220-240V	(6)C19	✓	✓
P9Q58A	INTL	11	220-240V	(36)C13, (6)C19	✓	✓
P9Q59A	NA/JP	14.4	200-240V	(6)C19	✓	✓
P9Q60A	NA/JP	17.3	200-240V	(6)C19	✓	✓
P9Q61A	NA/JP	17.3	200-240V	(18)C13, (6)C19	✓	✓
P9Q62A	NA/JP	17.3	200-240V	(36)C13, (12)C19	✓	✓
P9Q63A	INTL	22	220-240V	(6)C19	✓	✓
P9Q64A	INTL	22	220-240V	(18)C13, (6)C19	✓	✓
P9Q65A	INTL	22	220-240V	(36)C13, (12)C19	✓	✓

NOTE: For more information on Extension Bar and Power Cord options, please see the Related Options section.

PDU Plugs

Voltage	Amps	# Wires	Plug Name	Sample Plug Image (color may vary by manufacturer)	
100-125 V Single Phase	15 A	3	NEMA 5-15P		
	30 A	3	NEMA L5-30P		
200-240 V Single Phase	20 A	3	IEC C20		
	30 A	3	NEMA L6-30P		
	32 A	3	IEC 309 32A		
	50 A	3	CS8265C		
	63 A	3	IEC 309 63A		
200 - 208 V NA/JPN Three Phase	30 A	5	NEMA L15-30P		
	30 A	5	NEMA L21-30P		
	50 A	4	CS8365C		
	60 A	4	IEC 309 60A		
200 - 240 V 400 - 415 V INTL Three Phase	16 A	5	IEC 309 16 A		
	32 A	5	IEC 309 32 A		

Technical Specifications

Operating Temperature	50° to 140° F (10° to 60° C)
Operating Relative Humidity (%)	10% to 90%
Operating Elevation	0 to 10,000 ft. (0 to 3000 m)
Storage Temperature	-4° to 140° F (-20° to 60° C)
Storage Relative Humidity (%)	5% to 95%
Storage Elevation	0 to 30,000 ft. (0 to 9144 m)
Conformance Standards	UL or CSA, CB Test - NA/JPN models CE, DEMKO, KC, EAC - INTL models UL or CSA, CB Test+CE, DEMKO, KC, EAC - WW models
Kit Contents	All G2 Basic PDU models ship with: <ul style="list-style-type: none">• Mounting brackets/hardware• Tie wraps• Locking Power Cord Sample (for models with either C13 and/or C19 outlets)• Read me first card

Environment-friendly Products and Approach	End-of-life Management and Recycling	<p>Hewlett Packard Enterprise offers end-of-life product return, trade-in, and recycling programs, in many geographic areas, for our products. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.</p> <p>http://www8.hp.com/us/en/hpe/hp-information/livingprogress/environmentalprogress/product-recycling.html#.V-IPA_krKiM</p> <p>The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.</p> <p>http://www8.hp.com/us/en/hpe/hp-information/livingprogress/environmentalprogress/product-recycling.html#.V-IPA_krKiM</p>
--	--------------------------------------	---

Summary of Changes

Date	Version History	Action	Description of Change
28-Nov-2016	Version 1	Added	New QuickSpecs.



Sign up for updates



© Copyright 2016 Hewlett Packard Enterprise Development Company, L.P.
The information contained herein is subject to change without notice.

The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

c05324691 - 15755 - Worldwide - V1 - 28-November-2016