

Power distribution units for Universal V2 Rack

Open this article in PDF: [Universal_V2_Rack_Reference_Guide_MK-97RK000-01.pdf](#)

The Hitachi Universal V2 Rack is equipped with specific power distribution units (PDU) for Americas, APAC, and EMEA regions. The PDUs can provide electrical power to the storage system in a single-phase or three-phase configuration.


Caution

- Before installing third-party devices into the rack, check the electrical current draw of each device. Verify the electrical specifications and allowable current load on each PDU before plugging the device into the PDU.
- Balance the electrical current load between available PDUs.

Americas single-phase PDU 1P30A-8C13-3C19UL.P

The following figure and table describes the specifications of the PDU.

Figure 1: Americas PDU for the Hitachi Universal V2 Rack (Single-phase PDU 1P30A-8C13-3C19UL.P)

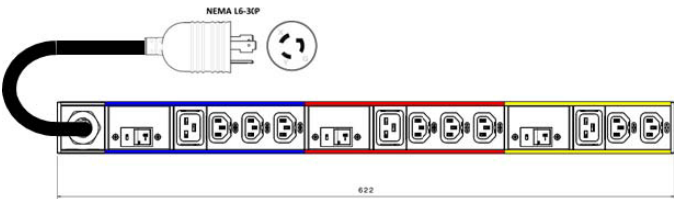


Part Number	Region	Phase	Description
1P30A-8C13-3C19UL.P	Americas	Single	• 208V, 30A (24A rated) 60Hz • 8 IEC C13 + 3 IEC C19 sockets • NEMA L6-30P input power plug

Part Number	Region	Phase	Description
			4.5 m (14.76 feet) cable

Americas single-phase PDU 1P30A-15C13-3C19UL.P

The following figure and table describes the specifications of the PDU.

Figure 1: Americas PDU for the Hitachi Universal V2 Rack (Single-phase PDU 1P30A-15C13-3C19UL.P)

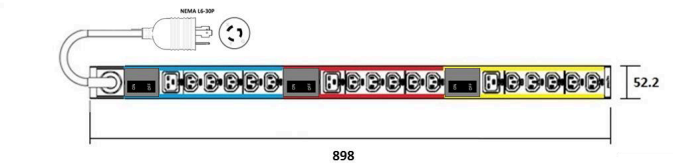


Part Number	Region	Phase	Description
1P30A-15C13-3C19UL.P	Americas	Single	208V, 30A (24A rated) 60Hz 15 IEC C13 + 3 IEC C19 sockets - NEMA L6-30P input power plug 4.5 m (14.76 feet) cable

Americas three-phase PDU 3P30A-8C13-3C19UL.P

The following figure and table describes the specifications of the PDU.

Figure 1: Americas PDU for the Hitachi Universal V2 Rack (Three-phase PDU 3P30A-8C13-3C19UL.P)

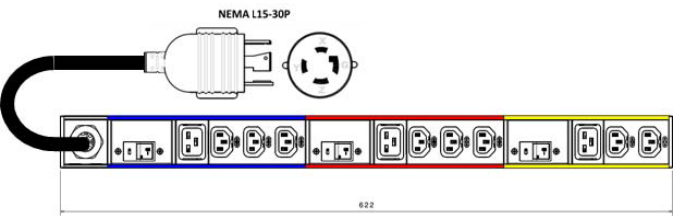


Part Number	Region	Phase	Description
3P30A-8C13-3C19UL.P	Americas	Three	• 208V 3P, 30A (24A rated) 60Hz • 8 IEC C13 + 3 IEC C19 sockets • NEMA L15-30P input power plug • 4.5 m (14.76 feet) cable

[Americas three-phase PDU 3P30A-15C13-3C19UL.P](#)

The following figure and table describes the specifications of the PDU.

Figure 1: Americas PDU for the Hitachi Universal V2 Rack (Three-phase PDU 3P30A-15C13-3C19UL.P)

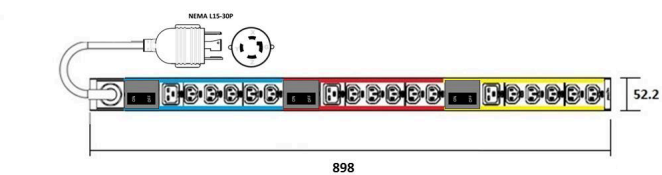


Part Number	Region	Phase	Description
3P30A-15C13-3C19UL.P	Americas	Three	• 208V 3P, 30A (24A rated) 60Hz • 15 IEC C13 + 3 IEC C19 sockets • NEMA L15-30P input power plug • 4.5 m (14.76 feet) cable

Americas three-phase PDU 3P30A-24C13-6C19UL.P

The following figure and table describes the specifications of the PDU.

Figure 1: Americas PDU for the Hitachi Universal V2 Rack (Three-phase PDU 3P30A-24C13-6C19UL.P)

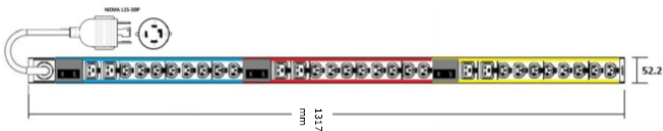


Part Number	Region	Phase	Description
3P30A-24C13-6C19UL.P	Americas	Three	• 208V 3P, 30A (24A rated) 60Hz • 24 IEC C13 + 6 IEC C19 sockets • NEMA L15-30P input power plug • 4.5 m (14.76 feet) cable

[APAC and EMEA single-phase PDU 1P32A-9C13-3C19CE.P](#)

The following figure and table describes the specifications of the PDU.

Figure 1: APAC and EMEA PDU for the Hitachi Universal V2 Rack (Single-phase 1P32A-9C13-3C19CE.P)

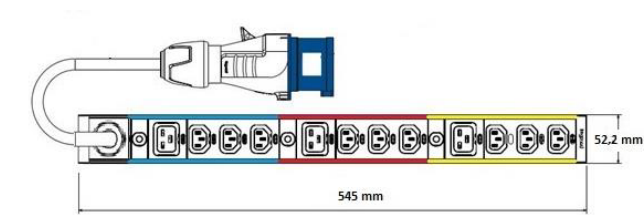


Part Number	Region	Phase	Description
1P32A-9C13-3C19CE.P	APAC and EMEA	Single	• 230V max. 32A 50Hz / 60Hz • 9 IEC C13 + 3 IEC C19 sockets • IEC309 Blue 2P + E input power plug • 4.5 m (14.76 feet) cable

[APAC and EMEA single-phase PDU 1P32A-18C13-3C19CE.P](#)

The following figure and table describes the specifications of the PDU.

Figure 1: APAC and EMEA PDU for the Hitachi Universal V2 Rack (Single-phase 1P32A-18C13-3C19CE.P)

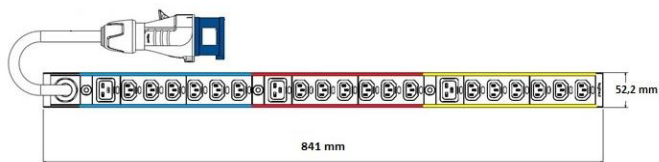


Part Number	Region	Phase	Description
1P32A-18C13-3C19CE.P	APAC and EMEA	Single	• 230V max. 32A 50Hz / 60Hz • 18 IEC C13 + 3 IEC C19 sockets • IEC309 Blue 2P + E input power plug • 4.5 m (14.76 feet) cable

APAC and EMEA three-phase PDU 3P16A-9C13-3C19CE.P

The following figure and table describes the specifications of the PDU.

Figure 1: APAC and EMEA PDU for the Hitachi Universal V2 Rack (Three-phase 3P16A-9C13-3C19CE.P)

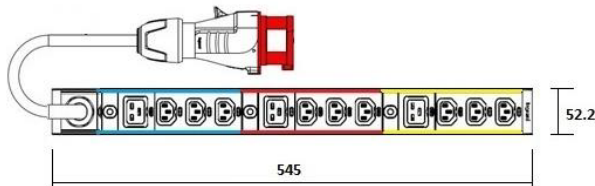


Part Number	Region	Phase	Description
3P16A-9C13-3C19CE.P	APAC and EMEA	Three	

Part Number	Region	Phase	Description
			• 400V max. 3x 16A 50Hz / 60Hz • 9 IEC C13 + 3 IEC C19 sockets • IEC309 Red 3P + N + E input power plug • 4.5 m (14.76 feet) cable

APAC and EMEA three-phase PDU 3P16A-15C13-3C19CE.P

The following figure and table describes the specifications of the PDU.

Figure 1: APAC and EMEA PDU for the Hitachi Universal V2 Rack (Three-phase 3P16A-15C13-3C19CE.P)

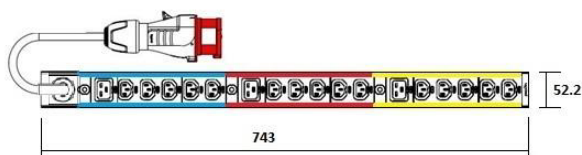


Part Number	Region	Phase	Description
3P16A-15C13-3C19CE.P	APAC and EMEA	Three	• 400V max. 3x 16A 50Hz / 60Hz • 15 IEC C13 + 3 IEC C19 sockets • IEC309 Red 3P + N + E input power plug • 4.5 m (14.76 feet) cable

APAC and EMEA three-phase PDU 3P32A-24C13-6C19CE.P

The following figure and table describes the specifications of the PDU.

Figure 1: APAC and EMEA PDU for the Hitachi Universal V2 Rack (Three-phase 3P32A-24C13-6C19CE.P)

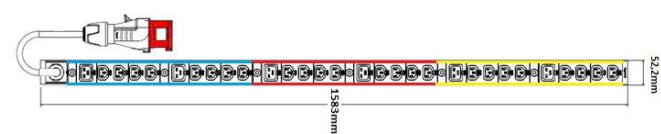

Part Number	Region	Phase	Description
3P32A-24C13-6C19CE.P	APAC and EMEA	Three	• 400V max. 3x 32A 50Hz / 60Hz • 24 IEC C13 + 6 IEC C19 sockets • IEC309 Red 3P + N + E input power plug • 4.5 m (14.76 feet) cable