



- ACCOMMODATE WORLDWIDE SOURCES
- LOW COST GAMES USE POWER SUPPLY
- EMI MEET CISPR PUB. 22 & FCC CLASS B
- LED 5V INDICATION
- MEET UNIVERSAL SAFETY STANDARDS
- CE MARKING COMPLIANCE



OUTPUT VOLTAGE / CURRENT RATINGS CHART


TRIPLE OUTPUT

MODEL NO	MAIN +VO1 ★@#		AUX. ± VO2 ■		AUX. -VO3 ■	
	Typ.	Volt.	Typ.	Volt.	Typ.	Volt.
HIA105-30	5.0A	+5.0V	1.0A	-5.0V	1.8A	-48.0V
HIA105-31	13.0A	+5.0V	2.5A	+12.0V	0.5A	-12.0V
HIA105-32	13.0A	+5.0V	1.3A	+24.0V	0.5A	-12.0V
HIA105-33	13.0A	+5.0V	2.0A	+15.0V	0.5A	-15.0V

Symbol: "★" OVP built-in. "@@" Adjustable. "■" Couple choke. "#" Remote sensing.

MECHANICAL DIMENSIONS: MM [INCHES]

WEIGHT: 770.0g (27.11 Oz.)

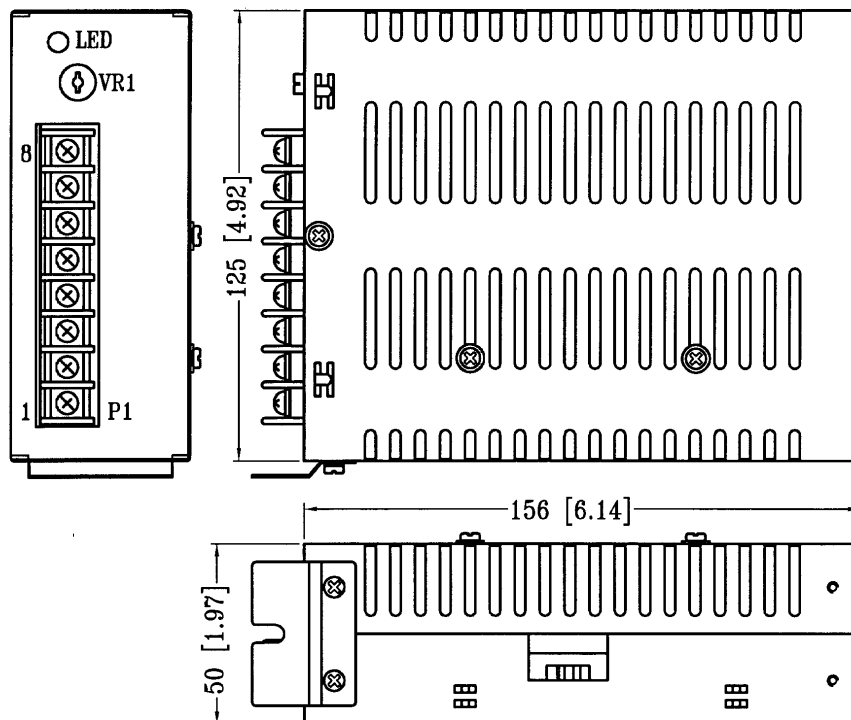

INPUT & OUTPUT CONNECTOR PIN ASSIGNMENT

ASSIGNMENT CNTR & PIN#	AC INPUT			TRIPLE OUTPUT			
	AC-LINE	AC-NEUTRAL	AC-GRAND	+VO1	DC COM	+VO2	-VO3
	P1-1 (L)	P1-2 (N)	P1-3 (G)	P1-4	P1-5, 6	P1-7	P1-8