



- **ACCOMMODATE UNIVERSAL AC SOURCES**
- **MEET IEC 61000-3-2 HARMONIC CORRECTION**
- **MEET UNIVERSAL SAFETY STANDARDS**
- **19" COMPATIBLE EUROCARD FORMAT**
- **EMI MEET EN 55022 & FCC CLASS B**
- **CE MARKING COMPLIANCE**
- **3U X 10HP X 160MM VMEbus STANDARD**

SPECIFICATION

INPUT SPECIFICATION

Input Voltage: Typ. 90-264Vac with PFC.
Input Connector: DIN 16112 at rear.
Input Frequency: 47-63Hz.
Inrush Current: Typ. <30.6A @ 230Vac.
Input Current: 1.0A @ 115Vac, 0.5A @ 230Vac.
Dielectric Withstand: Meet IEC 60950-1.
EMI: Meet EN 55022 & FCC B.
Power Factor Correction: Meet Harmonic Correction
IEC 61000-3-2 .PF typ. 0.97-0.98.
Power Indicator: Green LED.
Power OK Signal: Installed.
Logic Inhibit: Installed.
Hold-up Time: 20mS @ 115Vac & 230Vac.
Earth Leakage: Less than 0.40mA @ 230Vac.

OUTPUT SPECIFICATION

Output Voltage: See Ratings Chart.

Output Current: See Ratings Chart.

Output Connector: DIN 41612 at rear.

Line Regulation: Typ. 0.5%.

Load Regulation: Main VO1 typ. $\pm 1\text{--}2.0\%$.
Aux. VO2 typ. $\pm 2.0\%$ (Mag. Amp.)
Aux. VO3 typ. $\pm 3.0\%$ (PR).

Noise & Ripple: Typ. 1% peak to peak.

OVP: Built-in at main VO1.

Adjustability: Available at VO1 & VO2.

Overload Protection (OLP): Fully protected against
output overload and short circuit.
Consult the factory for OLP setting.

GENERAL SPECIFICATION

Efficiency: Typ. 73-76%.
Switching Frequency: Fixed frequency 83K Hz.
Circuit Topology: Fixed frequency forward circuit.
Transient Response: Output voltage returns
in less than 3mS following
a 25% load change.
Safety Standard: IEC 60950-1/UL 60950-1 Class I.
Power Density: 2.0 Watt / Cubic Inch.

Operating Temperature: 0 to +50°C full load. Derates from +50 to +70°C by derating 2%/°C.

Storage Temperature: -25 to +85°C.

Temperature Coefficient: Typ. 0.04%/°C.

Cooling: Forced air flow is recommended for Ta > +50°C full load operation.

Construction format: 10HP(TE) X3UX160mm VMEbus standard Eurocard format.

Note: Due to requests in market and advances in technology, specifications subject to change without notification.



In application

OUTPUT VOLTAGE / CURRENT RATINGS CHART

SINGLE OUTPUT

MODEL NO.	MAIN VO1 ★@# Typ. Volt.
HPU100-S033250	25.0A 3.3V
HPU100-S050200 (HPU100-10)	20.0A 5.0V
HPU100-S120080	8.0A 12.0V
HPU100-S150075	7.5A 15.0V
HPU100-S240042 (HPU100-13)	4.2A 24.0V
HPU100-S280036	3.6A 28.0V
HPU100-S360028	2.8A 36.0V
HPU100-S480021	2.1A 48.0V

DUAL OUTPUT

MODEL NO.	MAIN VO1 ★@◇ Typ. Volt.	AUX. VO2 @▲◇ Typ. Volt.
HPU100-D050I (HPU100-20)	8.0A 5.0V	5.0A 12.0V
HPU100-D120I (HPU100-21)	4.2A 12.0V	4.2A 12.0V
HPU100-D050K	8.0A 5.0V	4.0A 15.0V
HPU100-D150K (HPU100-23)	3.4A 15.0V	3.4A 15.0V
HPU100-D033I	11.0A 3.3V	5.0A 12.0V
HPU100-D033K	11.0A 3.3V	4.0A 15.0V

TRIPLE OUTPUT


MODEL NO.	MAIN VO1 ★@◇ Typ. Volt.	AUX. VO2 @▲◇ Typ. Volt.	AUX. VO3 ●◇ Typ. Volt.
HPU100-T050IE	7.0A 5.0V	5.0A 12.0V	1.0A 5.0V
HPU100-T050KK (HPU100-31)	7.0A 5.0V	4.0A 15.0V	0.4A 15.0V
HPU100-T050II (HPU100-32)	7.0A 5.0V	5.0A 12.0V	0.5A 12.0V
HPU100-T033EI	11.0A 3.3V	9.0A 5.0V	1.0A 12.0V
HPU100-T033KK	10.0A 3.3V	4.0A 15.0V	0.6A 15.0V
HPU100-T033II	10.0A 3.3V	5.0A 12.0V	0.8A 12.0V

Symbol: "★" OVP built-in. "@" Adjustable. "#" Remote sensing. "▲" Magnetic Amplifier.

"◇" Floating (or isolated) output. "●" Installed with Post Regulator.

MECHANICAL DIMENSIONS: MM [INCHES]

WEIGHT: 920.0g (32.5 Oz.)

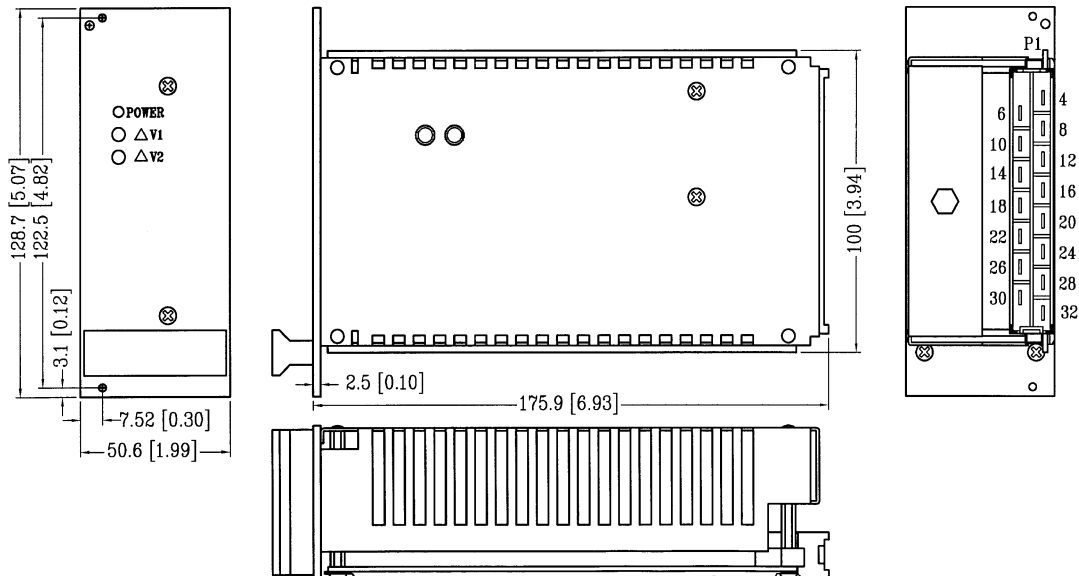

INPUT & OUTPUT CONNECTORS PIN ASSIGNMENT

	AC INPUT			SINGLE OUTPUT					DUAL OUTPUT					TRIPLE OUTPUT							Status/ Control	
ASSIGNMENT	AC-L	AC-N	AC-G	+VO1	+S	-VO1	-S	NC	+VO1	-VO1	+VO2	-VO2	NC	+VO1	-VO1	+VO2	-VO2	+VO3	-VO3	NC	Log. Inh.	P.Ok
CNTR & Pin#	28	30	32	4,6	8	12,14	10	16,18,24,26	4	6	8	10	12,14,16,18,24,26	4,6	8,10	12	14	16	18	24,26	20	22

Mating connector: DIN 41612-H15 Female