

### Features

- Simple conversion of  $V_{DD}$  to  $-V_{DD}$
- Cascade connection (two devices are connected,  $V_{OUT} = -2V_{DD}$ )
- Boost pin for higher switching frequency
- Easy to use
  - Requires only two external capacitors
- No external diode required
- Typically with no load voltage conversion, 99.9% efficiency
- Typical power efficiency is 98%
- Wide operating voltage range: 3V to 12V
- 8-pin SOP package

### General Description


HT7660 is a monolithic CMOS switched-capacitor voltage converter. HT7660 is designed to complete a voltage conversion from positive to negative. The only required external components are two low cost electrolytic capacitors.

HT7660 includes a voltage regulator, an RC oscillator and four output power MOS switches. The frequency of an RC oscillator can be lowered by adding an external capacitor between  $V_{DD}$  and the OSC pin, or an external clock can be connected to the OSC pin to replace the original oscillator. The LV terminal may be tied to  $V_{SS}$  to disable the voltage regulator. By doing this, low voltage operation can be improved.


### Applications

- RS-232 power supply
- On board negative supply for dynamic RAMS
- Supply voltage splitter,  $V_O = \pm V_{DD}/2$
- Operation amplifier supply
- Data acquisition systems
- Positive voltage doubler

### Block Diagram

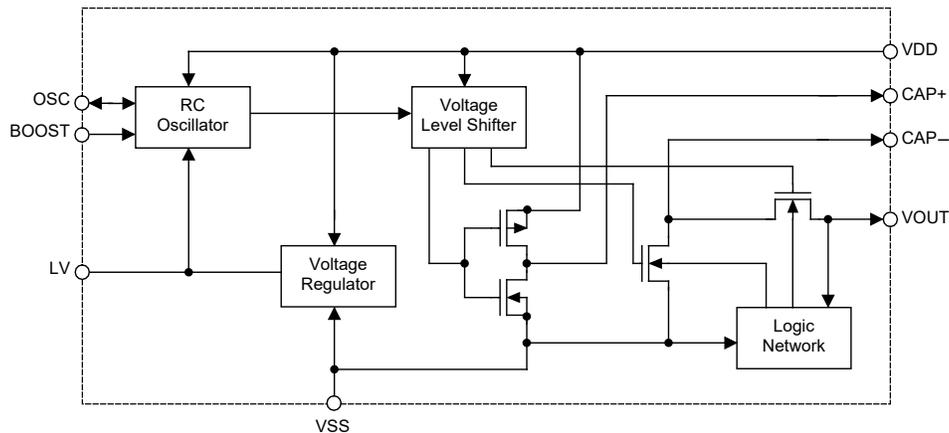

## Pin Assignment

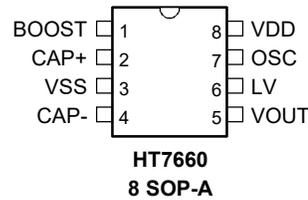

## Pin Descriptions

Pin No.	Pin Name	I/O	Internal Connection	Description
1	BOOST	I	CMOS Pull-low	Higher switching frequency selection input
2	CAP+	O	CMOS	This pin is connected to the positive terminal of Capacitor C1 for a charge pump
3	VSS	—	—	Negative power supply, ground
4	CAP-	O	NMOS	This pin is connected to the negative terminal of Capacitor C1 for a charge pump
5	VOUT	O	NMOS	This pin is connected to the negative terminal of Capacitor C2 for charge reservoir. Output voltage pass through this pin
6	LV	I	—	Floating this pin enables the voltage regulator. Connect this pin to VSS (Ground) to bypass voltage regulator and improve low voltage operation
7	OSC	I/O	Transmission Gate	External clock input pin. This pin can be connected with an external capacitor to reduce switching frequency
8	VDD	—	—	Positive power supply

## Absolute Maximum Ratings

Supply Voltage .....  $V_{SS}-0.3V$  to  $V_{SS}+13V$       Operating Temperature .....  $-40^{\circ}C$  to  $85^{\circ}C$   
 Storage Temperature .....  $-60^{\circ}C$  to  $150^{\circ}C$

Note: These are stress ratings only. Stresses exceeding the range specified under "Absolute Maximum Ratings" may cause substantial damage to the device. Functional operation of this device at other conditions beyond those listed in the specification is not implied and prolonged exposure to extreme conditions may affect device reliability.

## Electrical Characteristics

Ta=25°C

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
		V <sub>DD</sub>	Conditions				
V <sub>DD</sub>	Operating Voltage	—	—	3	—	12	V
I <sub>STB</sub>	Standby Current	3V	No load	—	26	100	μA
		5V		—	80	160	
f <sub>OSC</sub>	System Frequency	3V	—	2.5	4	—	kHz
		5V		5	10	—	
R <sub>OUT</sub>	Output Source Resistance	3V	I <sub>OUT</sub> =10mA	—	97	150	Ω
		5V	I <sub>OUT</sub> =20mA	—	60	100	
V <sub>CON-EFF</sub>	Voltage Conversion Efficiency	3V	No load	99	—	—	%
		5V		99	99.9	—	
P <sub>EFF</sub>	Power Efficiency	3V	R <sub>L</sub> =5kΩ	96	—	—	%
		5V		96	98	—	


## Functional Description

HT7660 needs only two external polarized electrolytic capacitors to complete a negative voltage converter.

HT7660 has four MOS power switches: S1, S2, S3 and S4. For the first half cycle, when S2 and S4 are open, Capacitor C1 is charged to a voltage V<sub>DD</sub> through S1 and S3. During the second half cycle, when S1 and S3 are open, the charge on Capacitor C1 is shifted to Capacitor C2 through S2 and S4. Thereby, the voltage across Capacitor C2 is V<sub>DD</sub>. Because the positive terminal of C2 is connected to V<sub>SS</sub>, we get a -V<sub>DD</sub> voltage at V<sub>OUT</sub> pin.

For high voltage operation, the LV pin is left floating to enable the voltage regulator. This can reduce the current consumption of the RC oscillator, and thus get a fixed switching frequency f<sub>OSC</sub> with high voltage range. For low voltage operation, the LV pin is connected to V<sub>SS</sub> to bypass the voltage regulator of which inherent voltage drop can degrade the operation at low voltages.


A capacitor may be connected between V<sub>DD</sub> and pin OSC to lower the switching f<sub>OSC</sub>, and an external clock may be added to replace the built-in RC oscillator.

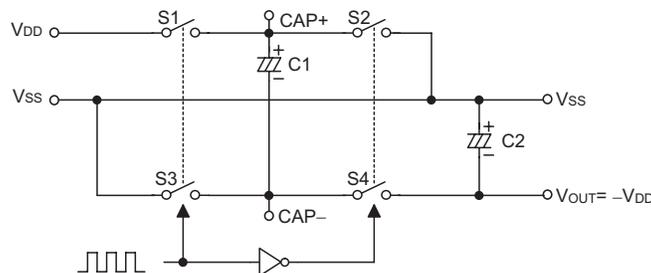


The operating mode of HT7660

## Application Circuits


### Simple Negative Voltage Converter

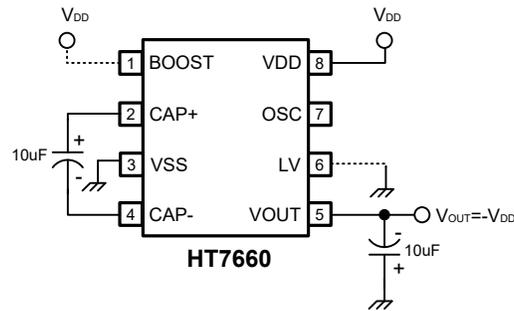


### Simple Voltage Multiplier

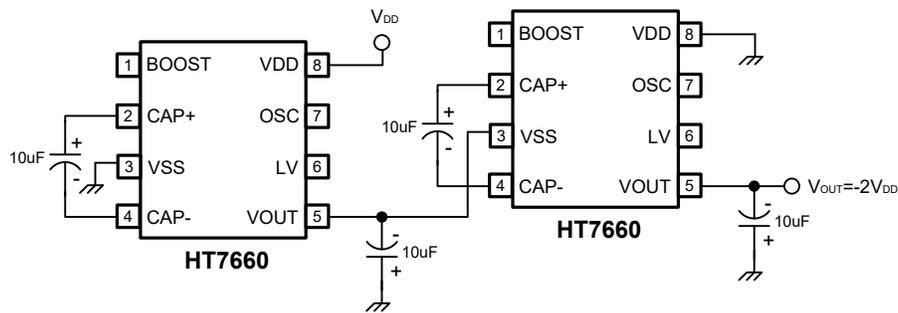


### External Switching Frequency

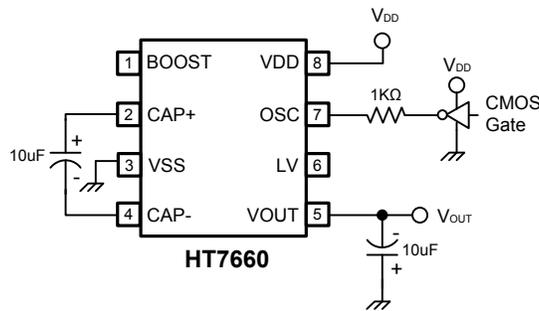

### Lower Switching Frequency

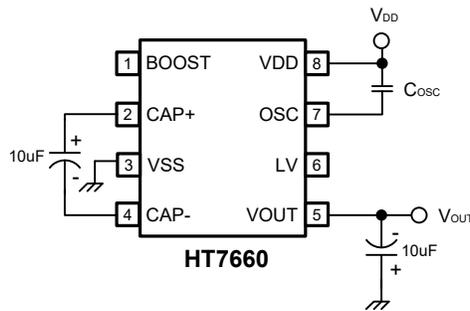


Positive Voltage Doubler

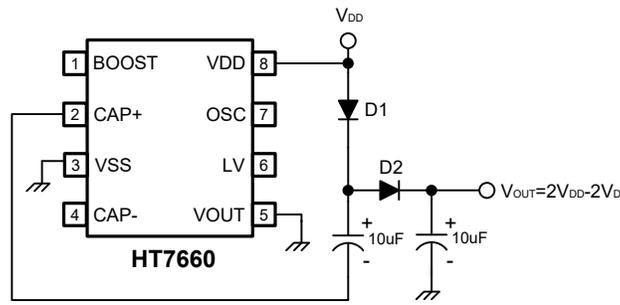


Note:  $V_d$  is forward voltage drop of diode D1 and D2

Voltage Splitter

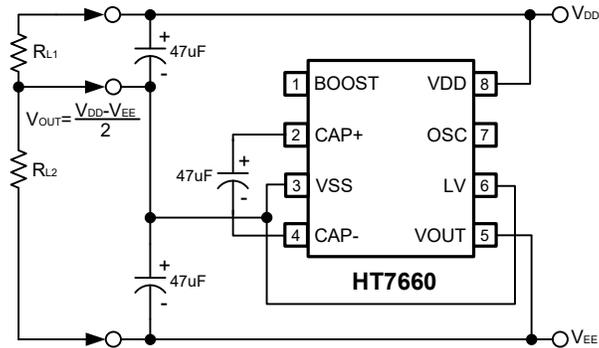

Combined Negative Voltage Converter and Positive Voltage Doubler

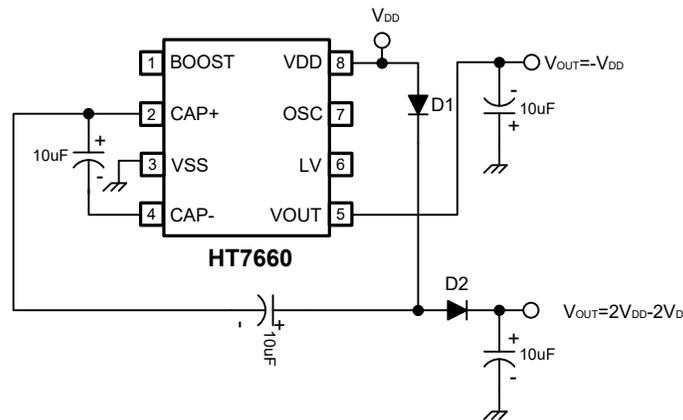




## Package Information

Note that the package information provided here is for consultation purposes only. As this information may be updated at regular intervals users are reminded to consult the [Holtek website](#) for the latest version of the [Package Information](#).

Additional supplementary information with regard to packaging is listed below. Click on the relevant section to be transferred to the relevant website page.

- Package Information (include Outline Dimensions, Product Tape and Reel Specifications)
- The Operation Instruction of Packing Materials
- Carton information

## 8-pin SOP (150mil) Outline Dimensions



Symbol	Dimensions in inch		
	Min.	Nom.	Max.
A	0.228	—	0.244
B	0.150	—	0.157
C	0.012	—	0.020
C'	0.188	—	0.197
D	—	—	0.069
E	—	0.050	—
F	0.004	—	0.010
G	0.016	—	0.050
H	0.007	—	0.010
$\alpha$	0°	—	8°

Symbol	Dimensions in mm		
	Min.	Nom.	Max.
A	5.79	—	6.20
B	3.81	—	3.99
C	0.30	—	0.51
C'	4.78	—	5.00
D	—	—	1.75
E	—	1.27	—
F	0.10	—	0.25
G	0.41	—	1.27
H	0.18	—	0.25
$\alpha$	0°	—	8°

Copyright© 2023 by HOLTEK SEMICONDUCTOR INC. All Rights Reserved.

The information provided in this document has been produced with reasonable care and attention before publication, however, HOLTEK does not guarantee that the information is completely accurate. The information contained in this publication is provided for reference only and may be superseded by updates. HOLTEK disclaims any expressed, implied or statutory warranties, including but not limited to suitability for commercialization, satisfactory quality, specifications, characteristics, functions, fitness for a particular purpose, and non-infringement of any third-party's rights. HOLTEK disclaims all liability arising from the information and its application. In addition, HOLTEK does not recommend the use of HOLTEK's products where there is a risk of personal hazard due to malfunction or other reasons. HOLTEK hereby declares that it does not authorize the use of these products in life-saving, life-sustaining or safety critical components. Any use of HOLTEK's products in life-saving/sustaining or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold HOLTEK harmless from any damages, claims, suits, or expenses resulting from such use. The information provided in this document, including but not limited to the content, data, examples, materials, graphs, and trademarks, is the intellectual property of HOLTEK (and its licensors, where applicable) and is protected by copyright law and other intellectual property laws. No license, express or implied, to any intellectual property right, is granted by HOLTEK herein. HOLTEK reserves the right to revise the information described in the document at any time without prior notice. For the latest information, please contact us.