

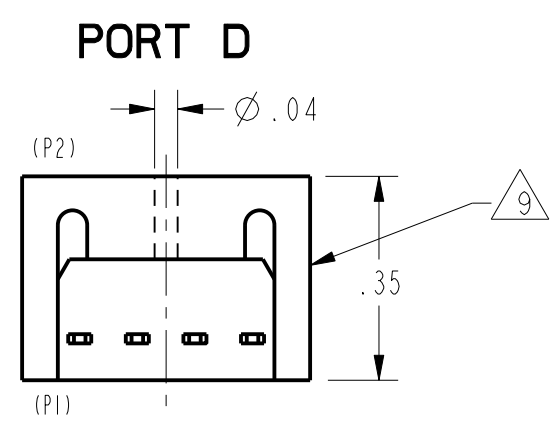
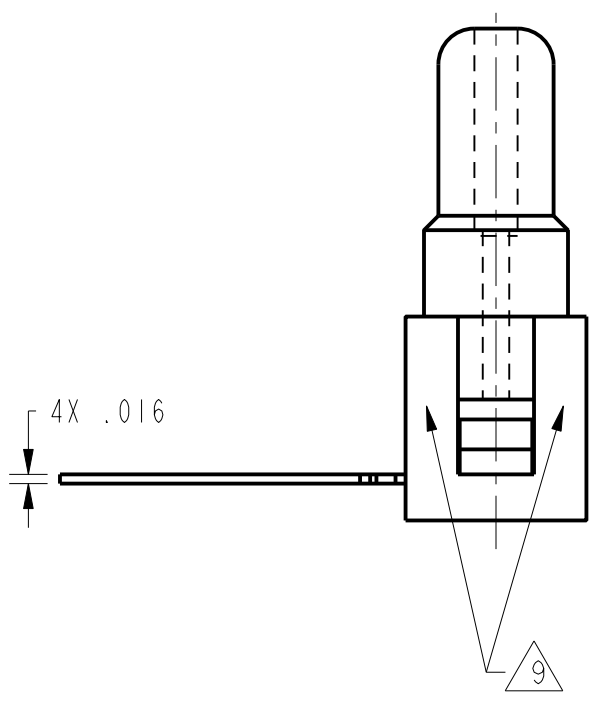
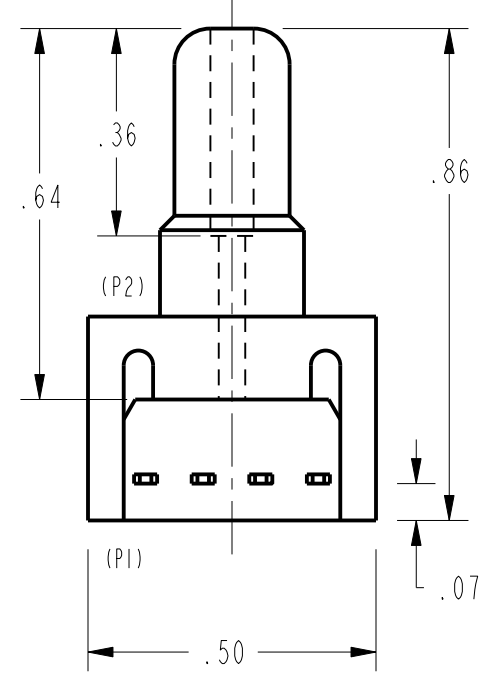
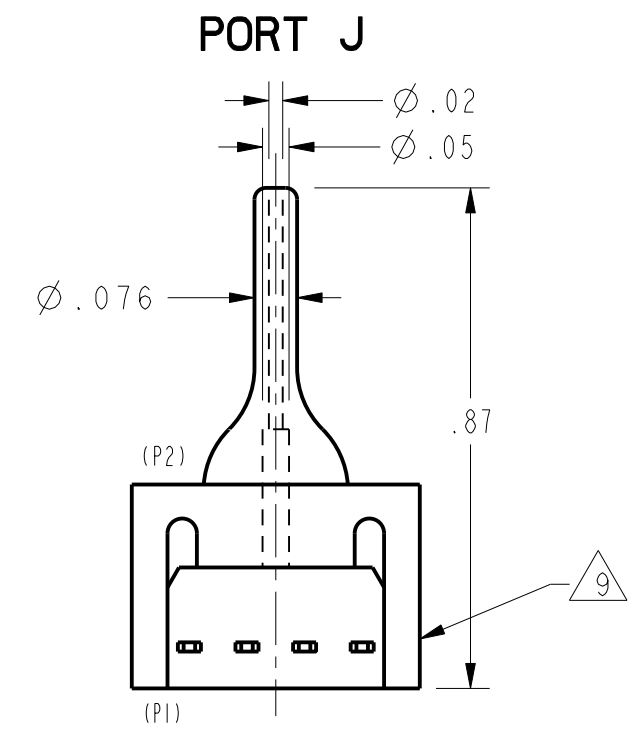


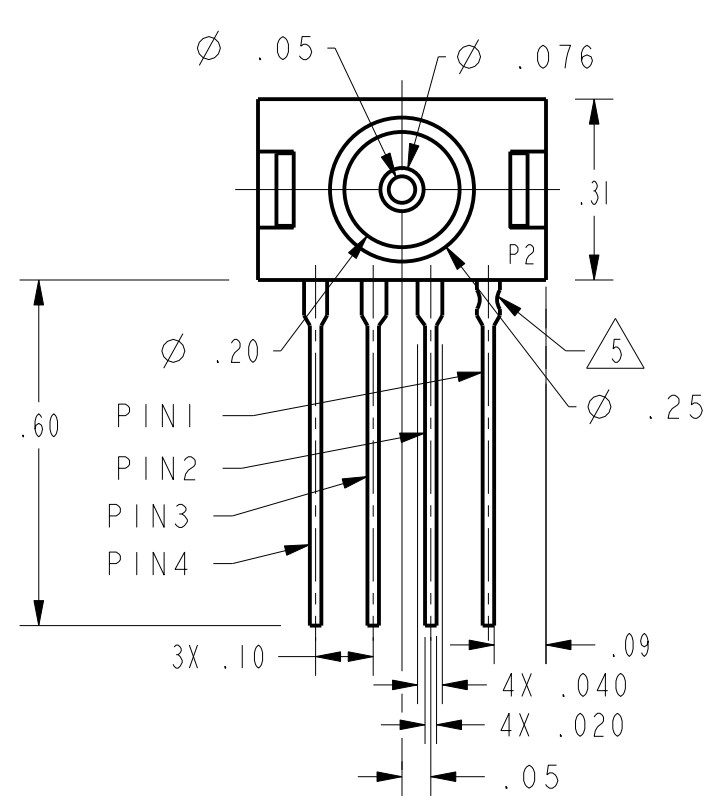

GENERAL OPERATING CHARACTERISTICS (ELECTRICAL PERFORMANCE AT 10.00 ±0.01 VDC EXCITATION, 25°C)													
PRESSURE RANGE (PSI)	0 - 1			0 - 5			0 - 15			0 - 30			
	MIN	NOM	MAX	MIN	NOM	MAX	MIN	NOM	MAX	MIN	NOM	MAX	UNITS
SPAN (P2>P1) 	-14.7	-16.7	-18.7	-47	-50	-53	-97	-100	-103	-97	-100	-103	mV
NULL OFFSET	-1.5	0	+1.5	-1.5	0	+1.5	-1.5	0	+1.5	-1.5	0	+1.5	mV
		TYP	MAX		TYP	MAX		TYP	MAX		TYP	MAX	UNITS
LINEARITY (BFSL, P2>P1)		0.25	0.5		0.4	0.5		0.25	0.5		0.1	0.2	%SPAN
NULL SHIFT (0 TO 25°C, 25 TO 50°C) 		±0.5	±1.0		±0.5	±1.0		±0.5	±1.0		±0.75	±1.5	mV
SPAN SHIFT (0 TO 25°C, 25 TO 50°C) P2>P1 		±1.0	±2.0		±1.0	±1.5		±0.75	±1.5		±0.75	±1.5	%SPAN
REPEATABILITY AND HYSTERESIS		±0.5			±0.2			±0.2			±0.2		%SPAN
OVERPRESSURE (P2>P1; P1>P2)			20			20			45			60	PSI
ALL PRESSURE RANGES	MIN	NOM	MAX	UNITS									
EXCITATION VOLTAGE		10	16	VDC									
INPUT RESISTANCE	5.5K	7.5K	11.5K	OHMS									
OUTPUT RESISTANCE	1.5K	2.5K	3.0K	OHMS									
RESPONSE TIME			1.0	ms									
TEMPERATURE RANGES													
STORAGE	-55°C TO +100°C (-67°F TO +212°F)												
OPERATE	-40°C TO +85°C (-40°F TO +185°F)												
COMPENSATED	0 TO +50°C (+32°F TO +122°F)												

CATALOG LISTING	LASER BRAND / 9
26PCBFA3G	6BF3G
26PCCFA3G	6CF3G
26PCDFA3G	6DF3G
26PCCFD3G	6CF3G
26PCBFJ3G	6BF3G
26PCCFJ3G	6CF3G
26PCAFJ3G	6AF3G

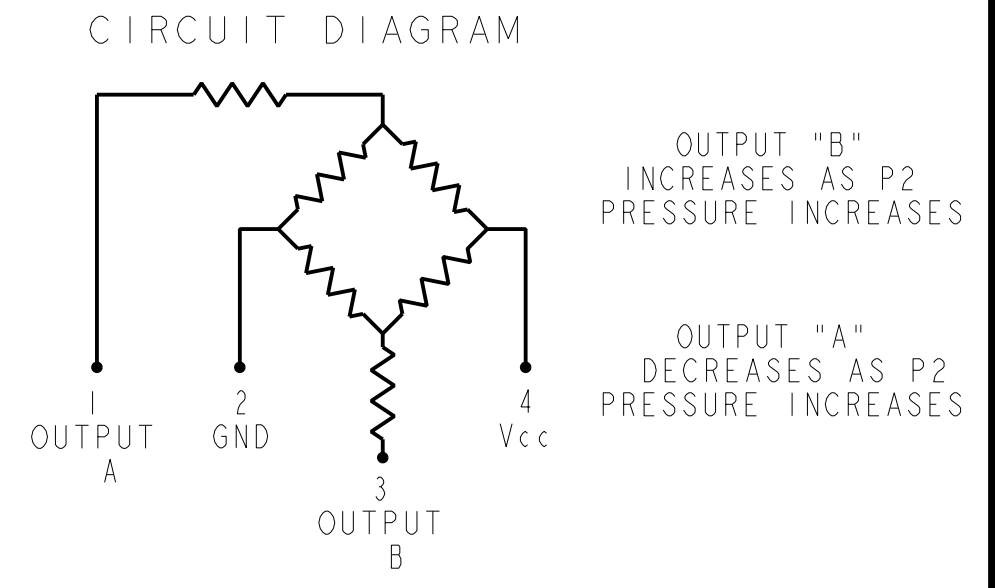

26PC_F_3G

STYLE
(G) GAGE
TERMINATION
(3) 1 X 4 (.60 IN.)
PORT
(A) STRAIGHT
(D) MODULAR
(J) SMALL NEEDLE
SEAL
(F) FLUOROSILICONE
PRESSURE
(A) 1 PSI 8
(B) 5 PSI 8
(C) 15 PSI 8
(D) 30 PSI 8

METRIC	INCHES
0,41	.016
0,51	.020
1,02	.040
1,3	.05
1,8	.07
1,93	.076
2,3	.09
2,5	.10
5,1	.20
6,4	.25
7,9	.31
8,9	.35
9,1	.36
12,7	.50
15,3	.60
16,3	.64
21,8	.86
22,1	.87

- NOTES
- 1 SPAN IS THE ALGEBRAIC DIFFERENCE BETWEEN OUTPUT AT MAXIMUM RATED OPERATING PRESSURE AND OUTPUT AT 0 PSI
 - 2 TEMPERATURE ERROR IS CALCULATED WITH RESPECT TO 25°C
 - 3 - INPUT MEDIA LIMITED ONLY TO THOSE MATERIALS THAT WILL NOT ATTACK SILICON, THE HOUSING MATERIAL OR SEAL MATERIAL
 - 4 - TERMINALS ARE PLATED FOR SOLDERING (LIMIT SOLDERING TO 315°C FOR 10 SECONDS MAXIMUM)
 - 5 PIN 4 IS IDENTIFIED BY NOTCH IN LEAD
 - 6 - SENSOR IS OPERATIONAL OVER VACUUM PRESSURE RANGE
 - 7 - RATIO METRIC TO SUPPLY VOLTAGE#
 - 8 DIE ROTATED 90°
 - 9 CATALOG LISTING AND DATE CODE HERE. ALTERNATE FORMAT OF CATALOG LISTING IS THE ENTIRE CATALOG LISTING

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

BRIDGE PRESSURE SENSOR

26PC SERIES CHART 7

CATALOG LISTING

ONE PLACE (.0) ±.030
TWO PLACES (.00) ±.015
THREE PLACES (.000) ±.005
ANGLES ±
WEIGHT 2 OZ.

THIRD ANGLE PROJECTION

SCALE 3 : 1

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

PTC/CAD 2D
JAF 24MAY99
CHECK 24MAY99
SAV
CHECK 28JUN05
AK
REPLACES
RELEASE NO. CO-74532
PAGE 1 OF 1
26PC SERIES CHART 7
DRAWING NUMBER
12
ISSUE