


Optional DC UPS Module : AUPS-A10

- 1.VESA 75 standard for IOVU-751R product.
- 2.Enhance charger and battery status by network remote management software



• Network Remote Management Software

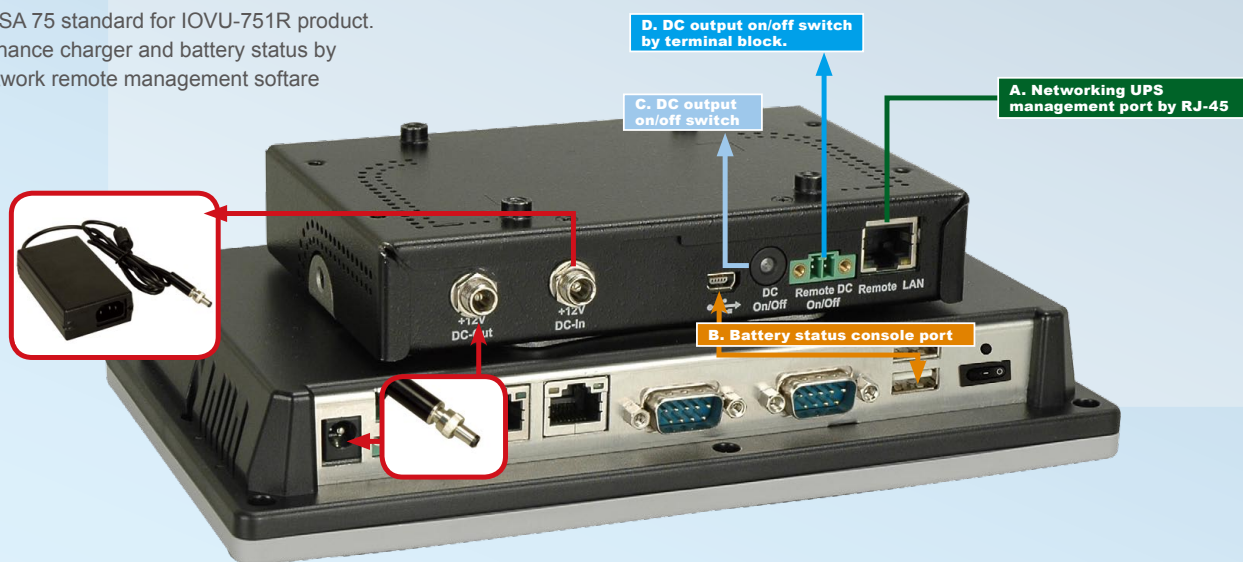

SMTP Server: Port:
 User Name:
 Password:
 To:
 Subject:
 Message:

E-Mail Alarming

Low Battery/High Temperature Alarm

IEI UPS will pop-up a status window to notify users when a special event is happened, such as low battery or high temperature (over 60°C).

Special event Pop-up :

☒ Yes ☐ No

Send E-Mail

SMTP Server: Port:
 User Name:
 Password:
 To:
 Subject:
 Message:

E-mail

Board Configuration

Board Name:
 Board ID:
 Board Type:
 Board Version:
 Board Model:
 Board Serial:

configuration

IEIUPS!

IEIUPS! (IEI UPS System)

IEIUPS! (IEI UPS System)

IEIUPS! (IEI UPS System)

Status

File Uploads

File Name:
 File Size:
 File Type:
 File Content:

Upload

Specification

Model Name		AUPS-A10
Output	Voltage	+12V +/-5%
	Output Power	60W
Input	Voltage	+12V
	Type	Li-Ion 2S2P
Battery	Normal Voltage	7.4V 3800mAH
	Backup	60W/10Min
Physical	Dimensions	150mm(L) * 95mm(W)*34mm(H)
	Weight	1.2kg
LED Indicator	Green	DC power input
	Yellow	Battery charging
	Orange	Battery discharging
Environment	Operating Tem.	0°C~40°C
	Storage Tem.	-20°C~50°C

Ordering Information

Part Number	Description
AUPS-A10-R10	VESA 75, DC 12V input 60W UPS module with 3800mAH, 2S2P Li-Ion battery

Packing List

1 x DC jack cable	1 x screw kit
1 x USB cable	