




AS-Interface ProcessLine module

ProcessLine 8 SB IP69K

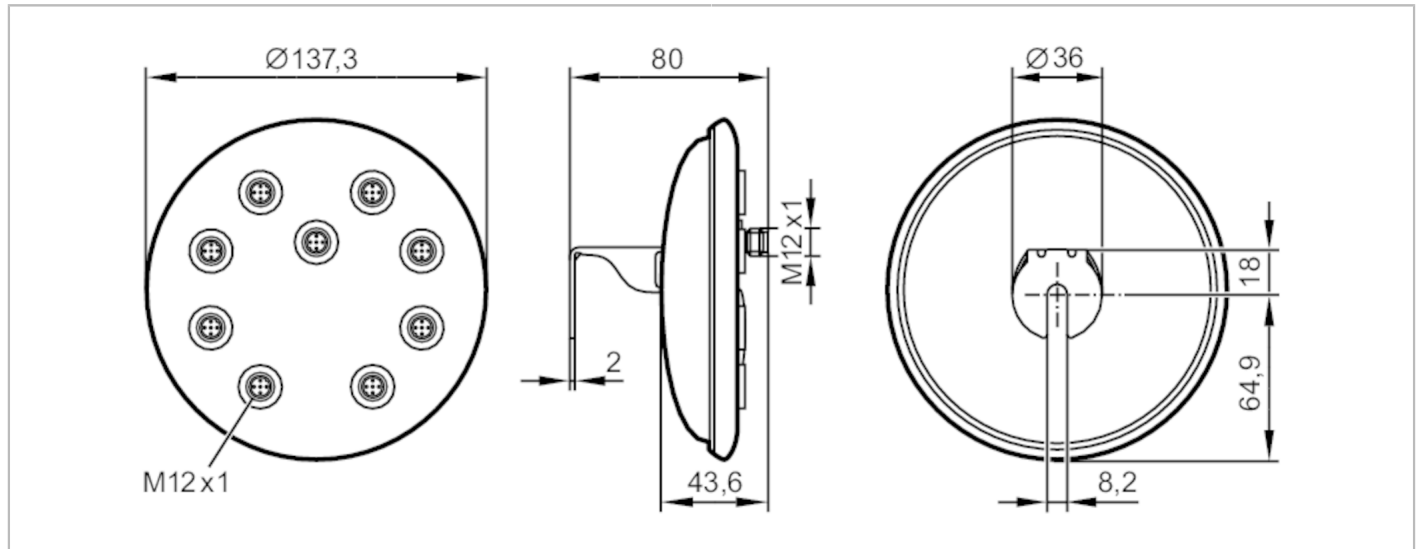

Application		
Application	hygienic and wet areas in the food industry	
Electrical data		
Operating voltage	[V]	26.5...31.6 DC
Max. current load per module/slot	[A]	4; (AS-i: 4 A; AUX: 4 A)
Additional voltage supply	[V]	20...30 DC; (AUX)
Operating conditions		
Ambient temperature	[°C]	-5...70
Protection	IP 68; IP 69K	
Tests / approvals		
EMC	EN 62026-2	
	EN 61000-6-2	
Mechanical data		
Weight	[g]	613.5
Housing	cylindrical	
Type of mounting	Mounting base	
Dimensions	[mm]	Ø 137.3 / L = 80
Materials	stainless steel; PC	
Electrical connection		
Module connection	M12	
Accessories		
Items supplied	Protective cap: M12, E70297	
Accessories (optional)	Torque wrench:, E70390	
Remarks		
Pack quantity	1 pcs.	




AS-Interface ProcessLine module

ProcessLine 8 SB IP69K

Electrical connection - plug

Connector: M12; coding: A; Tightening torque: 1.2...1.4 Nm



1	AS-i+
2	0 V
3	AS-i -
4	+24 V
5	functional earth