




Inductive analogue sensor

IFK4004A2PKG/IO/US

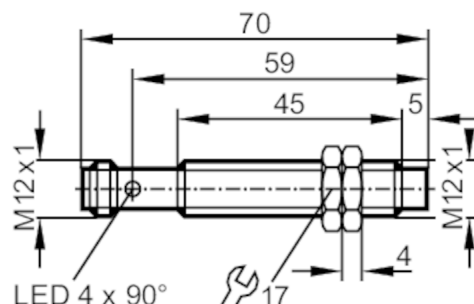

Product characteristics		
Housing		threaded type
Dimensions	[mm]	M12 x 1 / L = 70
Electrical data		
Operating voltage	[V]	15...30 DC
Current consumption	[mA]	< 20
Protection class		II
Reverse polarity protection		yes
Outputs		
Analogue voltage output	[V]	0...10; (linear; gradient: 2,77 V/mm; for frontal approach and for target made of mild steel: 12 x 12 x 1 mm)
Min. load resistance	[Ω]	2000
Short-circuit protection		yes
Overload protection		yes
Detection zone		
Measuring range	[mm]	0.4...4
Accuracy / deviations		
Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminium: 0.4 / copper: 0.3
Linearity error of analogue output	[%]	± 3; (of UA max)
Repeatability analogue output	[%]	± 2; (of UA max)
Temperature coefficient		± 10 %; (of UA max)
Response times		
Response time	[ms]	< 10
Operating conditions		
Ambient temperature	[°C]	-25...80
Protection		IP 67
Tests / approvals		
MTTF	[years]	220
Mechanical data		
Weight	[g]	44.5



Inductive analogue sensor

IFK4004A2PKG/IO/US

Housing	threaded type
Mounting	non-flush mountable
Dimensions [mm]	M12 x 1 / L = 70
Thread designation	M12 x 1
Materials	housing: brass white bronze coated; sensing face: PBT
Tightening torque [Nm]	7

Displays / operating elements

Display	within the operating range	1 x LED, yellow lights
	outside the operating range	1 x LED, yellow flashing

Accessories

Items supplied	lock nuts: 2
----------------	--------------

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection - plug

Connector: 1 x M12; coding: A



Connection

