

This document is only an extract of the datasheet which can be provided by Infineon in its full version upon request.

Product Features

- Following features are supported by the device:
- Several PSI5-modes selectable by EEPROM bit
 - Transmission of temperature and p_0 pressure information via PSI5 i/f during normal operation
 - Two pressure ranges selectable by EEPROM bit
 - Transmission of two $\Delta p/p_0$ values with different sensitivities in two time slots
 - Compliant to functional safety standard ISO 26262
 - Compatible to AK-LV 29 and AK-LV 38
 - Compatible to the AK-LV 38 addendum with extended measurement range
 - End-of-line EEPROM programming via PSI5 interface
 - EEPROM for ID number, calibration and mode selection
 - Relative pressure signal ($\Delta p/p_0$ -signal)
 - Application compatible to KP20x



Product validation

Qualified for automotive applications.
Product validation according to AEC-Q100.

Description

The device is a pressure sensor for the detection of side crashes in passenger cars and for other pressure based collision detection systems like Pedestrian or Front Crash Protection. In these applications the pressure sensor is assembled in a door module located within the car's side door or connected to an other crash sensitive air volume like a tube in the bumper of the car. When the air volume is compressed due to the collision, the device provides an output, which is proportional to the pressure change inside the sensitive air volume ($\Delta p/p_0$). The amplitude of the output is independent of the ambient pressure but is dependent on the relative pressure change.

The device provides the relative pressure as a digital Manchester encoded output signal. This cost optimized configuration allows autonomous operation of the sensor without any further logic ICs in the pressure satellite.

Table 1 Order Information

Product Name	Product Type	Package	Ordering Code
KP305	ISO26262 compliant pressure sensor for side crash, pedestrian impact and front crash detection	DSOF-8-164	SP001236092

Table of contents

	Table of contents	2
1	Product description	4
1.1	Functional safety features	4
1.2	Operating modes	4
2	Pin configuration	5
3	General product characteristics	6
3.1	Absolute maximum ratings	6
3.2	Operating conditions	7
3.2.1	Temperature profile	9
3.3	Electrical characteristics	9
3.3.1	Power supply and micro break circuitry	9
3.3.2	Data range and accuracy	11
3.3.3	Digital core and signal path filter	14
3.3.4	PSI5 interface	15
3.3.5	EEPROM and load characteristics	20
4	Functional block description	21
4.1	PSI5 interface: Sensor-to-ECU communication	21
4.1.1	Physical layer	21
4.1.1.1	Synchronous communication	21
4.1.1.2	Synchronization pulse detection	22
4.1.1.3	Asynchronous communication	24
4.1.2	Data link layer	24
4.1.2.1	PSI5 protocols	24
4.1.2.2	Data protocol (10-bit format)	25
4.1.2.2.1	Data range	25
4.1.2.3	Data protocol (16-bit format)	27
4.1.2.3.1	CRC calculation	27
4.1.2.3.2	Data range scaling	28
4.1.2.3.3	Data range	28
4.1.3	PSI5 interface application layer	30
4.1.3.1	Phase 1	30
4.1.3.2	Phase 2	30
4.1.3.2.1	Identification Data Content	30
4.1.3.3	Phase 3	31
4.1.3.4	Phase 4	32
4.1.3.5	Error sequence	33
4.2	Micro break functionality	33
4.3	Test modes	34

5 **Application information**35

5.1 Potential target applications35

5.2 Application example 35

5.3 Application circuit example36

5.4 Electro magnetic compatibility (EMC) 36

6 **Package information**37

6.1 Package outline 37

6.2 Pick and place info38

6.2.1 Component placement 38

6.2.2 Nozzle38

6.3 Soldering profile39

6.4 Identification code 40

7 **References** 41

8 **Revision history** 42

Disclaimer43

1 Product description

1.1 Functional safety features

Several functional safety features are implemented by the device to ensure safe operation in the respective applications.

1.2 Operating modes

The device supports the following operating modes and can be selected by EEPROM.

Table 2 Definition of valid operating modes

Mode	Dynamic Range	Sensitivity	Available protocols	p ₀ range	p ₀ or T _j transmission
Mode 1	-5% ... +15%	20.48 LSB/%	P10P-500/3L P10P-500/4H P16CRC-500/3H P16CRC-500/2L	45.5 ... 110 kPa	no
Mode 2	-15% ... +23.4%	20.48 LSB/%	P10P-500/3L P10P-500/4H P16CRC-500/3H P16CRC-500/2L P10P-250/1L P10P-250/2H A10P-250/1L	45.5 ... 110 kPa 45.5 ... 140 kPa	in additional time slot
Mode 3	-15 ... +23.4% -15 ... +100%	20.48 LSB/% 4.80 LSB/%	P10P-500/3L P10P-500/4H transmission in different slots	45.5 ... 110 kPa 45.5 ... 140 kPa	in additional time slot
Mode 4	-15% ... +100%	20.48 LSB/%	P16CRC-500/3H P16CRC-500/2L	45.5 ... 110 kPa 45.5 ... 140 kPa	in additional time slot

- The parameters "Dynamic range" (clipping limits) and "Sensitivity" are linked with the selected operating mode.
- Only the here specified protocols in combination with the operating modes are allowed and verified. For maximum number of allowed time slots refer to section 'PSI5 protocols' in Datasheet (Rev.1.20), 2020-11-24
- For some operating modes with additional time slots, the maximum supply voltage VDD is reduced. For details see [Table 5](#)

2 Pin configuration

The figure below shows the pin configuration.

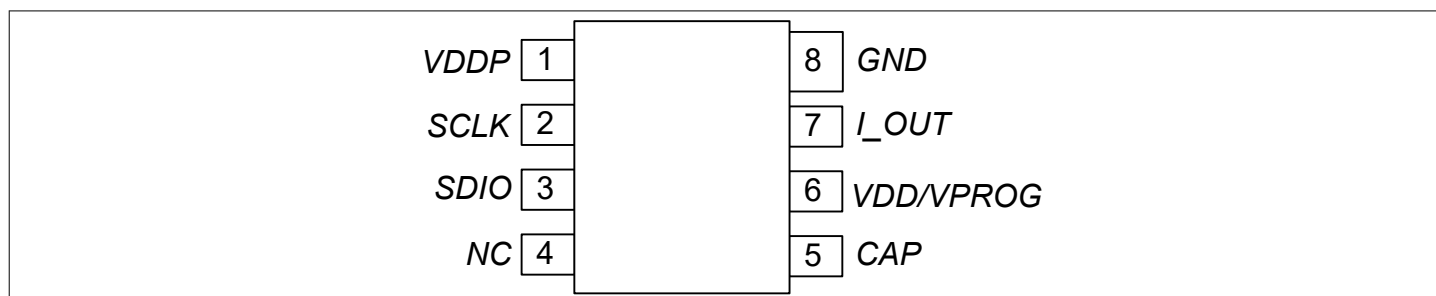


Figure 1 Pin configuration (PG-DSOF-8-164)

The table below shows the pin description.

Table 3 Pin description

Pin No.	Symbol	Function	Comment
1	VDDP	power supply for serial i/f drivers	+5V, internal pull down
2	SCLK	serial interface clock	internal pull up
3	SDIO	input and output pin for serial interface	internal pull up
4	NC	not connected	
5	CAP	buffer capacitance	optional
6	VDD/VPROG	supply voltage / EEPROM Programming voltage	–
7	I_OUT	current modulator output	–
8	GND	chip ground	–

Note: Pins 1 ... 4 must not be connected in application.

3 General product characteristics

3.1 Absolute maximum ratings

Table 4 Absolute maximum ratings

Parameter	Symbol	Values			Unit	Note or condition	P-Number
		Min.	Typ.	Max.			
Voltage on VDD	V _{DD}	-16.5	–	24	V	$ V_{DD} - V_{iout} \leq 24 \text{ V}$	REQ-2490
Voltage on I_OUT	V _{iout}	-16.5	–	24	V	$ V_{DD} - V_{iout} \leq 24 \text{ V}$	REQ-2492
Voltage on CAP	V _{CAP}	-16.5	–	24	V	$ V_{DD} - V_{iout} \leq 24 \text{ V}$	REQ-2493
Voltage on serial pins (VDDP, SCLK, SDIO, NC)	V _{dig_pin}	-0.3	–	5.5	V		REQ-2494
Current on serial pin (SCLK, SDIO)	I _{dig_out}	–	–	0.1	mA		REQ-2495
Supply current on VDDP pin	I _{VDDP}	–	–	1	mA		REQ-2496
Maximum operating temperature	T _{Op_max}	–	–	135	°C	time limited for 30 minutes maximum	REQ-2497
Ambient storage temperature	T _{st}	-55	–	135	°C		REQ-2498
Input pressure range	p _{range}	10	–	300 600 *)	kPa kPa	*) limited time: max. 300 s	REQ-2499
ESD robustness according to Human Body Model (HBM) HV-pins: VDD, GND, I_OUT, CAP	V _{ESD-HV}	–	–	4	kV	according to ANS/ESDA/ JEDEC JS-001	REQ-2500
ESD robustness according to Human Body Model (HBM) LV-pins: VDDP, SCLK, SDIO, NC	V _{ESD-LV}	–	–	2	kV	according to ANS/ESDA/ JEDEC JS-001	REQ-2502
Latch-up robustness for each pin	I _{latchup}	±100	–	–	mA	according to EIA/ JESD78	REQ-2504
Lid pull-off force	F _{pull_off_lid}	1	–	–	N		REQ-2505
Lid push-in force	F _{push_in_lid}	–	–	10	N	max. allowed force on top of the lid without damaging the sensor	REQ-2506
Mechanical shock survival	g _{st}	-2000	–	2000	g	unpowered, 0.5 ms	REQ-2507

(table continues...)

Table 4 (continued) Absolute maximum ratings

Parameter	Symbol	Values			Unit	Note or condition	P-Number
		Min.	Typ.	Max.			
Differential pressure between inside and outside of package	p_{diff}	-90		300	kPa	the minimum absolute pressure of p_{range} must not be violated	REQ-2508

Attention: Stresses above the max. values listed in this chapter may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability. Maximum ratings are absolute ratings; exceeding only one of these values may cause irreversible damage to the integrated circuit.

3.2 Operating conditions

Table 5 Operating conditions

Parameter	Symbol	Values			Unit	Note or condition	P-Number
		Min.	Typ.	Max.			
Supply voltage at pin VDD	V_{DD}	4.5	–	11.0	V	$V_{DD_max} = 9V$ for operation in triple slot mode (all protocols) and dual slot mode P16CRC-500/3H; $V_{DD_max} = 8.4V$ for operation in dual slot mode with P16CRC-500/2L	REQ-2510
Voltage at pin I_OUT	V_{iout}	3.5	–	11.0	V		REQ-2513
Voltage at pin CAP	V_{CAP}	–	–	V_{sync}	V	pin only defined to connect with a capacitor; connection with a constant voltage source not allowed	REQ-2515
Voltage during sync pulse at pin VDD & pin I_OUT	V_{sync}	–	–	16.5	V		REQ-2516
Supply voltage power up/down gradient	V_{grad}	1E-5	–	1E4	V/ms		REQ-2518
Ambient operating temperature	T_{Op}	-40	–	125	°C	temperature outside the sensor	REQ-2520

(table continues...)

Table 5 (continued) Operating conditions

Parameter	Symbol	Values			Unit	Note or condition	P-Number
		Min.	Typ.	Max.			
Absolute operating pressure range	p_{abs}	38.7	–	280.0	kPa	range for pressure pulses during a crash	REQ-2525
Ambient operating pressure for p_0 -range1	p_{amb_1}	45.5	–	110.0	kPa	range for p_0 value in p_0 -range1	REQ-2526
Ambient operating pressure for p_0 -range 2	p_{amb_2}	45.5	–	140.0	kPa	range for p_0 value in p_0 -range2	REQ-2527
Lifetime	t_{live}	15	–	–	years		REQ-2528
Operating time 1	t_{Op_1}	–	–	12000	h	valid for mission profile in Table 6	REQ-2529
Operating time 2	t_{Op_2}	–	–	8000	h	valid for mission profile in Table 7	REQ-2530

Note: Outside the normal operation supply voltage range the overvoltage detection disables the Manchester communication. As long as the overvoltage detection has not detected an overvoltage, the sensor operates inside the specified operating range.

Attention: The device is sensitive to light entering through the pressure port. All specifications are valid for a illuminance of less than 1 lx.

3.2.1 Temperature profile

In addition to the lifetime (ambient operation temperature), the temperature profile over lifetime is given as follows:

Table 6 Lifetime profile t_{op_1} (biased device)

Ambient temperature for the P-SAT module	Lifetime
T_a [°C]	[%]
-40	6
+23	20
+52	65
+80	8
+82	1

Table 7 Lifetime profile t_{op_2} (biased device)

Ambient temperature for the P-SAT module	Lifetime
T_a [°C]	[%]
-40	6
+23	20
+82	65
+115	8
+120	1

Note: A maximum temperature difference of T_{rise_mod} between the sensor ambient temperature and module ambient temperature is assumed.

3.3 Electrical characteristics

Product characteristics involve the spread of values ensured within the specified voltage and ambient temperature range. Typical characteristics are the median of the production.

3.3.1 Power supply and micro break circuitry

Table 8 Power supply and micro break circuitry

Parameter	Symbol	Values			Unit	Note or condition	P-Number
		Min.	Typ.	Max.			
Supply current into VDD	I_{VDD}	3.5	–	5.5	mA		REQ-2536
Supply current into I_{OUT}	$I_{I_OUT_idle}$	0.0	–	0.8	mA		REQ-2537
Common supply current into VDD & I_{OUT}	I_{idle}	4.0	–	6.0	mA		REQ-2538
Current during Manchester communication	I_{Man}	26	31	36	mA	$I_{Man} = I_{idle} + \Delta I_{mod}$	REQ-2540

(table continues...)

Table 8 (continued) Power supply and micro break circuitry

Parameter	Symbol	Values			Unit	Note or condition	P-Number
		Min.	Typ.	Max.			
Ripple current on supply voltage	I_{ripple}	-0.5	–	0.5	mA	0 Hz - 2 MHz; I_{ripple} is max AC amplitude and only valid with application circuit	REQ-2542
Supply current drift rate	$I_{\text{idle_drift}}$	–	–	1.0	mA/s	characterized by the average of minimum 1s	REQ-2543
Voltage level for activating micro break function	$V_{\mu\text{b}}$	3.1	–	4.1	V		REQ-2548
Microcut rejection time	t_{CAP}	10	–	–	μs	Time below $V_{\mu\text{b}}$ where no sensor reset is allowed; $C_{\text{buf}} > 100 \text{ nF}$	REQ-2550
Micro break hysteresis	$V_{\mu\text{b_hys}}$	0.4	–	0.9	V	application resistors: $47 \Omega \pm 5\%$	REQ-2552
Load resistor for C_{buf}	R_{CAP}	1.4	2.0	2.6	k Ω	resistor value between VDD and CAP pin	REQ-2554
External buffer capacitor	C_{buf}	0	–	1	μF	no capacitor needed to avoid oscillation of regulator; ¹⁾	REQ-2555
Allowed range for C_{buf} to pass buffer-cap-diagnosis-test	$C_{\text{buf_test}}$	33	–	C_{buf}	nF	VDD = 6 V; CAP-pin discharged to GND before start-up; At values below, buffer-cap-diagnosis-test might diagnose a missing C_{buf}	REQ-2558

¹⁾ If a capacitor value below $C_{\text{buf_test_min}}$ is used, the buffer-cap-diagnosis-test must be disabled in EEPROM; a value larger than given here can lead to a violation of the PSI5 specification parameter t_{Th} ;

3.3.2 Data range and accuracy

Table 9 Data range and accuracy

Parameter	Symbol	Values			Unit	Note or condition	P-Number
		Min.	Typ.	Max.			
Nominal measurement range1 (Mode1)	range _{nom1}	-5.0	–	+15.0	%	outside the specified nominal measurement range the output value is clipped	REQ-2559
Nominal measurement range2 (Mode2)	range _{nom2}	-15.0	–	+23.4	%	outside the specified nominal measurement range the output value is clipped	REQ-2560
Nominal measurement range3 (Mode3 or Mode4)	range _{nom3}	-15.0	–	+100	%	outside the specified nominal measurement range the output value is clipped	REQ-2561
$\Delta p/p_0$ output data range1 (Mode1)	$\Delta p/p_{0_dat1}$	-102	–	307	LSB	outside this defined output data range the output value is clipped	REQ-2562
$\Delta p/p_0$ output data range2 (Mode2 and Mode3-slot1)	$\Delta p/p_{0_dat2}$	-307	–	480	LSB	outside this defined output data range the output value is clipped	REQ-2563
$\Delta p/p_0$ output data range3 (Mode3-slot2)	$\Delta p/p_{0_dat3}$	-72	–	480	LSB	outside this defined output data range the output value is clipped	REQ-2564
$\Delta p/p_0$ output data range4 (Mode4)	$\Delta p/p_{0_dat4}$	-307	–	2048	LSB	outside this defined output data range the output value is clipped	REQ-2565
Nominal sensitivity1 (Mode1, Mode2, Mode3-dp/p0_1, Mode4)	sense _{out1}	–	2.048	–	LSB/‰	output signal $\Delta p/p_0$	REQ-2567

(table continues...)

Table 9 (continued) Data range and accuracy

Parameter	Symbol	Values			Unit	Note or condition	P-Number
		Min.	Typ.	Max.			
Nominal sensitivity2 (Mode3-dp/p0_2)	sense _{out2}	–	0.480	–	LSB/‰	output signal $\Delta p/p_0$ in additional time slot	REQ-2568
Pressure data offset	$\Delta p/p_{0_off}$	-0.5	–	0.5	LSB	average value at constant pressure	REQ-2569
Sensitivity error at 0h	sense _{err1_0h}	-6.0	–	+6.0	%	$\Delta p/p_0 > 10.0\%$ (over full temperature range)	REQ-2570
Sensitivity error over lifetime (-40°C ... +105°C)	sense _{err}	-7.0	–	+7.0	%	$\Delta p/p_0 > 10.0\%$; (overall sensitivity error: incl. temperature, non-linearity etc.)	REQ-2572
Sensitivity error over lifetime (+105° ... +125°C)	sense _{err_HT}	-10.0	–	+10.0	%	$\Delta p/p_0 > 10.0\%$; (overall sensitivity error: incl. temperature, non-linearity etc.)	REQ-2573
$\Delta p/p_0$ noise (RMS) (sensitivity1, p0 = 53.6 ... 110 kPa)	noise _{rms,1}	0	–	1.5	LSB	standard deviation of $\Delta p/p_0$ at constant pressure (e.g. 99.7% of the values inside the ± 4.5 LSB range)	REQ-2574
$\Delta p/p_0$ noise (RMS) (sensitivity1, p0 = 45.5 ... 53.6kPa)	noise _{rms,1_LP}	0	–	2.0	LSB	standard deviation of $\Delta p/p_0$ at constant pressure (e.g. 99.7% of the values inside the ± 6 LSB range)	REQ-2575
$\Delta p/p_0$ noise (Peak)	noise _{peak,1}	-6	–	+6	LSB	during characterization only: Peak value for 10k samples; 0h & 25°C, sensitivity1	REQ-2576

(table continues...)

Table 9 (continued) Data range and accuracy

Parameter	Symbol	Values			Unit	Note or condition	P-Number
		Min.	Typ.	Max.			
$\Delta p/p_0$ noise (RMS) (sensitivity2)	$\text{noise}_{\text{rms},2}$	0	–	0.5	LSB	standard deviation of $\Delta p/p_0$ at constant pressure (e.g. 99.7% of the values inside the ± 1.5 LSB range)	REQ-2577
Non-linearity for pressure pulses up to 23.4%	$\text{sense}_{\text{n_lin1}}$	-1.0	–	+1.0	‰	difference between actual characteristics and best fit quantized line	REQ-2578
Non-linearity for pressure pulses > 23.4%	$\text{sense}_{\text{n_lin2}}$	-2.5	–	+2.5	‰	difference between actual characteristics and best fit quantized line	REQ-2579
Pressure offset during acceleration	p_{acc}	–	–	3.5	Pa/g	ensured by design	REQ-2580
p0 data output range in Phase 4	$p_{0_word_p4_lim}$	0	–	480	LSB	outside this defined pressure data range the output value is clipped	REQ-2582
p0 data transmission sensitivity (p0 range1)	$p_{0_sens_r1}$	–	0.01868	–	kPa/LSB	valid for Phase 3 and Phase 4	REQ-2583
p0 data transmission sensitivity (p0 range2)	$p_{0_sens_r2}$	–	0.02310	–	kPa/LSB	valid for Phase 3 and Phase 4	REQ-2584
p0 data transmission offset	p_{0_offset}	–	50	–	kPa	valid for Phase 3 and Phase 4	REQ-2585
p0 data error (p0 range1)	p_{0_err1}	-3.5	–	3.5	kPa	valid for Phase 3 and Phase 4	REQ-2586
p0 data error (p0 range2)	p_{0_err2}	-3.5	–	3.5	kPa	valid for Phase 3 and Phase 4	REQ-2587
Tj data output range in Phase 4	$T_{\text{word_p4_lim}}$	-425	–	-70	LSB ₁₀	outside this defined temperature data range the output value is clipped	REQ-2589
Tj data transmission sensitivity	T_{j_sens}	–	0.61162	–	°C/LSB	valid for Phase 3 and Phase 4	REQ-2590

(table continues...)

Table 9 (continued) Data range and accuracy

Parameter	Symbol	Values			Unit	Note or condition	P-Number
		Min.	Typ.	Max.			
Tj data transmission offset	T_{j_offset}	–	-94	–	°C	valid for Phase 3 and Phase 4	REQ-2591
Tj error ($T_j = 0^{\circ}\text{C} \dots 100^{\circ}\text{C}$)	T_{j_err}	-5	–	+5	K	valid for Phase 3 and Phase 4	REQ-2592
Tj error ($T_j < 0^{\circ}\text{C}$; $T_j > 100^{\circ}\text{C}$)	T_{j_err2}	-10	–	10	K	valid for Phase 3 and Phase 4	REQ-2593

3.3.3 Digital core and signal path filter

Table 10 Digital core and signal path filter

Parameter	Symbol	Values			Unit	Note or condition	P-Number
		Min.	Typ.	Max.			
Internal clock frequency	f_{clk}	–	16.0	–	MHz		REQ-2598
Clock variation	CLK_{tol}	-4.0	–	4.0	%		REQ-2599
Clock variation during Manchester frame	$CLK_{var/frame}$	–	–	0.1	%	maximum allowed temperature gradient is +/- 1 K/min	REQ-2600
Clock drift rate	CLK_{drift}	–	–	1.0	%/s	average of min. 1s; maximum allowed temperature gradient is +/-1 K/min	REQ-2601
Sigma delta sample frequency	f_{cic}	–	1	–	MHz	average over 1 second	REQ-2602
p & p0 register update	f_{preg}	–	31.25	–	kHz	proportional to clock frequency	REQ-2603
Cut-off frequency p filter	f_{cp}	–	370	–	Hz	2 nd order low pass filter proportional to clock frequency	REQ-2604
p0 filter gradient	$ \Delta p_0/\Delta t $	0.39	0.44	0.49	kPa/s		REQ-2607

3.3.4 PSI5 interface

Table 11 PSI5 interface

Parameter	Symbol	Values			Unit	Note or condition	P-Number
		Min.	Typ.	Max.			
Bit time in 125 kbps mode	t_{Bit}	–	8.0	–	μs	proportional to clock frequency	REQ-2609
Bit time in 189 kbps mode	t_{Bit_H}	–	5.3	–	μs	proportional to clock frequency	REQ-2610
Signal modulation current	ΔI_{mod}	22	26	30	mA		REQ-2611
Fall/rise time current slope	$t_{\text{Man}_R/F}$	0.33	–	1.0	μs	$t_{\text{rise } 20, 80}$ & $t_{\text{fall } 80, 20}$, according to the PSI5 reference network, the PSI5 sensor reference tests conditions A & B [1] and the application circuit example	REQ-2613
Duty cycle ratio Manchester	$r_{\text{Man}_\text{duty}}$	47	50	53	%	$(t_{\text{fall},80} - t_{\text{rise},20}) / t_{\text{Bit}}$ ($t_{\text{fall},20} - t_{\text{rise},80}) / t_{\text{Bit}}$ according to the PSI5 reference network, the PSI5 sensor reference tests conditions A [2] and the application circuit example	REQ-2614
Sync pulse detection threshold	V_{trig}	1.4	2.0	2.6	V		REQ-2615
Time between detected rising edge of sync pulse and start of 1st Manchester bit in the PSI5-P10P-500/3L slot1 mode	$t_{\text{Slot1,frame}}$	44.1	46.4	48.7	μs	1st Manchester bit starts with nom. 4 μ low time; the trigger detection tolerance ($t_{\text{tol_detect}}$) is not included in this timing.	REQ-2626

(table continues...)

Table 11 (continued) **PSI5 interface**

Parameter	Symbol	Values			Unit	Note or condition	P-Number
		Min.	Typ.	Max.			
Time between detected rising edge of sync pulse and start of 1st Manchester bit in the PSI5-P10P-500/3L slot2 mode	$t_{\text{Slot2,frame}}$	181.3	190.9	200.4	μs	1st Manchester bit starts with nom. 4 μ low time; the trigger detection tolerance ($t_{\text{tol_detect}}$) is not included in this timing	REQ-2627
Time between detected rising edge of sync pulse and start of 1st Manchester bit in the PSI5-P10P-500/3L slot3 mode	$t_{\text{Slot3,frame}}$	328.9	346.3	363.6	μs	1st Manchester bit starts with nom. 4 μ low time; the trigger detection tolerance ($t_{\text{tol_detect}}$) is not included in this timing	REQ-2628
Time between detected rising edge of sync pulse and start of 1st Manchester bit in the PSI5-P10P-250/1L mode	$t_{\text{Slot,frame}}$	71.4	75.2	78.9	μs	1st Manchester bit starts with nom. 4 μ low time; the trigger detection tolerance ($t_{\text{tol_detect}}$) is not included in this timing	REQ-2629
Time between detected rising edge of sync pulse and start of 1st Manchester bit in the PSI5-P10P-250/2H slot1 mode	$t_{2\text{H_Slot1,frame}}$	44.1	46.4	48.7	μs	1st Manchester bit starts with nom. 2.65 μ low time; the trigger detection tolerance ($t_{\text{tol_detect}}$) is not included in this timing	REQ-2630

(table continues...)

Table 11 (continued) **PSI5 interface**

Parameter	Symbol	Values			Unit	Note or condition	P-Number
		Min.	Typ.	Max.			
Time between detected rising edge of sync pulse and start of 1st Manchester bit in the PSI5-P10P-250/2H slot2 mode	$t_{2H_Slot2,frame}$	141.0	148.4	155.8	μs	1st Manchester bit starts with nom. 2.65 μ low time; the trigger detection tolerance (t_{tol_detect}) is not included in this timing	REQ-2631
Time between detected rising edge of sync pulse and start of 1st Manchester bit in the PSI5-P10P-500/4H slot1 mode	$t_{4H_Slot1,frame}$	44.1	46.4	48.7	μs	1st Manchester bit starts with nom. 2.65 μ low time; the trigger detection tolerance (t_{tol_detect}) is not included in this timing	REQ-2632
Time between detected rising edge of sync pulse and start of 1st Manchester bit in the PSI5-P10P-500/4H slot2 mode	$t_{4H_Slot2,frame}$	139.5	146.9	154.2	μs	1st Manchester bit starts with nom. 2.65 μ low time; the trigger detection tolerance (t_{tol_detect}) is not included in this timing	REQ-2633
Time between detected rising edge of sync pulse and start of 1st Manchester bit in the PSI5-P10P-500/4H slot3 mode	$t_{4H_Slot3,frame}$	245.5	258.4	271.4	μs	1st Manchester bit starts with nom. 2.65 μ low time; the trigger detection tolerance (t_{tol_detect}) is not included in this timing	REQ-2634

(table continues...)

Table 11 (continued) **PSI5 interface**

Parameter	Symbol	Values			Unit	Note or condition	P-Number
		Min.	Typ.	Max.			
Time between detected rising edge of sync pulse and start of 1st Manchester bit in the PSI5-P10P-500/4H slot4 mode	$t_{4H_Slot4,frame}$	362.5	381.6	400.7	μs	1st Manchester bit starts with nom. 2.65 μ low time; the trigger detection tolerance (t_{tol_detect}) is not included in this timing	REQ-2635
Time between detected rising edge of sync pulse and start of 1st Manchester bit in the PSI5-P16CRC-500/3H slot1 mode	$t_{3H_Slot1,frame}$	44.5	46.4	48.3	μs	1st Manchester bit starts with nom. 2.65 μ low time; the trigger detection tolerance (t_{tol_detect}) is not included in this timing	REQ-2636
Time between detected rising edge of sync pulse and start of 1st Manchester bit in the PSI5-P16CRC-500/3H slot2 mode	$t_{3H_Slot2,frame}$	183.2	190.9	198.5	μs	1st Manchester bit starts with nom. 2.65 μ low time; the trigger detection tolerance (t_{tol_detect}) is not included in this timing	REQ-2637
Time between detected rising edge of sync pulse and start of 1st Manchester bit in the PSI5-P16CRC-500/3H slot3 mode	$t_{3H_Slot3,frame}$	332.4	346.3	360.1	μs	1st Manchester bit starts with nom. 2.65 μ low time; the trigger detection tolerance (t_{tol_detect}) is not included in this timing	REQ-2638

(table continues...)

Table 11 (continued) **PSI5 interface**

Parameter	Symbol	Values			Unit	Note or condition	P-Number
		Min.	Typ.	Max.			
Time between detected rising edge of sync pulse and start of 1st Manchester bit in the PSI5-P16CRC-500/2L slot1 mode	$t_{2L_Slot1,frame}$	44.1	46.4	48.7	μs	1st Manchester bit starts with nom. 4 μ low time; the trigger detection tolerance (t_{tol_detect}) is not included in this timing	REQ-2639
Time between detected rising edge of sync pulse and start of 1st Manchester bit in the PSI5-P16CRC-500/2L slot2 mode	$t_{2L_Slot2,frame}$	252.8	266.1	279.4	μs	1st Manchester bit starts with nom. 4 μ low time; the trigger detection tolerance (t_{tol_detect}) is not included in this timing	REQ-2640
Transmission rate in asynchronous mode	t_{async}	–	228.0	–	μs	proportional to clock frequency	REQ-2641
Filter sample time before start of frame for time slot 1	$t_{filter_freeze1}$	–	32	–	μs	proportional to clock frequency; valid for 1 st slot transmission in PSI5-P10P-500/3L and PSI5-P10P-500/4H modes only	REQ-2642
Filter sample time before start of frame for time slot 2 and 3 and 4	t_{filter_freeze}	–	40	–	μs	proportional to clock frequency	REQ-2643
Gap time in 125kHz modes	t_{GAP_L}	8.4	–	–	μs	proportional to clock frequency	REQ-2644
Gap time in 189kHz modes	t_{GAP_H}	5.6	–	–	μs	proportional to clock frequency	REQ-2645
Trigger detection tolerance	t_{tol_detect}	0	–	3	μs		REQ-2646
Duration of phase 1	t_{P1}	90.0	–	110.0	ms		REQ-2647
Duration of phase 2a	t_{P2a}	–	256	–	frame		REQ-2648
Duration of phase 2b	t_{P2b}	0	–	768	frame		REQ-2649
Duration of phase 3a	t_{P3a}	–	5	–	frame		REQ-2650

(table continues...)

Table 11 (continued) **PSI5 interface**

Parameter	Symbol	Values			Unit	Note or condition	P-Number
		Min.	Typ.	Max.			
Duration of phase 3b	t_{p3b}	–	14	–	frame		REQ-2651
Time threshold for the sensor to declare a gap	t_{sync_max}	–	576	–	μs	proportional to clock frequency	REQ-2653
Repetition of ID data	k	–	4	–			REQ-2652

3.3.5 EEPROM and load characteristics

Table 12 **EEPROM and load characteristics**

Parameter	Symbol	Values			Unit	Note or condition	P-Number
		Min.	Typ.	Max.			
Internal pull up: SCLK, SDIO	R_{pu}	30.0	–	72.5	$k\Omega$	valid only if $V_{DD}=5V$	REQ-2656
Internal pull down: V_{DDP}	R_{pd}	70	–	130	$k\Omega$		REQ-2657
No. of EEPROM programming cycles	n_{prog}	–	–	3	–	a programming cycle is defined as applying the programming pulse once in order to change the state of at least one EEPROM cell	REQ-2658
Programming temperature	T_{prog}	10	–	30	$^{\circ}C$		REQ-2664
Margin voltage “1”	V_{margin_1}	–	0	0.25	V	0h value, directly after programming	REQ-2665
Margin voltage “0”	V_{margin_0}	2.0	–	5.0	V	0h value, directly after programming	REQ-2666

4 Functional block description

4.1 PSI5 interface: Sensor-to-ECU communication

The physical link between ECU and the satellites is a two-wire, twisted pair connection according to the PSI5 standard ([2] and [3]). It provides the supply voltage to the satellite and is also used for the data transmission between the satellite and the ECU.

The communication between satellite and ECU can be unidirectional (asynchronous communication) or bidirectional (synchronous communication).

4.1.1 Physical layer

For data transmission from the sensor to the ECU, a Manchester-coded current modulation is used.

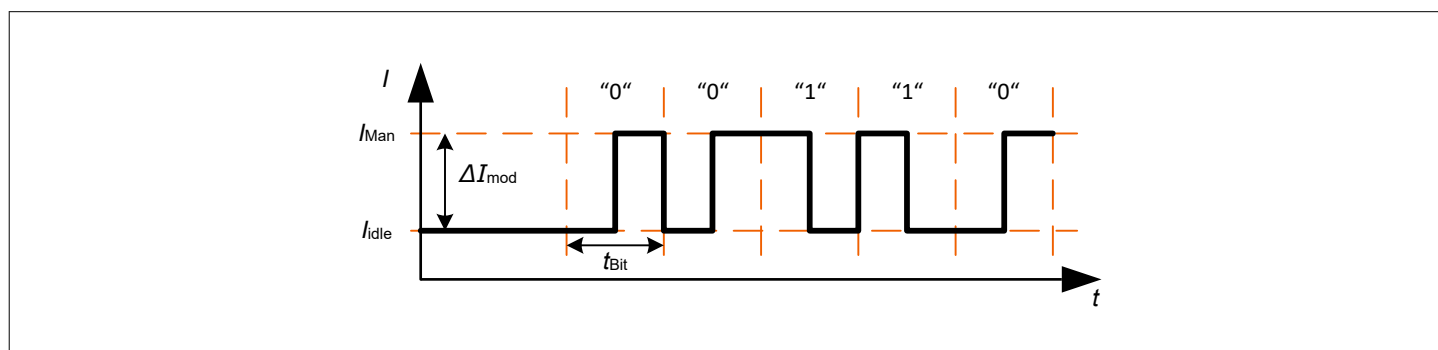


Figure 2 Manchester based current modulation

4.1.1.1 Synchronous communication

In the synchronous communication mode a short voltage pulse (sync pulse), generated by the receiver, is used as a synchronization event. The sensor detecting this sync pulse starts its data transmission after a defined period of time. This operation mode supports more than one satellite per physical channel.

If the sensor is configured to synchronous mode, synchronization pulses from the ECU are expected. In synchronous mode the sensor only transmits the data message after recognizing a sync pulse.

In PSI5-P10P-500/3L mode for example, the sensor can transmit the Manchester frames in the 1st, 2nd or 3rd slot ($t_{Slot1,Start}$, $t_{Slot2,Start}$, $t_{Slot3,Start}$).

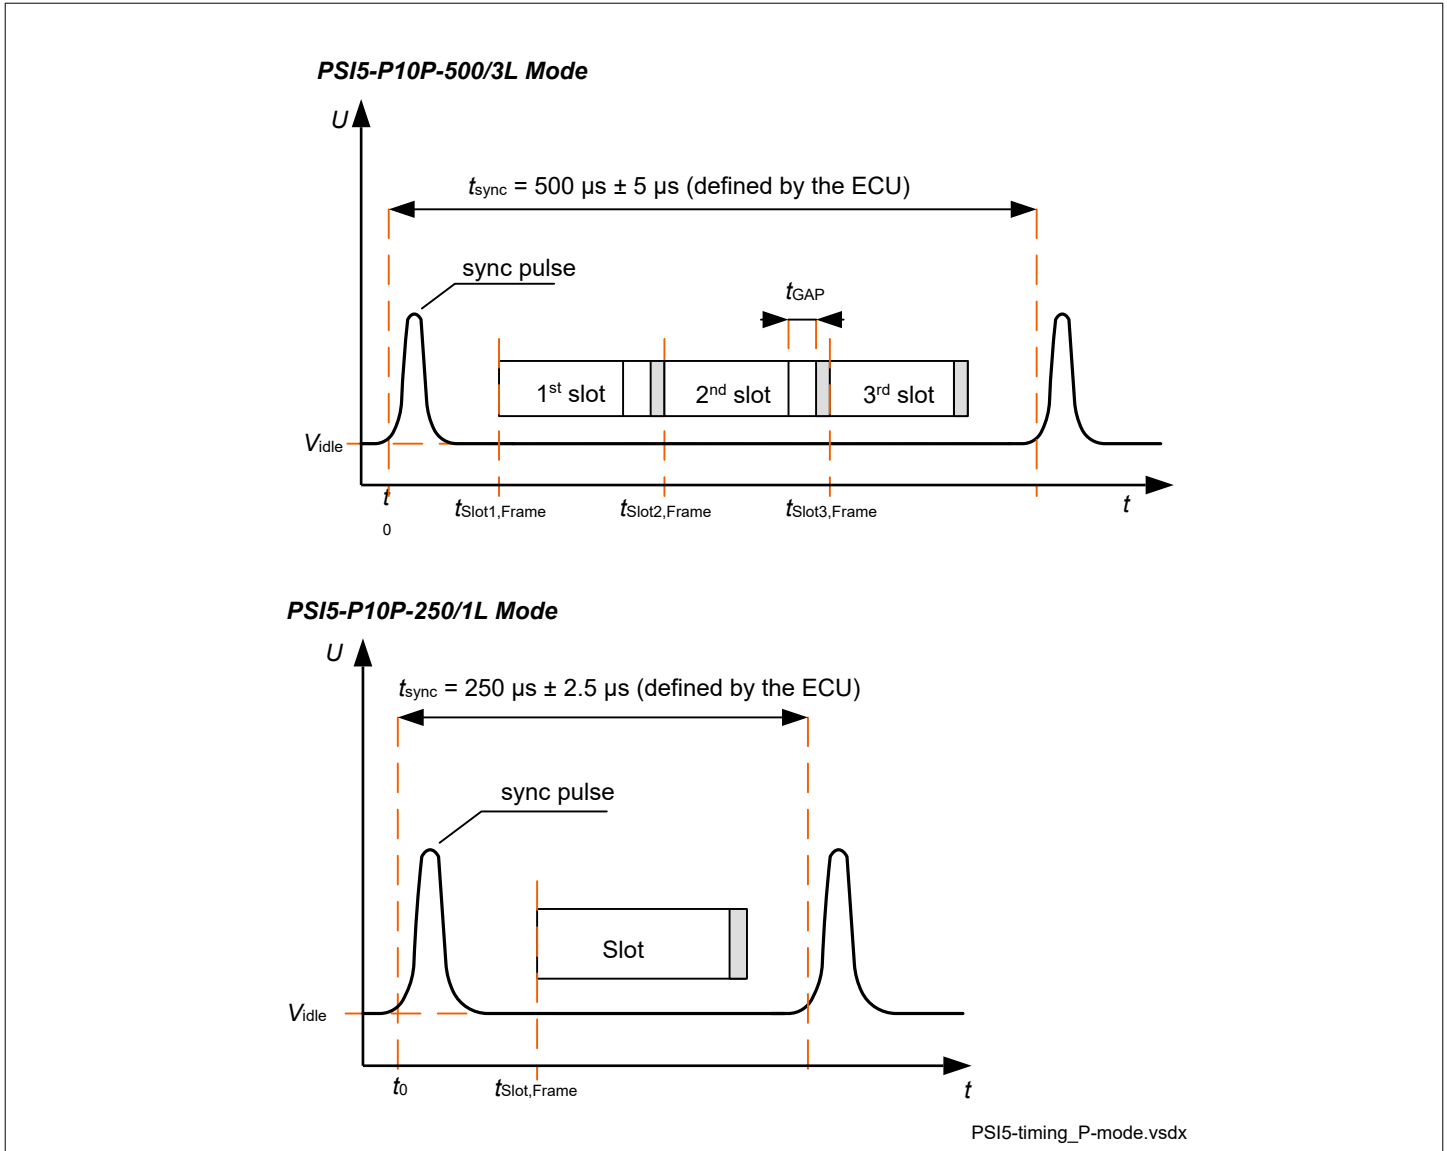


Figure 3 Timing in synchronous mode

4.1.1.2 Synchronization pulse detection

The externally generated synchronization pulse is detected by the integrated sync pulse detection circuit. The output of a comparator, which is part of the sync pulse detection circuit, provides a digital signal whether a valid synchronization pulse voltage is detected or not.

This digital signal is sampled at the time when the rising edge of the synchronization pulse is inside the sync pulse detection window and has a delay of $t_{\text{tol_detect}}$.

The figure below shows the time correlation of the PSI5 output to the sync pulse.

The total trigger detection time T_{TRIG} on system level is determined by adding up the sensors trigger detection tolerance $t_{\text{tol_detect}}$ and the contributions from the system, as defined in the PSI5 specification [2].

Note: The system contributions to the total trigger detection time T_{TRIG} are not shown in the figure below

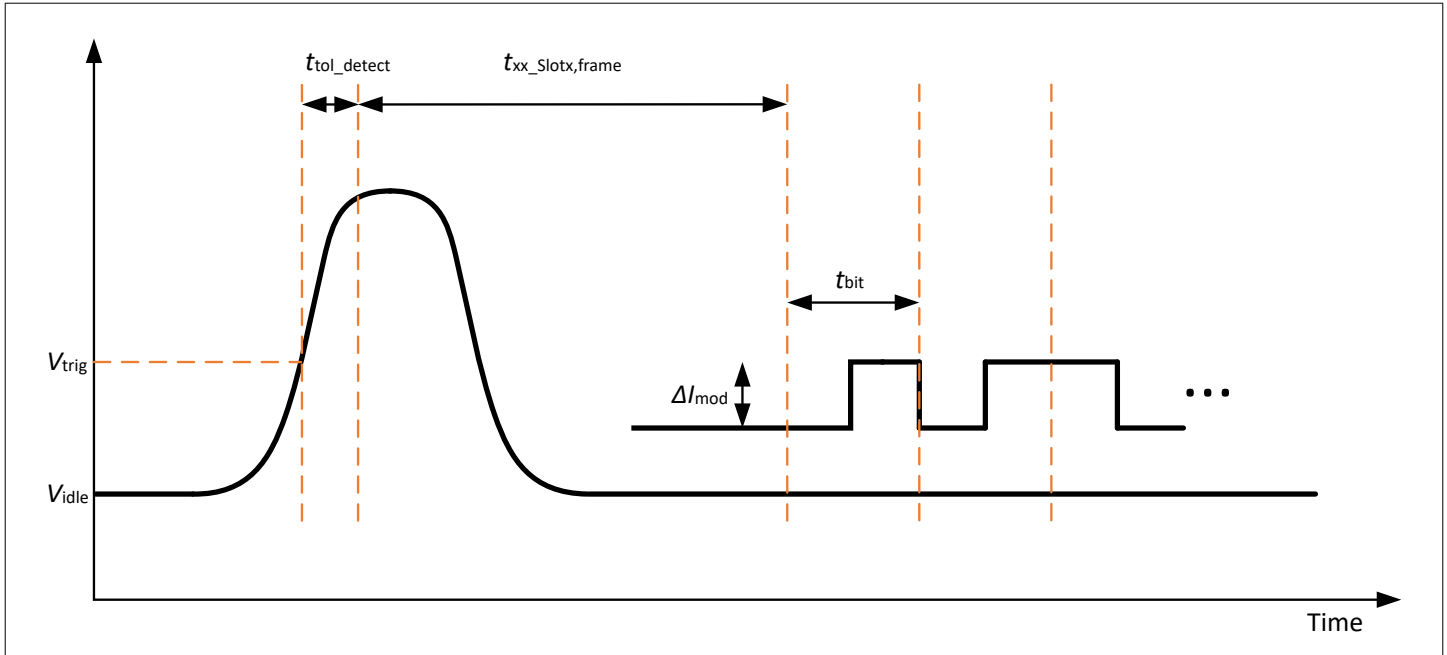


Figure 4 PSIS slot timing

After detecting the rising edge of a sync pulse the sensor observes the voltage level of the synchronization pulse for $n_{\text{sync_det}}$ samples with a sampling frequency of $f_{\text{sync_sampl}}$. If the sample voltage observed is above the specified sync pulse detection threshold V_{trig} an up-counter is incremented by "1". If the line voltage is less than the detection threshold voltage V_{trig} the counter is not incremented. After $n_{\text{sync_det}}$ samples the status of the up-counter is readout. Only if the counter is inside the $n_{\text{sync_detval}}$ range, a valid sync pulse is detected. Otherwise no sync pulse will be detected and the up-counter will be reset.

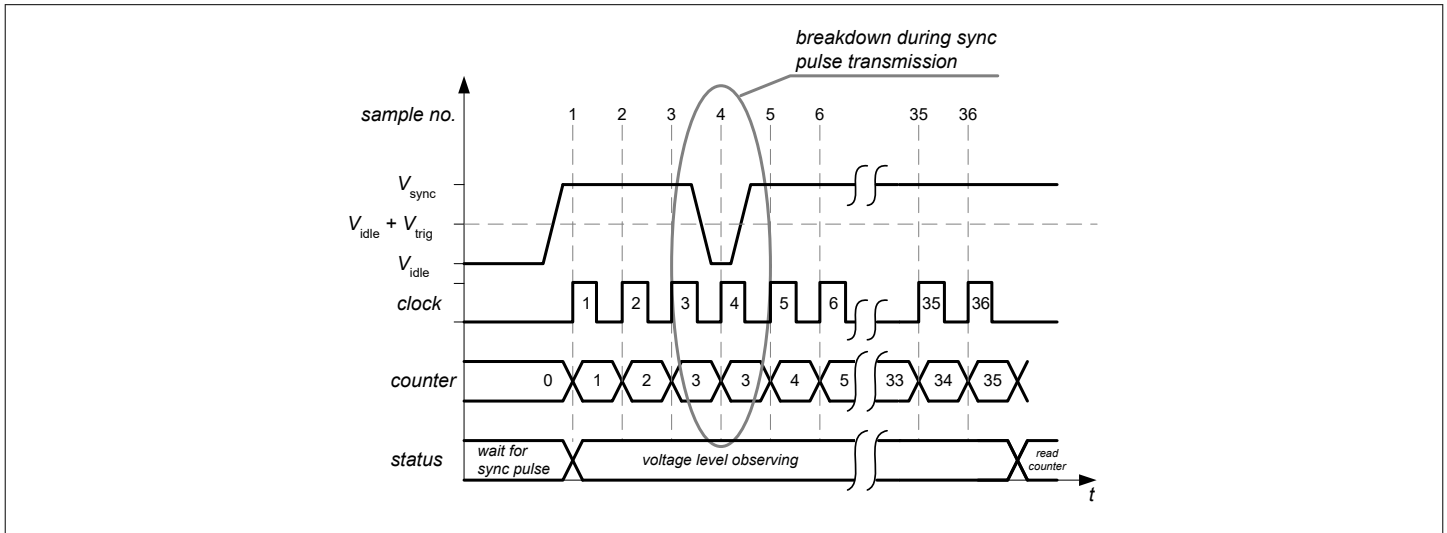


Figure 5 Sync pulse counter functionality

If a valid sync pulse is detected then a Manchester frame is sent out in the programmed time slot. During this time ($t_{\text{sync_off_xxx}}$) no further sync pulses can be detected.
 A sync pulse of minimum 9µs in normal duration is recommended.

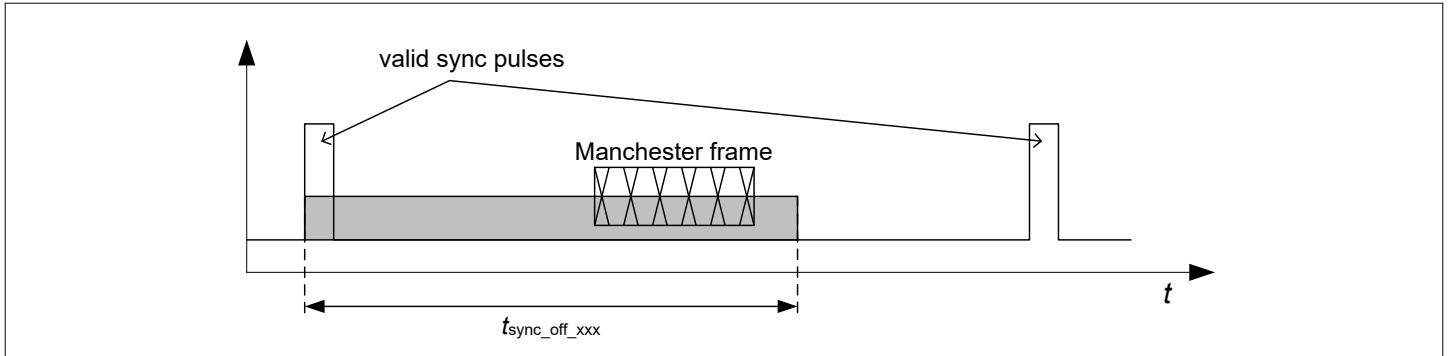


Figure 6 Sync pulse detection off time

4.1.1.3 Asynchronous communication

If the sensor is configured to asynchronous mode, the sensor operates with a defined data rate. The specified data message will be continuously transmitted from the sensor at fixed time intervals (t_{async}). In this mode, only one satellite can be connected per physical channel.

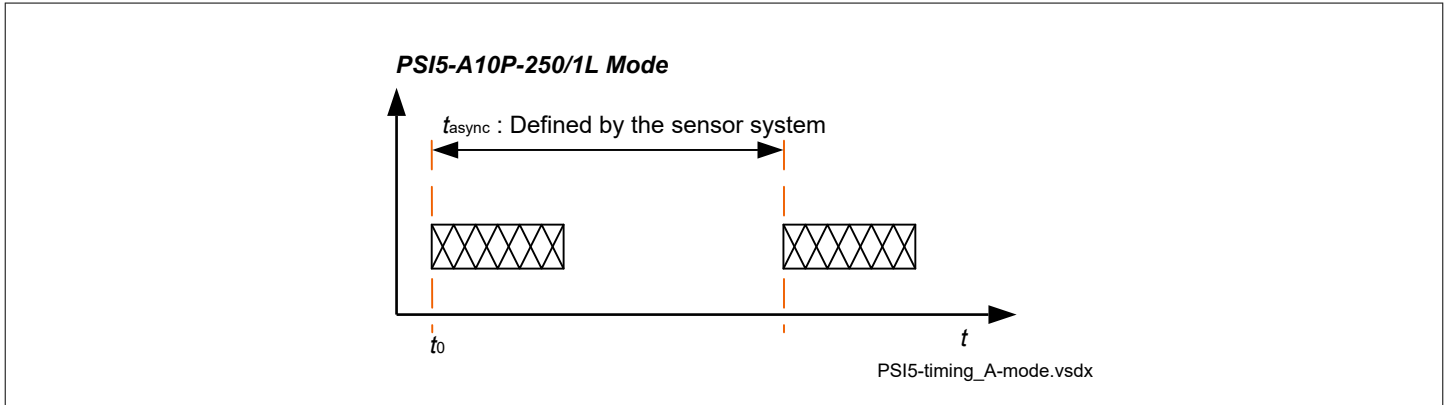


Figure 7 Timing in the asynchronous mode

4.1.2 Data link layer

4.1.2.1 PSI5 protocols

The data link layer is based on PSI5 specified modes described in the technical specification for a peripheral sensor interface [2].

The following modes are available (selectable by EEPROM bit):

Synchronous modes:

- PSI5-P10P-500/3L - single slot mode - 1st or 2nd or 3rd slot
- PSI5-P10P-500/3L - dual slot mode
- PSI5-P10P-500/3L - triple slot mode (reduced VDD only; see Table 5)
- PSI5-P10P-500/4H - single slot mode - 1st or 2nd or 3rd or 4th slot
- PSI5-P10P-500/4H - dual slot mode
- PSI5-P10P-500/4H - triple slot mode (reduced VDD only; see Table 5)
- PSI5-P10P-250/1L
- PSI5-P10P-250/2H - single slot mode - 1st or 2nd slot
- PSI5-P16CRC-500/2L - single slot mode - 1st or 2nd slot
- PSI5-P16CRC-500/2L - dual slot mode (reduced VDD only; see Table 5)

4 Functional block description

- PSI5-P16CRC-500/3H - single slot mode - 1st or 2nd or 3rd slot
- PSI5-P16CRC-500/3H - dual slot mode (reduced VDD only; see [Table 5](#))

Asynchronous modes:

- PSI5-A10P-250/1L

Note: Only the here specified protocols in combination with the operating modes specified in [Chapter 1.2](#) are allowed and verified.

In multi slot mode, the sensor can transmit sensor information in several time slots. The user can select between the transmission of additional p_0 or T_j data or also between transmission of two $\Delta p/p_0$ data sets with different sensitivity. It is possible to select either p_0 or T_j data or to alternate between the two values for each transmission. For details please refer to full version of the technical datasheet.

4.1.2.2 Data protocol (10-bit format)

The default data frame structure is defined by a 13-bit message format. The message consists of two (2) start bits, ten (10) data bits and one (1) parity bit (number of high bits in the binary data and parity value).

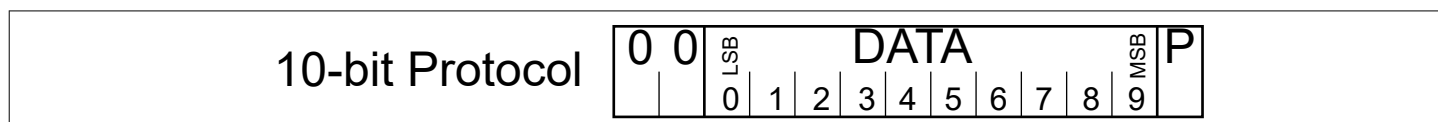


Figure 8 10-bit protocol (13-bit message)

The message bits are described in the table below:

Table 13 Data field 13-bit message

Message Bit	Definition	Logic Level
0 ... 1	start bit 1 and 2	0
2 ... 11	data bit 0 (LSB) ... data bit 9 (MSB)	0, 1
12	parity (even)	0, 1

4.1.2.2.1 Data range

The operation of the device is divided into four phases. Each phase will use its own data range for transmission of data from the sensor to the ECU. The figure below describes the separate data ranges of the 10-bit protocol (13-bit data message). For details on the four phases, please refer to [Chapter 4.1.3](#).

4 Functional block description

Range		dec	hex	Phase 1	Phase 2		Phase 3		Phase 4	Phase 4	PSI5 test mode
					2a	2b optional	3a	3b	dp/p0 data	p0 and T data	
2	Status & Error Messages	511	1FF	reserved (no data)	reserved	reserved	reserved		reserved	reserved	reserved
		...	...				reserved		reserved	reserved	
		501	1F5				reserved		reserved	reserved	
		500	1F4				sensor defect		sensor defect	sensor defect	
		499	1F3				reserved		reserved	reserved	
		...	...				reserved		reserved	reserved	
		489	1E9				sensor busy		reserved	reserved	
		488	1E8				sensor ready		reserved	reserved	
		487	1E7				sensor ready		reserved	reserved	
1	Sensor Output Signal	...	...	reserved (no data)	reserved	reserved	reserved		$\Delta p/p_0$ maximum (Mode 2 & 3)	$p_0 = \max$	reserved
		480	1E0				reserved		...	...	
		307	133				reserved		$\Delta p/p_0$ maximum (Mode 1)	...	
		...	...				reserved		...	...	
		1	001				reserved		$\Delta p/p_0 = 0\%$	$p_0 = \min$	
		0	000				reserved		...	reserved	
		-1	3FF				reserved		...	$T_I = \max$	
		...	...				reserved		$\Delta p/p_0$ minimum (Mode 3)	...	
		-70	3BA				reserved		$\Delta p/p_0$ minimum (Mode 1)	...	
		...	...				reserved		...	...	
		-72	3B8				reserved		$\Delta p/p_0$ minimum (Mode 2 & 3)	$T_I = \min$	
		...	...				reserved		reserved	reserved	
		-102	39A				reserved		reserved	reserved	
		...	...				reserved		reserved	reserved	
		-307	2CD				reserved		reserved	reserved	
		...	...				reserved		reserved	reserved	
3	Block ID's and Data for Initialization	-481	21F	reserved (no data)	reserved	reserved	status 1111		nibble 11111	reserved	status 1111
		...	...				...		...	protocol error	protocol error
		-492	214				...		...	protocol error	protocol error
		...	...				status 0000		nibble 10000	reserved	status 0000
		-496	210				ID code 16		nibble 01111	reserved	ID code 16
		-497	20F				ID code 15		nibble 01110	reserved	ID code 15
		-498	20E				ID code 14		nibble 01101	reserved	ID code 14
		-499	20D				ID code 13		nibble 01100	sensor cell error	sensor cell error
		-500	20C				ID code 12		nibble 01011	reserved	ID code 12
		-501	20B				ID code 11		nibble 01010	reserved	ID code 11
		-502	20A				ID code 10		nibble 01001	reserved	ID code 10
		-503	209				ID code 9		nibble 01000	signal chain error	signal chain error
		-504	208				ID code 8		nibble 00111	reserved	ID code 8
		-505	207				ID code 7		nibble 00110	reserved	ID code 7
		-506	206				ID code 6		nibble 00101	reserved	ID code 6
		-507	205				ID code 5		nibble 00100	p_0 init error	p_0 init error
		-508	204				ID code 4		nibble 00011	reserved	ID code 4
		-509	203				ID code 3		nibble 00010	reserved	ID code 3
		-510	202				ID code 2		nibble 00001	p_0 out of range error	p_0 out of range error
		-511	201				ID code 1		nibble 00000	reserved	ID code 1
		-512	200				ID code 1		nibble 00000	reserved	ID code 1
		...	...				ID code 1		nibble 00000	reserved	ID code 1
		...	...				ID code 1		nibble 00000	reserved	ID code 1
		...	...				ID code 1		nibble 00000	reserved	ID code 1
		...	...				ID code 1		nibble 00000	reserved	ID code 1

Figure 9 Data content overview (10-bit protocol)

4.1.2.3 Data protocol (16-bit format)

When operating in 16-bit operating mode, the data frame structure is defined by a 21-bit message format. The message consists of two (2) start bits, two (2) serial channel bits, fourteen (14) data bits and three (3) CRC check bits.

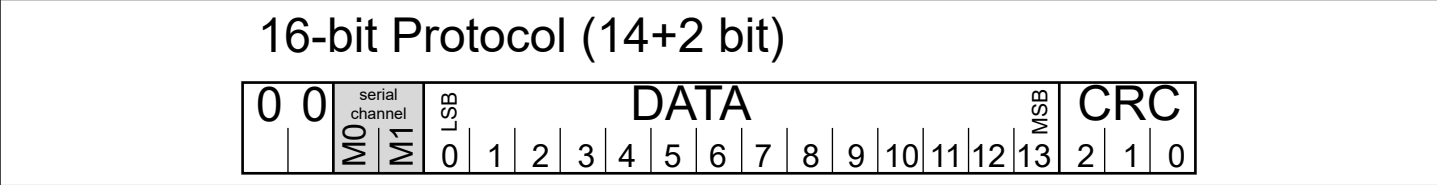


Figure 10 16-bit protocol (21-bit message) in Phase 4

The message bits are described below.

Table 14 Data field 21-bit message

Message Bit	Definition	Logic Level
0 ... 1	start bit 1 and 2	0
2 ... 3	serial channel bits	0, 1
4 ... 17	data bit 0 (LSB) ... data bit 13 (MSB)	0, 1
18 ... 20	CRC check bits (C2, C1, C0)	0, 1

Note: The serial messaging channel is not used and the two bits are fixed to zero ("0").

4.1.2.3.1 CRC calculation

Error detection is realized by a three bit CRC, calculated from the full 16-bit payload bits (14+2 bits). The generator polynomial of the CRC is $g(x) = 1 + x + x^3$ with a binary CRC initialization value "111". Start bits are ignored in the CRC check. The three check bits are transmitted in reverse order (MSB first: C2, C1, C0).

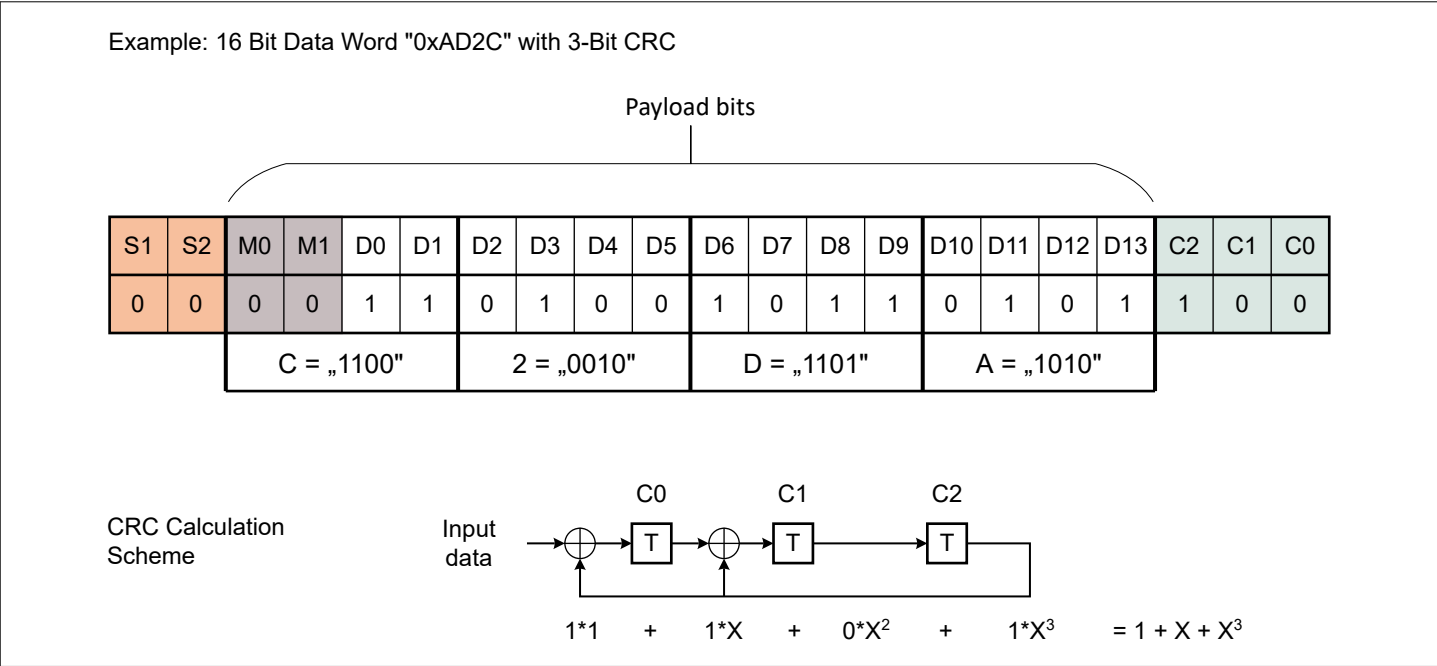


Figure 11 Example for CRC calculation

4.1.2.3.2 Data range scaling

During Phase 2 and Phase 3 as well as for error messages, the serial channel bits are not transmitted. Instead, the full 16-bit word is used to transmit data in the following format:

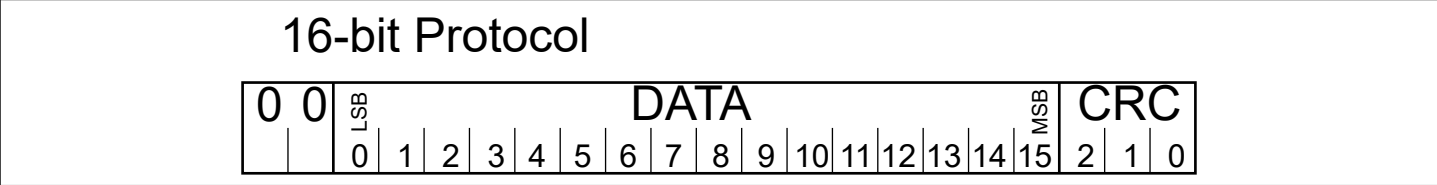


Figure 12 16-bit protocol (21-bit message) in Phase 2 and Phase 3

As data content, the 10-bit status and initialization words are used and extended to the 16-bit word by the following rule:

- The 10-bit word is transmitted in the MSB section of the 16-bit frame
- The 6 LSBs (D5 ... D0) are filled up with the value of the bit corresponding to the "D0" bit in the 10-bit data word.

This allows the possibility to check for stuck bits in the receiver. An example is shown below.

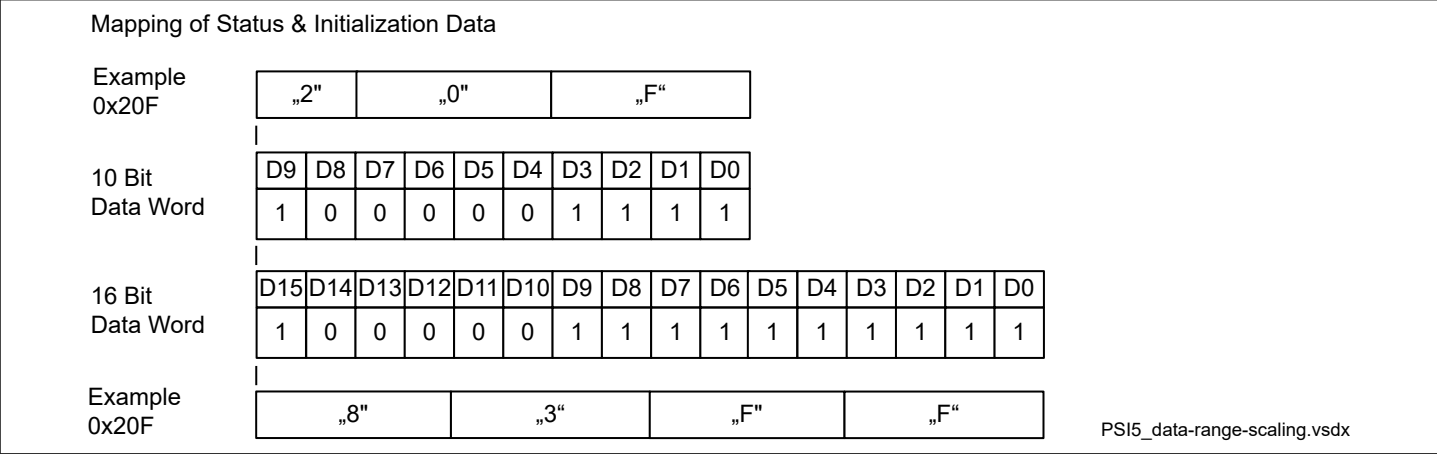


Figure 13 Example: mapping of status and initialization data into a data word

4.1.2.3.3 Data range

The operation of the device is divided into four phases. Each phase will use its own data range for transmission of data from the sensor to the ECU. The figure below describes the separate data ranges of the 16-bit protocol. For details on the four phases, please refer to [Chapter 4.1.3](#).

4 Functional block description

Range		dec	hex	Phase 1	Phase 2		Phase 3		Phase 4
					2a	2b optional	3a	3b	dp/p0 data
2	Status & Error Messages (16-bit)	+32767	0x7FFF			reserved	reserved		reserved
		...	...						
		+32000	0x7D00				sensor defect		sensor defect
		...	...				reserved		reserved
		+31232	0x7A00			sensor busy			
		+31231	0x79FF			sensor ready			
		...	...						
		+30721	0x7801						
1	Sensor Output Signal (14-bit)	+7680	0x1E00	reserved (no data)	reserved	reserved	reserved		
		...	...						
		+2048	0x0800						$\Delta p/p_0$ maximum (Mode 4)
		...	...						...
		+480	0x01E0						$\Delta p/p_0$ maximum (Mode 2 & 3)
		...	...						...
		+307	0x0133						$\Delta p/p_0$ maximum (Mode 1)
		...	...						...
		1	0x0001						...
		0	0x0000						$\Delta p/p_0 = 0\%$
		-1	0x3FFF						...
		...	...						$\Delta p/p_0$ minimum (Mode 1)
		-102	0x039A						...
		...	...						$\Delta p/p_0$ minimum (Mode 2 & 3 & 4)
		-307	0x3ECD						reserved
		...	...						
		-7680	0x2200						
		3	Block ID's and Data for Initialization (16-bit)						-30721
...	...			...					
-31488	0x8500			...	...		protocol error		
...	...			...	...		reserved		
-31744	0x8400			status 0000	nibble 10000				
-31745	0x83FF			ID code 16	nibble 01111				
...	...			...	...		sensor cell error		
-32000	0x8300						reserved		
...	...						signal chain error		
-32256	0x8200						reserved		
...	...						p_0 init error		
-32512	0x8100						reserved		
...	...						p_0 out of range error		
-32641	0x807F								
-32768	0x8000			ID code 1	nibble 00000		reserved		

Note: For data in range 2 and 3, the full 16-bit data word is used.

Figure 14 Data content overview (16-bit message)

4.1.3 PSI5 interface application layer

The following chapter describes the different operation phases of the device in detail.

4.1.3.1 Phase 1

During Phase 1 there is no data transmission.

- Duration: t_{p1}
- No reaction on sync pulses
- Reset and sensor self tests
- Initialization of the p_0 filter (start time is defined with $t_{p0_init_start}$ after internal reset, duration: t_{p0_init}). After the initialization, the decrement / increment filter for p_0 calculation is internally clocked.
- Check for the entry key of the PSI5 test mode.
- Check for test mode entry key, set via SPI command.

Only during Phase 1 it is possible to enter the PSI5 test mode. In order to do this, the ECU has to send a predefined entry key sequence. After successful entry into the PSI5 test mode, the sensor will not continue with Phase 2, but stay in this mode until a reset is issued from the ECU. For details about the PSI5 test mode, please refer to the full version of the datasheet.

4.1.3.2 Phase 2

During Phase 2 the sensor transmits identification tests and runs internal self tests

- Duration: $t_{p2a} + t_{p2b}$
- Phase 2a: Transmission of sensor identification data; repetition of ID data: k
- Phase 2b: based on the test result of the p_0 filter initialization test

Additional information about phase 2b is given in the full version of the datasheet.

4.1.3.2.1 Identification Data Content

During Phase 2a the sensor transmits identification data. The data blocks correspond to D1...D32 as given in the PSI5 standard.

Table 15 Phase 2a data content

Data field	Identifier	Data block	Parameter	Content	Value	Comment
F1	PSI5 protocol version	D1	PSI5 spec	V1.3 or V2.1	xxxx	V1.3 is pre-programmed, but is reprogrammable by the customer
F2	number of data blocks	D2	number of blocks	32 * 4-bit data blocks	0010	fixed in ROM
		D3			0000	
F3	satellite manufacturer code 1	D4, D5	satellite manufacturer code 1	customer programing	xxxx xxxx	customer programmable
F4	sensor type	D6	sensor type	pressure sensor	xxxx	customer programmable
		D7			1000	fixed for $\Delta p/p_0$ data in sense _{out1}

(table continues...)

Table 15 (continued) Phase 2a data content

Data field	Identifier	Data block	Parameter	Content	Value	Comment
					1100	fixed for $\Delta p/p_0$ data in sense _{out2}
					xxxx	customer programmable for p_0 or T_j data
F5	sensor parameter	D8, D9	sensor parameter	customer specific parameters	xxxx xxxx	customer programmable
F6	satellite manufacturer code 2	D10, D11	satellite manufacturer code 2	sensor specific definition	xxxx xxxx	customer programmable
F7	sensor code	D12-D14	sensor code	AK-wide defined device index	xxxx xxxx xxxx	customer programmable
F8	production date	D15	year	Yn: 7 bit (0...99)	Y6 Y5 Y4 Y3	customer programmable
		D16	year / month	Mn: 4 bit (1....12)	Y2 Y1 Y0 M3	
		D17	month / day	Dn: 5 bit (1...31)	M2 M1 M0 D4	
		D18	day		D3 D2 D1 D0	
F9	serial number	D19-D20	serial number	IFX line/lot/serial number	0000 0000	fixed
		D21-D32			xxxx	programmed and locked by the supplier

Note: In multi slot mode, each time slot sends its own ID data. They are identical for each sync pulse and differ only in field D7.

The field F9 contains an unique serial number for each sensor and allows complete tracing of the sensor. This serial number is different from all previous SAB sensor devices (e.g. KP106 ... KP109, KP20x). The device can be identified by the product-ID in nibble D24.

Table 16 Product IDs (D24)

Product name	Product ID
KP305	1101 _b

4.1.3.3 Phase 3

During phase 3, the sensor transmits diagnostics data.

- Duration: $t_{p3a} + t_{p3b}$
- Status information: sensor ok (0x1E7) or error sequence (sensor defect (0x1F4) and error classification frame)
- p_0 transmission
- Phase 3b is optional: Transmission of sensor specific diagnosis data (more information on phase 3b can be found in the full version of the datasheet)

With the 1st frame during Phase 3a the sensor transmits sensor ready (OK, 0x1E7) or in case of a detected error the error sequence (see [Chapter 4.1.3.5](#)). The decision about the sensor status is based on the test results done before.

If no error is detected, the next 4 frames transmit the $p_{0_word_p3}$ value (12 bit value, separated in four 5 bit nibbles).

Table 17 Phase 3a Data Content

Frame No.	Normal operation		Error	
	Function	Code	Function	Code
1	Sensor ready	0x1E7	Sensor defect	0x1F4
2	nibble 0	0x200 ... 0x207	Error Code	0x20x
3	nibble 1	0x208 ... 0x20F	Sensor defect	0x1F4
4	nibble 2	0x210 ... 0x217	Error Code	0x20x
5	nibble 3	0x218 ... 0x21F	...	...

The p_0 value [kPa] can be calculated as follows:

$$p_0 = p_{0_word_p3} \times p_{0_sens_rx} + p_{0_offset}$$

Formula_p0_calculation_Phase3.vsdX

Figure 15 Formula for p_0 calculation in phase 3

If the value is outside the output range, the values are clipped to the minimum/maximum allowed output values ($p_{0_word_p3_lim}$)

The $p_{0_word_p3}$ is defined as follows and based on the output of the p_0 filter.

$$\begin{aligned} p_{0_word_p3} &= d_{11} d_{10} d_9 d_8 d_7 d_6 d_5 d_4 d_3 d_2 d_1 d_0 \\ nibble_0 &= 00 d_{11} d_{10} d_9 \\ nibble_1 &= 01 d_8 d_7 d_6 \\ nibble_2 &= 10 d_5 d_4 d_3 \\ nibble_3 &= 11 d_2 d_1 d_0 \end{aligned}$$

Figure 16 $p_{0_word_p3}$ definition

4.1.3.4 Phase 4

Chapter 4.1.3.5 During normal operation the $\Delta p/p_0$ output value is transmitted via the PSI5 interface. If the normalized relative pressure ($\Delta p/p_0$) under- or overshoots the measurement range ($range_{nomx}$), the $\Delta p/p_0$ value is clipped to the minimum/maximum allowed $\Delta p/p_0$ output value ($\Delta p/p_{0_datx}$). The limit and value depends on the selected operating mode.

In case p_0 is out-of-range or if an error is detected, which still allows Manchester communication, the error sequence is sent. Details see [Error Sequence](#).

Note: As long as the sensor transmits Manchester data, the data is inside the specified range. No incorrect data will be sent, even in the range between the operating voltage and the reset voltage level.

Depending on the selected protocol mode the actual p_0 value or the junction temperature T_j will be transmitted in an additional time slot, in parallel to the $\Delta p/p_0$ value. If the values are outside the output range, the values are clipped to the minimum/maximum allowed output values ($T_{word_p4_lim}$ or $p_{0_word_p4_lim}$).

$$p_0 = 8 \times p_{0_word_p4} \times p_{0_sens_rx} + p_{0_offset}$$

Formula_p0_data_Phase4.vsdX

Figure 17 Formula for p_0 data in phase 4

$$T_j = (T_{word_p4} + 512) \times T_{j_sens} + T_{j_offset}$$

Formula_Tj_Phase4.vsdX

Figure 18 **Formula for T_j data in phase 4**

4.1.3.5 Error sequence

In case of a detected error and Manchester communication is still enabled, the error sequence is sent in Phase 3 and Phase 4. The error sequence consists of the following two frames:

- 1st frame: "Sensor defect" message (0x1F4)
- 2nd frame: Error code (see more information in the full version of the datasheet)

This error sequence is sent until a power down is triggered. In case of more than one error at the same time, only the error with the highest priority is reported in the PSI5 error sequence.

4.2 Micro break functionality

The micro break control is optional and can be achieved by connecting an external buffer capacitor to the CAP pin of the device. This buffer capacitor provides energy for correct operation during micro breaks. The capacitor is charged to maximum $V_{DD} - V_{drop}$. The load current for the buffer capacitor is limited by the resistor R_{CAP} .

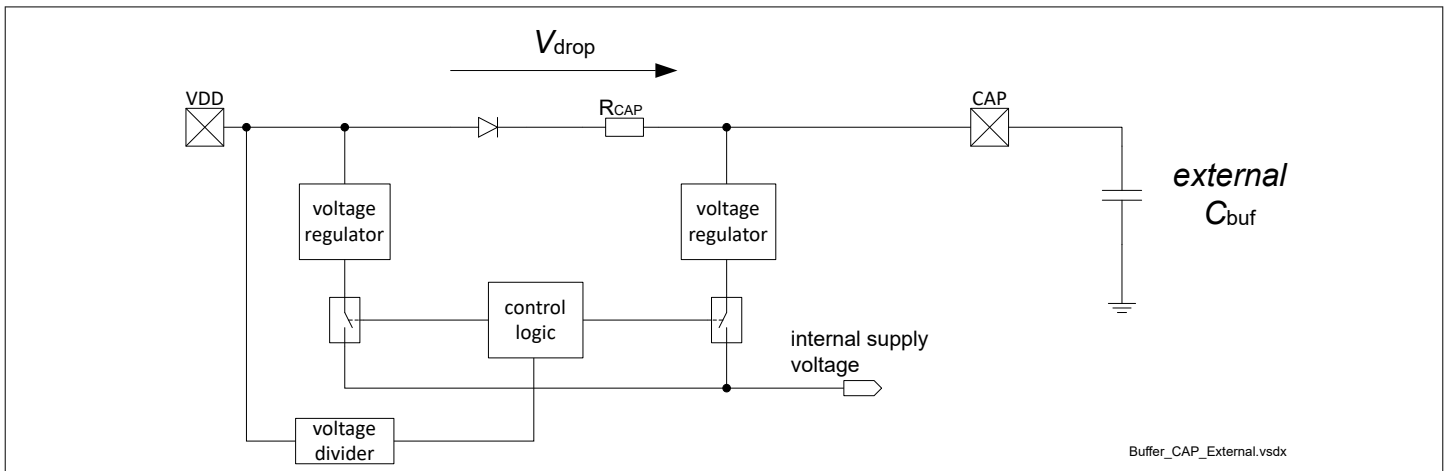


Figure 19 **Simplified block level diagram for micro break functionality**

A diode prohibits current from conducting into the wrong direction, possibly interfering with the data transmission. The micro break control is part of the voltage regulator concept.

As long as the sensor transmits Manchester data, the data is inside the specified range. No incorrect data will be sent, even in the range between the operating voltage and the reset voltage level.

The size of the capacitor depends on the required micro break timing $t_{\mu b}$ and can be calculated by the following formula:

$$t_{\mu b} = \frac{(V_{DD} - V_{drop} - V_{\mu b_drop}) \cdot C_{buf}}{I_{VDD}}$$

Figure 20 **Formula for micro break time calculation**

The micro break function is activated when the voltage on the V_{DD} pin is below $V_{\mu b}$. Then the voltage regulator is supplied from the C_{buf} capacitor.

In the synchronous mode the sync pulse voltage is also used to charge the buffer capacitor. Therefore the buffer capacitor's charge is higher than in the asynchronous mode, where only the supply voltage is provided. The given formula is not considering the additional charge by the sync pulse, this formula is only valid for a direct current supply. The influence of the sync pulse charging the buffer capacitor depends on the sync pulse duration and voltage level, as well as the type of buffer capacitor used and the internal resistance of the capacitor. Therefore, a formula is not given.

Manchester modulation is interrupted during the active micro break mode. The energy of the buffer capacitor is not spend for the Manchester modulation. As soon as V_{DD} returns to normal operating conditions, the current modulator starts working immediately.

If the ECU wants to force a reset of the sensor, the voltage on the supply pin must be hold below $V_{\mu b_min}$ for a time longer than $t_{\mu b}$.

4.3 Test modes

The device has two different test modes:

- The PSI5 test mode is the main customer interface to program the EEPROM during production.
- The SPI test mode is used by Infineon only.

Entry into test mode is only possible during Phase 1. While being in test mode, no normal sensor operation is possible and the sensor will stop sending $\Delta p/p_0$ data.

5 Application information

5.1 Potential target applications

The device is used to detect the pressure change inside a door during a side crash, in tube systems used for pedestrian protection- or front crash detection systems and other similar applications.

The device is used to detect the pressure change inside a door during a side crash and other similar applications.

5.2 Application example

The figure below shows the application example for a restraint system.

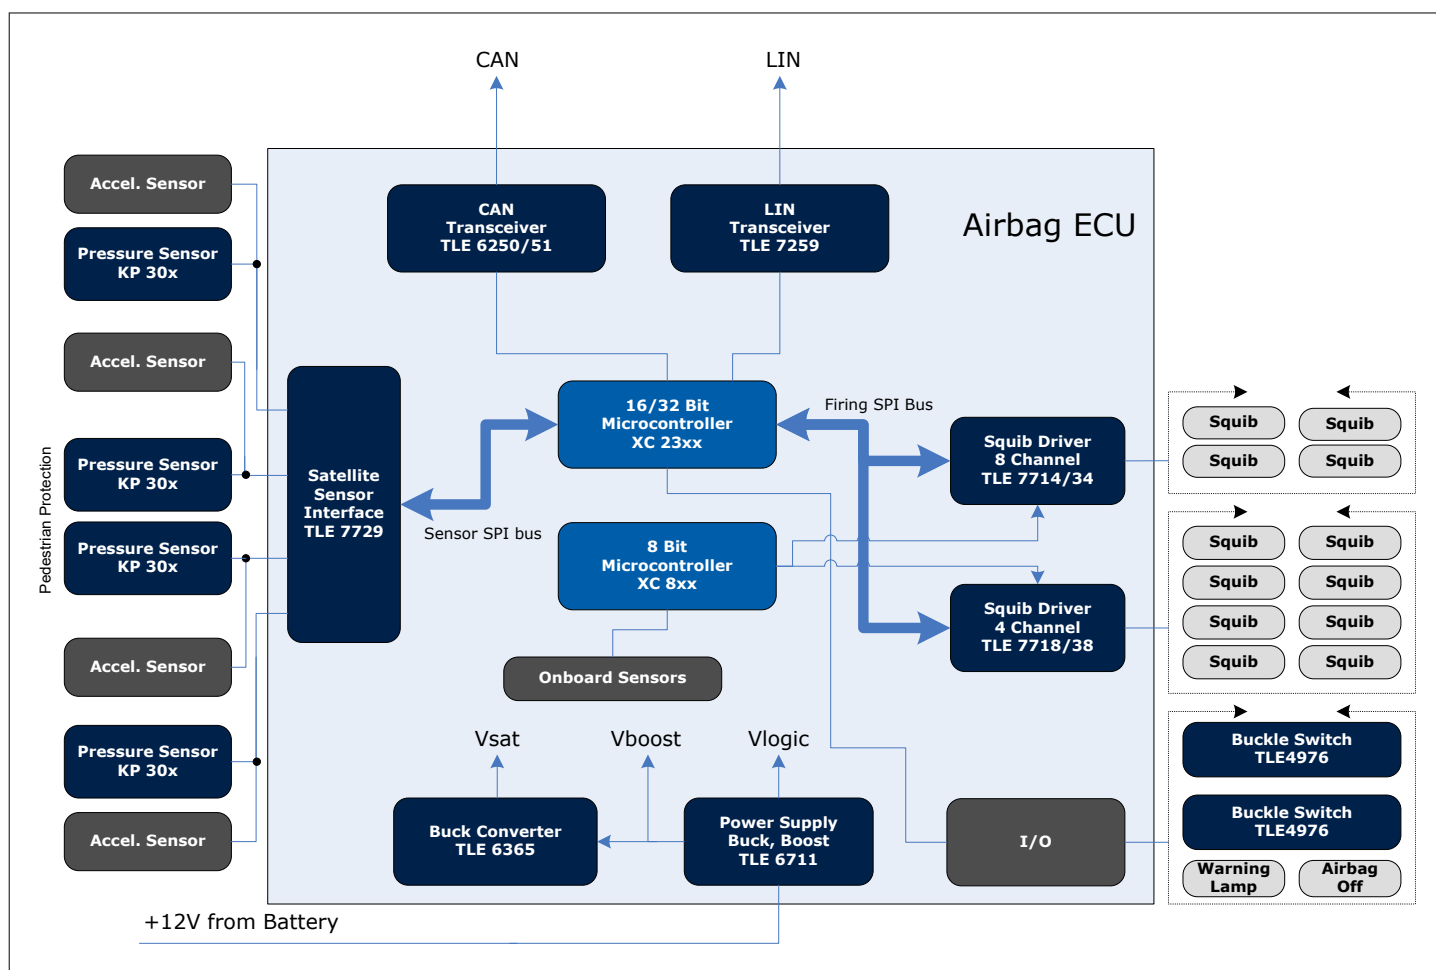


Figure 21 Application example for a restraint system

5.3 Application circuit example

The capacitors C_1 and C_2 have to be placed as close to the chip as possible. Any long distances may have an influence on the EMC performance. C_{buf} is only necessary to prevent voltage loss during micro breaks.

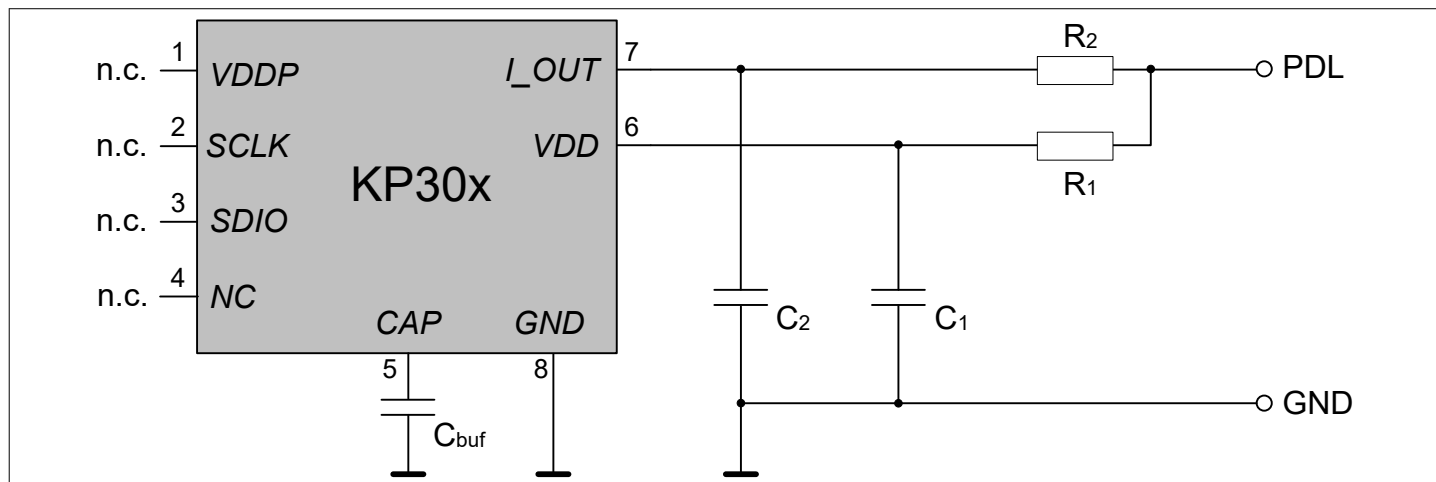


Figure 22 Application circuit example (PG-DSOF-8-164)

The digital pins (VDDP, SCLK, SDIO) have an internal pull-up or pull-down resistor (R_{pu} , R_{pd}) and therefore normal operation must be with floating pins (in case of an open GND wire, the floating pins prevent from a cross grounding through the corresponding ESD diodes). The traces should be spaced sufficiently to avoid shorts between the serial interface and the high voltage pins of the device.

To avoid overheating of the sensor, a maximum temperature difference from sensor-ambient to module-ambient of T_{rise_mod} has to be ensured by the satellite design.

Table 18 Application circuit components

Component	Value	Unit	Tolerance
R_1	47	Ω	+/-5%
R_2	47	Ω	+/-5%
C_1	15	nF	+/-20%
C_2	2.2	nF	+/-20%
C_{buf}	see Chapter 4.2		

5.4 Electro magnetic compatibility (EMC)

The device is characterized according to the EMC requirements described in the "Generic IC EMC Test Specification" [4].

System EMC performance on system level is dependent on the module design and the ECU implementation. The device is capable to pass the system tests according to the AK-LV - EMC specification [5] with the application circuit defined in [Chapter 5.3](#)

6 Package information

For passivation the sensor die is covered with a transparent silicone gel. Bubbles adjacent to the bond wires are not allowed (delivery status). The bond wires will be completely covered by gel. The surface of the gel is smooth. The sensor package is compliant to RoHs.

6.1 Package outline

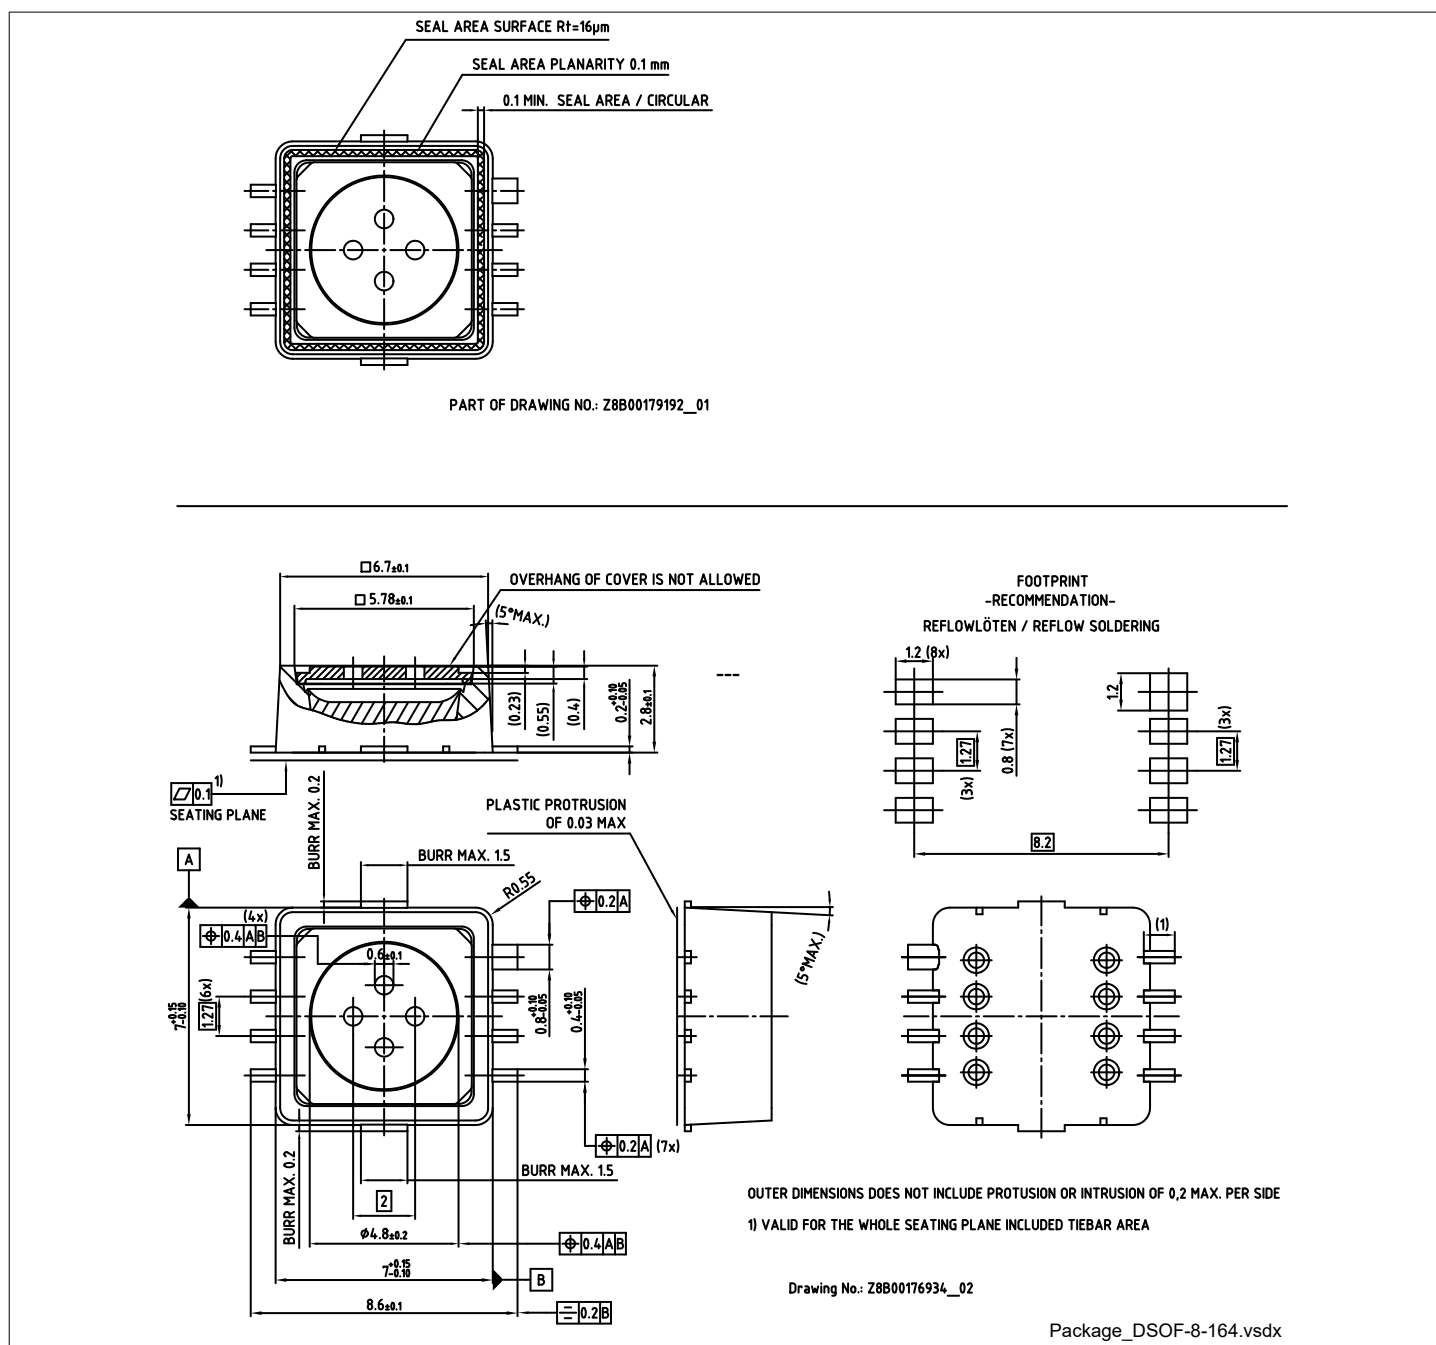


Figure 23 PG-DSOF-8-164 package outline (all dimensions in mm)

6.2 Pick and place info

The following chapter gives information about the pick and place capability of the PG-DSOF package.

6.2.1 Component placement

Although the self-alignment effect due to the surface tension of the liquid solder will support the formation of reliable solder joints, the components have to be placed accurately according to their geometry. Positioning the packages manually is not recommended, but it is possible.

For the PG-DSOF package with a pad width of 0.4 mm and a pitch of 1.27 mm, an automatic pick-and-place machine is recommended to achieve reliable solder joints.

The device is delivered in tape and reel packing which is suitable for being used in pick-and-place equipment.

The pressure difference between the inside and the outside of the package should not exceed p_{diff_max} .

6.2.2 Nozzle

A pick-up nozzle suitable for the package body size should be used. Regarding the PG-DSOF package it is recommended that the used nozzle seals on the package rim. If a smaller nozzle is used this may lead to increased force in the package center, nozzle shape and size are more critical in this case.

For the PG-DSOF pick-and-place nozzle, the following should be considered:

- a dynamic vacuum pressure pulse of min. 10 kPa can be applied.
- the nozzle should be sealed on the package rim.

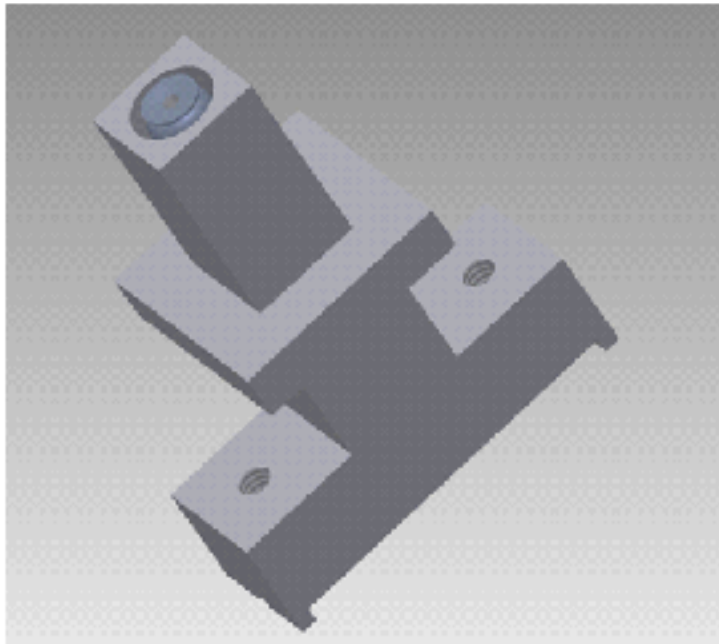


Figure 24 Recommended pick-up nozzle for PG-DSOF package

If it is not possible to use nozzles with sealing on the package rim, please keep in mind that:

- push/pull forces on the lid higher than F_{pull_off} and F_{push_in} must be avoided
- nozzle shapes are used, which consider a pressure inlet diameter of the PG-DSOF package of 2.5 mm.

The figure below shows different nozzle shapes for the PG-DSOF package if the nozzle is not sealed on the package rim. In this case nozzle shapes must be used where vacuum applying is possible, that means the holes in the lid have to be taken into account.

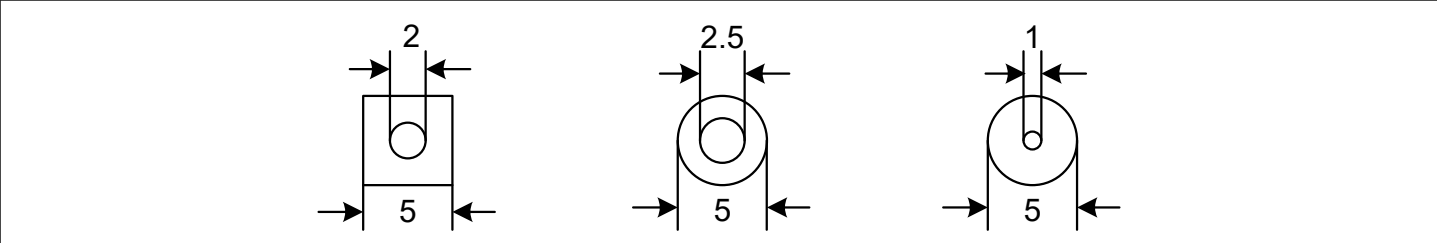


Figure 25 Examples of nozzle shapes for sealing on the lid

6.3 Soldering profile

The device is mountable in a standard reflow-soldering process. The allowed temperature profile is shown below.

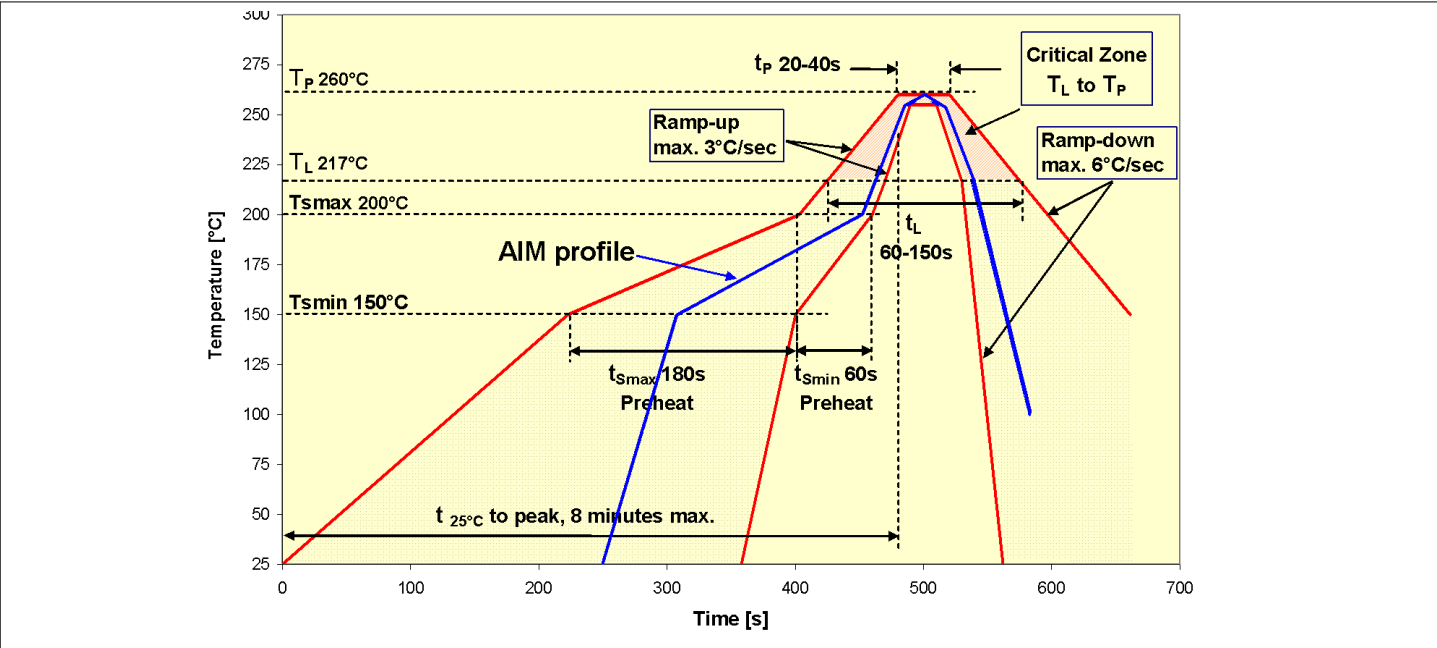


Figure 26 Reflow profile IPC/JEDEC J-STD-020C Pb-free assembly, small body, 260°C (+0/-5°C)

6.4 Identification code

The identification code for the device is on the same side of the package as pin GND.
The data matrix code contains a unique serial number. For backtracking the supplier can use a reference table to correlate the data matrix code number with the IFX identification number stored within the EEPROM.

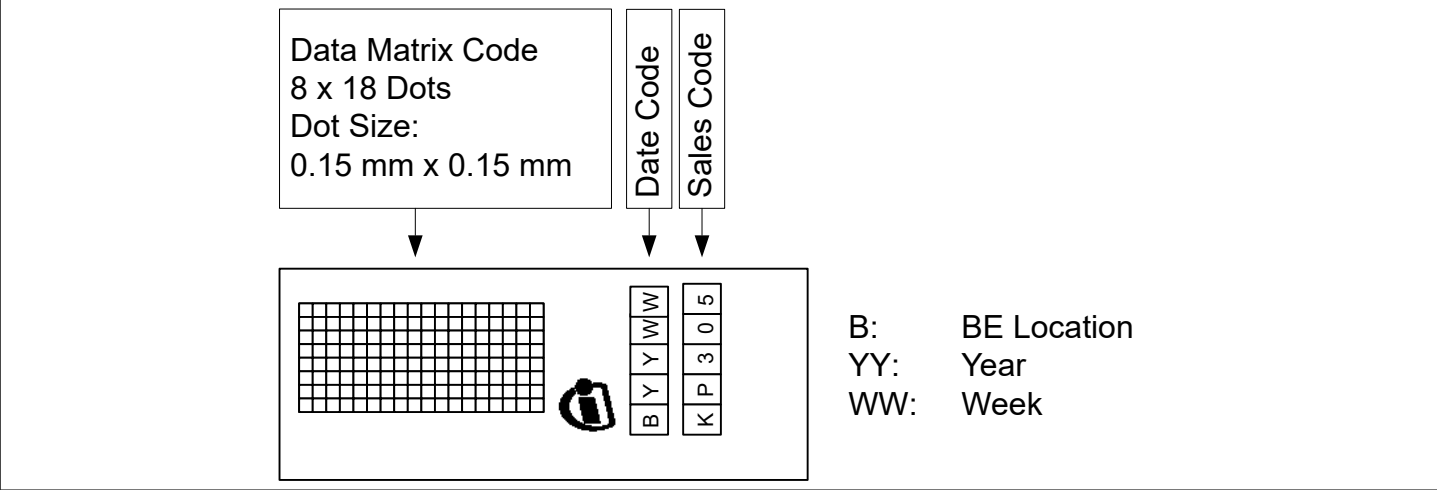


Figure 27 Identification code for KP305



7 References

Table 19 References	
Number	Bibliography
[1]	PSI5 Specification, V1.3, 29.07.08
[2]	PSI5 Specification, V2.1, 08.10.2012
[3]	PSI5 Substandard Airbag, V2.1, 05.10.2012
[4]	BISS, "Generic IC EMC Test Specification", Version 1.0, July, 6th 2004
[5]	AK-LV 27 / AK-LV 29, Part 3 "EMC Requirements", V2.06, March, 9th 2011



8 Revision history

Table 20 Revision history

Document revision	Date of release	Description of changes
1.00	2024-11-11	Initial release of technical product description extracted from the datasheet of KP305, Rev 1.20

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2024-11-11

Published by

Infineon Technologies AG
81726 Munich, Germany

© 2024 Infineon Technologies AG
All Rights Reserved.

Do you have a question about any aspect of this document?

Email: erratum@infineon.com

Document reference
IFX-ton1729160740592

Important notice

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenhheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

Warnings

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.