



K5_5


Capacitive Humidity Sensor

Optimal for low humidity measurement

Benefits & Characteristics

- Very stable at low humidity
- High chemical resistance
- Wide temperature range
- Condensation resistant
- Very low drift
- Customer-specific sensor available upon request

Illustration¹⁾

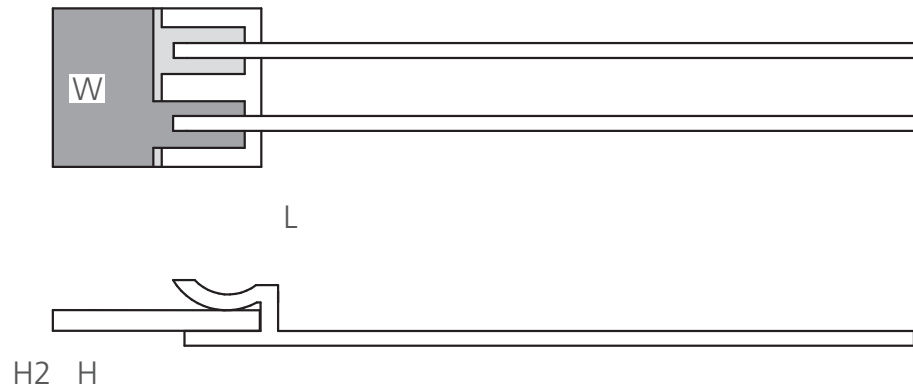

1) For actual size, see dimensions

Technical Data

Dimensions (L x W x H / H2 in mm):	5.0 x 3.81 x 0.4 / 1.2
Operating humidity range:	0 % RH to 100 % RH
Operating temperature range:	-40 °C to +150 °C
Capacitance (C ₃₀)*:	200 pF ±50 pF (at 30 % RH and +23 °C)
Typical sensitivity (at C ₃₀ = 200 pF):	0.4 pF/% RH (15 % RH to 90 % RH)
Loss factor:	< 0.01 (at 23 °C, at 10 kHz, at 90 % RH)
Linearity error:	< 1.5 % RH (15 % RH to 90 % RH at +23 °C after one point calibration)
Hysteresis:	< 1.5 % RH
Response time t ₆₃ :	< 5 s (50 % RH to 0 % RH at +23 °C)
Temperature dependence (nominal):	$\Delta \% RH = (B1 \times \% RH + B2) \times T [^{\circ}C] + (B3 \times \% RH + B4)$ B1 = 0.00004 [1/°C] B2 = 0.1842 [% RH/°C] B3 = -0.0010 B4 = -4.2370 [% RH]
Measurement frequency range:	1 kHz to 100 kHz (recommended 10 kHz)
Maximal supply voltage:	< 12 V _{pp} AC



Signal form: alternating signal without DC bias

Connection:* CuP-SIL wire post-plated with Sn, 10 mm

Packaging: packed in a blister of 5 pcs

* Customer-specific alternatives available

The calibration of the sensor must be done 5 days after soldering at the earliest.

Product photo



Order Information - SIL (CuP-SIL wire post-plated with Sn, 10 mm)

	K5_5 (200pF \pm 50pF)
Order code	153420
Mouser Product number	916-153420



Innovative Sensor Technology IST AG, Stegrütistrasse 14, 9642 Ebnat-Kappel, Switzerland
Phone: +41 71 992 01 00 | Fax: +41 71 992 01 99 | Email: info@ist-ag.com | www.ist-ag.com

All mechanical dimensions are valid at 25 °C ambient temperature, if not differently indicated • All data except the mechanical dimensions only have information purposes and are not to be understood as assured characteristics • Technical changes without previous announcement as well as mistakes reserved • The information on this data sheet was examined carefully and will be accepted as correct; No liability in case of mistakes • Load with extreme values during a longer period can affect the reliability • The material contained herein may not be reproduced, adapted, merged, translated, stored, or used without the prior written consent of the copyright owner • Typing errors and mistakes reserved • Product specifications are subject to change without notice • All rights reserved