



3-wire sensor up to 200°C and 400 °C


Platinum sensor with wires

For low to medium temperatures

Benefits & Characteristics

- Compensation of the wire resistance by 3-wire construction
- Excellent long-term stability
- Low self-heating
- Long insulated wires
- Well suited for applications with tight tolerances
- Fast response time
- Metallized backside available
- Customer-specific sensor available upon request

Illustration¹⁾

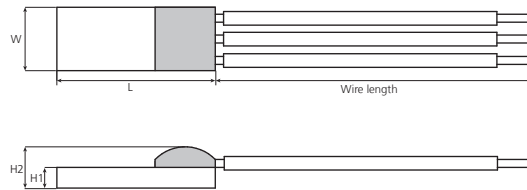

1) For actual size, see dimensions

Technical Data

Operating temperature range:	-50 °C to +200 °C (2I)
	-200 °C to +400 °C (4W)
Nominal resistance:*	100 Ω at 0 °C
Characteristics curve:*	3850 ppm/K
Long-term stability:	< 0.04 % at 1000 h at maximal operating temperature
Tolerance class (dependent on temperature range):*	IST AG reference
	IEC 60751 F0.15 A
	IEC 60751 F0.3 B
	IEC 60751 F0.6 C
Connection:*	-50 °C to +200 °C Cu/Ag-wire, AWG30, PTFE-insulated (solderable, weldable, crimpable), 5 mm stripped
	-200 °C to +400 °C Ag wire, Ø 0.25 mm
Recommended applied current: ¹⁾	1 mA at 100 Ω
¹⁾ Self-heating must be considered	0.5 mA at 500 Ω
	0.3 mA at 1000 Ω
Other alternatives:*	Metallized backside
	Housed in round ceramics (for dry environments only)
	Grouped and paired
	Substrate thickness

* Customer-specific alternatives available



Order Information - 3 wires, 2I (Cu/Ag-wire, AWG30, PTFE-insulated), 5 mm stripped

Chip Size:	Dimensions (L x W x H1 / H2 in mm) L $\pm$ 0.2 mm, W $\pm$ 0.2 mm, H1 $\pm$ 0.1 mm, H2 $\pm$ 0.3 mm	Wire length	F0.15 (class A)	F0.3 (class B)	F0.6 (class C)
------------	--	-------------	-----------------	----------------	----------------

Nominal resistance: 100 Ω at 0 °C

232	2.3 x 2 x 0.65 / 1.3	200	On request	On request	On request
Order code					
520	5.0 x 2.1 x 0.65 / 1.2	200	On request	P0K1.520.2I.B.200-3	On request
Order code				100948	
Former order code				010.02200	
232	2.3 x 2 x 0.65 / 1.3	450	On request	On request	On request
Order code					
520	5.0 x 2.1 x 0.65 / 1.2	450	P0K1.520.2I.A.450-3	P0K1.520.2I.B.450-3	P0K1.520.2I.C.450-3
Order code			100962	100174	100662
Former order code			010.02231	010.00112	010.01339
232	2.3 x 2 x 0.65 / 1.3	600	On request	On request	On request
Order code					
520	5.0 x 2.1 x 0.65 / 1.2	600	On request	P0K1.520.2I.B.600-3	P0K1.520.2I.C.600-3
Order code				100547	100663
Former order code				010.01009	010.01340

Nominal resistance: 1000 Ω at 0 °C

232	2.3 x 2 x 0.65 / 1.3	200	On request	On request	On request
Order code					
520	5.0 x 2.1 x 0.65 / 1.2	200	On request	On request	On request
Order code					
232	2.3 x 2 x 0.65 / 1.3	450	On request	On request	On request
Order code					
520	5.0 x 2.1 x 0.65 / 1.2	450	On request	On request	On request
Order code					
232	2.3 x 2 x 0.65 / 1.3	600	On request	On request	On request
Order code					
520	5.0 x 2.1 x 0.65 / 1.2	600	On request	On request	On request
Order code					



Order Information - 3 wires, 4W (Ag wire, Ø 0.25 mm)

Chip Size:	Dimensions (L x W x H1 / H2 in mm) L ±0.2 mm, W ±0.2 mm, H1 ±0.1 mm, H2 ±0.3 mm	Wire length	F0.15 (class A)	F0.3 (class B)	F0.6 (class C)
------------	--	-------------	-----------------	----------------	----------------

Nominal resistance: 100 Ω at 0 °C

232	2.3 x 2 x 0.65 / 1.3	200	On request	On request	On request
Order code					
520	5.0 x 2.1 x 0.65 / 1.2	200	On request	On request	On request
Order code					
232	2.3 x 2 x 0.65 / 1.3	450	On request	On request	On request
Order code					
520	5.0 x 2.1 x 0.65 / 1.2	450	On request	On request	On request
Order code					
232	2.3 x 2 x 0.65 / 1.3	600	On request	On request	On request
Order code					
520	5.0 x 2.1 x 0.65 / 1.2	600	On request	P0K1.520.4W.B.600-3	On request
Order code				100175	
Former order code				010.00116	
538	5.0 x 3.8 x 0.65 / 1.3	600	On request	P0K1.538.4W.B.600-3	P0K1.538.4W.C.600-3
Order code				100182	100666
Former order code				010.00125	010.01385

Nominal resistance: 1000 Ω at 0 °C

232	2.3 x 2 x 0.65 / 1.3	200	On request	On request	On request
Order code					
520	5.0 x 2.1 x 0.65 / 1.2	200	On request	On request	On request
Order code					
232	2.3 x 2 x 0.65 / 1.3	450	On request	On request	On request
Order code					
520	5.0 x 2.1 x 0.65 / 1.2	450	On request	On request	On request
Order code					
232	2.3 x 2 x 0.65 / 1.3	600	On request	On request	On request
Order code					
520	5.0 x 2.1 x 0.65 / 1.2	600	On request	On request	On request
Order code					

Additional Documents

Application Note:	Document name: ATP_E
-------------------	-------------------------



Order Information

Platinum sensor

Secondary reference

Material

P = Platinum

TCR

= Pt 3850 ppm/K G = Pt 3911 ppm/K
U = Pt 3750 ppm/K W = Pt 3850 ppm/K (extended operating temperature range in class A)

Resistance in Ω at 0 °C

Size in mm

Operating temperature range

1 = -50 °C to +150 °C	6 = -200 °C to +600 °C
2 = -50 °C to +200 °C	7 = -200 °C to +750 °C
3 = -200 °C to +300 °C	8 = -200 °C to +850 °C
4 = -200 °C to +400 °C	10 = -70 °C to +1000 °C

Connections

S = SIL	FK = flat wire customer-specific
I = insulated wire	SW = perpendicular wire
K = customer-specific	L = insulate stranded wire
W = wire	E = enameled Cu-wire
FW = flat wire	

Tolerance class

A = IEC 60751 F0.15	K = customer-specific
B = IEC 60751 F0.3	P = pair
C = IEC 60751 F0.6	G = group
Y = IEC 60751 F0.1	

Wire length in mm (-x: amount of wires if more than 2)

Special

T = substrate thickness 0.25 mm	M = metallized backside
D = substrate thickness 0.38 mm	U = inverted welding
R = round housing	S = special
W = sintered powder	

P OK1. 520. 2 I. B. 450-3



Innovative Sensor Technology IST AG, Stegrütistrasse 14, 9642 Ebnat-Kappel, Switzerland
Phone: +41 71 992 01 00 | Fax: +41 71 992 01 99 | Email: info@ist-ag.com | www.ist-ag.com

All mechanical dimensions are valid at 25 °C ambient temperature, if not differently indicated • All data except the mechanical dimensions only have information purposes and are not to be understood as assured characteristics • Technical changes without previous announcement as well as mistakes reserved • The information on this data sheet was examined carefully and will be accepted as correct; No liability in case of mistakes • Load with extreme values during a longer period can affect the reliability • The material contained herein may not be reproduced, adapted, merged, translated, stored, or used without the prior written consent of the copyright owner • Typing errors and mistakes reserved • Product specifications are subject to change without notice • All rights reserved

DTP200_400_3-Wires_E2.3.1 | Temperature Platinum | 200°C Series, 3-wire sensor

4/4