

110 WATTS

SINGLE OUTPUT AC-DC

FEATURES:

- Compact 3.0" x 5.0" x 1.25" Size
- 3 Year Warranty
- Universal 85-264V Input
- Single Output
- 90% Peak Efficiency
- 87% Average Efficiency
- <300mW No Load Input Power
- IEC 60601-1 3rd ed. Medical Cert.
- IEC 62368-1 2nd ed. Certification
- IEC 60601-1-2 4th ed. EMC
- Class B Emissions per EN55011/32
- 0-70°C Operating Temperature
- RoHS Compliant
- Optional Chassis/Cover



CHASSIS/COVER



OPEN FRAME

SAFETY SPECIFICATIONS



Underwriters Laboratories
File E137708/E140259

UL 62368-1:2014, 2nd Edition
CAN/CSA-C22.2 No. 62368-1-14, 2nd Edition
AAMI/ANSI ES60601-1:2005(R) 2012(R)2021
CAN/CSA-C22.2 No. 60601-1:2014-2022



CB Reports/Certificates (including all
National and Group Deviations)

IEC 62368-1:2014, 2nd Edition
IEC 60601-1:2005/A1:2012



TUV SUD America

EN 62368-1:2014, 2nd Edition
EN 60601-1:2006/A1:2013



Low Voltage Directive (2014/35/EU of February 2014)
RoHS Directive (Recast) (2015/863/EU of March 2015)



Electrical Equipment (Safety) Regulations 2016 SI No. 1101
Restriction of the Use of Certain Hazardous Substances in EEE Regulations
2012 SI No. 3032 + 2019 SI No.492

MODEL LISTING

| MODEL | OUTPUT | P _{OUT} |
|--------------|----------|------------------|
| GRN-110-1001 | 3.3V/22A | 73W |
| GRN-110-1002 | 5.0V/22A | 110W |
| GRN-110-1003 | 12V/9.2A | 110W |
| GRN-110-1004 | 15V/7.3A | 110W |
| GRN-110-1005 | 24V/4.6A | 110W |
| GRN-110-1006 | 28V/3.9A | 110W |
| GRN-110-1007 | 48V/2.3A | 110W |

ORDERING INFORMATION

Consult factory for alternate output configurations.
Please specify the following optional features when ordering:

CH - Chassis
CO - Cover

OVP - Overvoltage Protection

GRN-110

OUTPUT SPECIFICATIONS

| | | |
|------------------------------------|---|------------------------|
| Output Power at 50°C _{T1} | 110W | 85-264 V _{IN} |
| (See Derating Chart) | | |
| Voltage Centering | ±0.5% | (Output at 50% load) |
| Voltage Adjust Range | 95-105% | |
| Load Regulation | ±0.5% | (0-100% load change) |
| Source Regulation | 0.5% | |
| Ripple & Noise | 1.0% | (1001, 1002 < 3%) |
| Turn On Overshoot | None | |
| Transient Response | Output recovers to within 1% of initial set point due to a 50% step load change, 500μs maximum, 5% maximum deviation. (maximum deviation on 1001-8%, 1002-6%) | |
| Overvoltage Protection | Latching, Between 110% and 150% of rated output voltage (optional) | |
| Overpower Protection | 110% rated P _{OUT} min, cycle on/off, auto recovery | |
| Hold-Up Time | 16ms typical, full power, 115V input | |
| Start-Up Time | 1 sec., 115/230V input | |
| Output Rise Time | 50ms typical | |
| Minimum Load | No minimum load required | |

INPUT SPECIFICATIONS

| | |
|-----------------------|---|
| Protection Class | I |
| Source Voltage | 85-264 VAC (see derating chart) |
| Frequency Range | 47-63 Hz |
| Input Protection(s) | Internal 4A time delay fuse, 1500A breaking capacity |
| Peak Inrush Current | 50A max. at 230 V |
| Peak Efficiency | 90% |
| Average Efficiency | 87% (1003-1007), 86% (1002), 82% (1001) |
| Light Load Efficiency | 85%, 115/230 V _{IN} , 33% power (1001 > 81%) |
| No Load Input Power | <0.3W, 115/230 V _{IN} , no load (1001<0.5W) |

ENVIRONMENTAL SPECIFICATIONS

| | |
|-------------------------------------|---|
| Cooling | Free air convection |
| Ambient Operating Temperature Range | 0°C to + 70 °C |
| Derating | see derating chart |
| Ambient Storage Temp. Range | -40°C to +85°C |
| Operating Relative Humidity Range | 20-90% non-condensing |
| Altitude | 3,000m ASL Operating 12,192m ASL Non-Operating |
| Temperature Coefficient | 0.02%/°C |
| Vibration | 2.5G swept sine, 7-2000Hz, 1 octave/min, 3 axis, 1 hour each. |
| Shock | 20G 11 ms, 3 axis, 3 each direction. |

GENERAL SPECIFICATIONS

| | |
|----------------------------|--|
| Means of Protection | |
| Primary to Secondary | 2MOPP (Means of Patient Protection) |
| Primary to Ground | 1MOPP (Means of Patient Protection) |
| Secondary to Ground | Operational Insulation(Consult factory for 1MOPP) |
| Dielectric Strength(7, 8) | |
| Reinforced Insulation | 5656 VDC, Primary to Secondary |
| Basic Insulation | 2121 VDC, Primary to Ground |
| Operational Insulation | 707 VDC, Secondary to Ground |
| Leakage Current | |
| Earth Leakage | <300μA NC, <1000μA SFC |
| Touch Current | <100μA NC, <500μA SFC |
| Switching Frequency | 65 KHz |
| Remote Sense(9) | 400 mV compensation of output cable losses |
| Mean-Time Between Failures | >250,000 hours, MIL-HDBK-217F, 25° C, GB |
| Weight | 0.65 lbs. Open frame / 0.85 lbs. Chassis and cover |

EMC SPECIFICATIONS (IEC 60601-1-2:2014, 4TH ed./IEC 61000-6-2:2005)

| | | | |
|-----------------------------------|---------------|--|--------------|
| Electrostatic Discharge | EN 61000-4-2 | ±8KV contact / ±15KV air discharge | A |
| Radiated Electromagnetic Field | EN 61000-4-3 | 80MHz-2.7GHz, 10V/m, 80% AM | A |
| Electrical Fast Transients/Bursts | EN 61000-4-4 | ±2 KV, 5KHz/100KHz | A |
| Surge Immunity | EN 61000-4-5 | ±2 KV line to earth / ±1 KV line to line | A |
| Conducted Immunity | EN 61000-4-6 | 0.15 to 80MHz, 10V, 80% AM | A |
| Magnetic Field Immunity | EN 61000-4-8 | 30A/m, 60 Hz. | A |
| Voltage Dips | EN 61000-4-11 | 0% U _T , 0.5 cycles, 0-315° 100/240V A/A 0% U _T , 1 cycles, 0° 100/240V A/A 40% U _T , 10/12 cycles, 0° 100/240V B/A 70% U _T , 25/30 cycles, 0° 100/240V B/A | |
| Voltage Interruptions | EN 61000-4-11 | 0% U _T , 300 cycles, 0° | 100/240V B/B |
| Radiated Emissions | EN 55011/32 | Class B | |
| Conducted Emissions | EN 55011/32 | Class B | |
| Harmonic Current Emissions | EN 61000-3-2 | Class A (<100W P _{IN}) | |
| Voltage Fluctuations/Flicker | EN 61000-3-3 | Compliant | |


All specifications are maximum at 25°C/110W unless otherwise stated, may vary by model and are subject to change without notice.



INTEGRATED
POWER DESIGNS

300 Stewart Road ■ Wilkes-Barre, PA 18706 ■ Phone: (570) 824-4666 ■ Fax: (570) 824-4843 ■ Email: sales@ipdpower.com ■ Web: www.ipdpower.com

GRN-110 SINGLE MECHANICAL SPECIFICATIONS

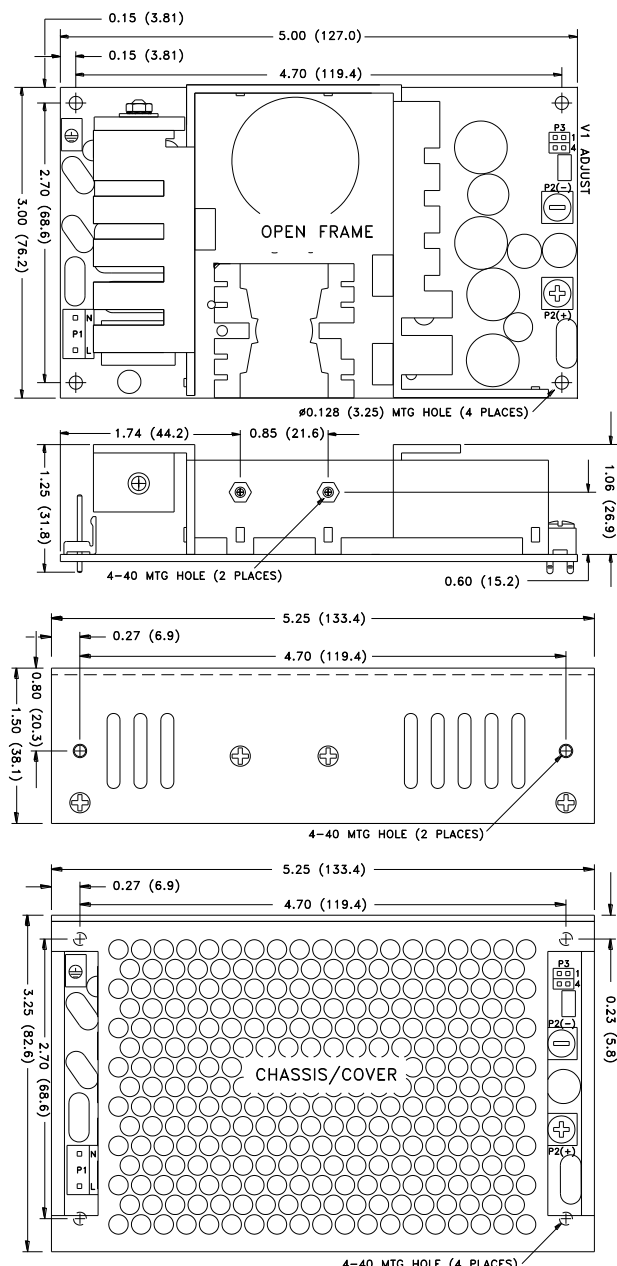

CONNECTOR SPECIFICATIONS


| | | | |
|----|--------------|--------------|--|
| P1 | NEUTRAL | AC Input | 0.156 friction lock header mates with Tyco 640250-3 or equivalent crimp housing with Tyco 640706-1 or equivalent crimp terminal. |
| | LINE | | |
| P2 | (+) OUTPUT | DC Output | 6-32 screw down terminal mates with #6 ring tongue terminal (10in-lb Max.) |
| | (-) OUTPUT | | |
| P3 | (-) SENSE | Remote Sense | 0.100 breakaway header mates with Molex 22-55-2041 or equivalent crimp terminal housing with Molex 71851 or equivalent crimp terminal. |
| | 3 | | |
| | 2 (+) SENSE | | |
| | 4 | | |
| | (-) OUTPUT | | |
| | 1 (+) OUTPUT | | |
| | Ground | | 0.187 quick disconnect terminal |
| | | | |

APPLICATIONS INFORMATION


- Continuous Output Power must not exceed 110W.
- Generally, adequate cooling is provided when semiconductor case temperatures do not exceed 70°C rise and transformer temperature does not exceed 60°C rise at any specified ambient temperature.
- Sufficient area must be provided around power supply to allow natural movement of air to develop in convection-cooled applications.
- This product is intended for use as a professionally-installed component within information technology, industrial, and medical equipment and is not intended for stand-alone operation.
- This product includes only one fuse in the input circuit. In consideration of clause 8.11.5 of IEC 60601-1-1:2005, a second fuse may be required in neutral conductor of the end product.
- Peak-to-Peak Output Ripple and Noise is measured directly at the output terminals of the power supply, without the use of the probe ground lead or retractable tip (tip-and-barrel method), 20 MHz bandwidth.
- This product was type-tested and safety-certified using the dielectric strength test voltages listed in Table 6 of IEC60601-1:2005. In consideration of clause 8.8.3, care must be taken to insure that the voltage applied to a reinforced insulation does not overstress different types and levels of insulation. Primary and secondary-to-ground capacitors may need to be disconnected prior to performing a dielectric strength type test on the power supply or the end product. It is highly recommended that the DC test voltage listed in DVB.1, annex DVB of UL60601-1 1ST Edition are not exceeded during a production-line dielectric strength test of the assembled end product. Please consult factory for further information.
- This power supply has been safety-approved and final-tested using a DC dielectric strength test. Please consult factory before performing an AC dielectric strength test.
- Remote-Sense terminals may be used to compensate for cable losses up to 400mV, depending on model. The use of a twisted pair, decoupling capacitors and an appropriately-rated low-impedance capacitor connected across the load will increase noise immunity.
- Maximum screw penetration into bottom chassis mounting holes is 0.100 inches. Maximum screw penetration into side chassis mounting holes is 0.188 inches.
- To comply with emissions specifications, all four mounting hole pads must be electrically connected to a common metal chassis. Chassis/Cover option is recommended. Refer to Operating Instructions for additional information.
- Common RF shielding precautions may need to be taken to assure emissions compliance. Refer to Operating Instructions for additional information.

TYPICAL EFFICIENCY vs. LOAD

(Model GRN-110-1004 Efficiency shown)

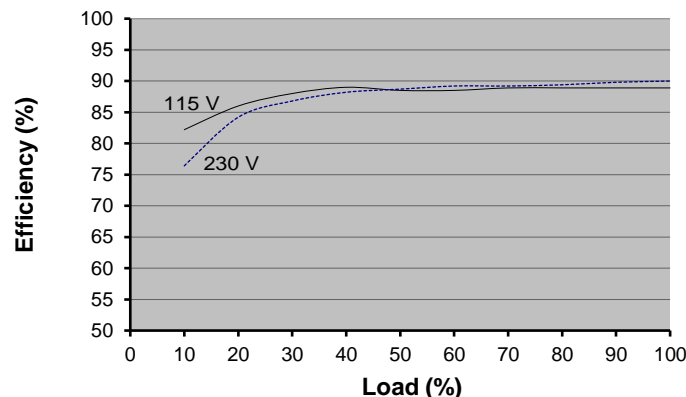

MAX P_{OUT} vs. AMBIENT TEMPERATURE/INPUT VOLTAGE

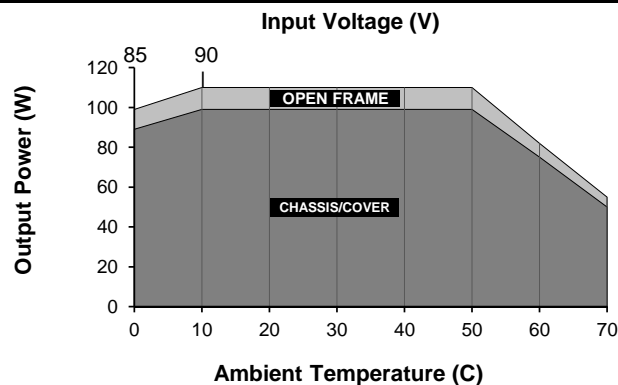

Derating requirements - Derate from 100% load at 50°C to 50% load at 70°C.
 - Derate from 100% load at 90V_{IN} to 90% load at 85V_{IN}.
 - Derate 10% with chassis and cover.