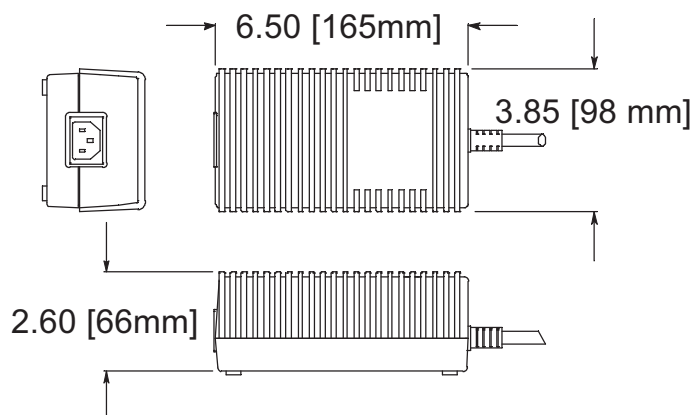


**Features:**

Wide Range AC input
Fully enclosed plastic case
Fully regulated output
High Efficiency
Warranty: 5 years

Environmental

Operating temperature....0° C to 40° C
Storage temperature.....-55° C to 85° C
Weight: 2.5 lbs

EMI

Meets FCC class B, CISPR 22 class B

Safety

UL 1950
CSA 950
CE mark

Polarity:

Pin1	Pin2	Pin3	Pin4	Pin5
Com	Com	V+	Com	V+

Electrical specifications**Input**

Voltage.....100-240VAC(90-265)
Current.....1A @ 115VAC
Frequency.....47-63 Hz
A/C cord.....Included - 6 foot cord
Input connector.....3 Pin IEC 320 receptacle

Output

Line regulation.....TYP 1%
Load regulation..... 5% Max

Set point..... +/-3% at 60% load
Hold up time.....20 ms min. at full load 115 VAC
Over voltage protection.....Built-in
Over current protection.....Built-in
Short circuit protection.....Pulsing Mode, auto recovery
Ripple/noise(Vp-p).....1%
Output connector.....D5(5 PIN DIN)

Output Electrical Specifications

Model No.	Voltage	Power	Current
W7215-D5	15	72	4.8A
W7218-D5	18	72	4A
W7224-D5	24	72	3A
W7248-D5	48	72	1.5A

