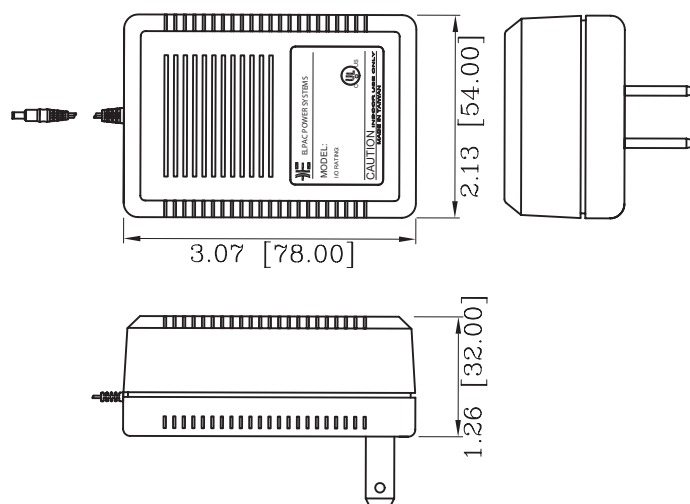


**Features:**

Wide Range AC input  
Fully enclosed plastic case  
Fully regulated output  
High Efficiency  
Warranty: 5 years

**Environmental**

Operating temperature....0°C to 40°C  
Storage temperature.....-55°C to 85°C  
Weight: 0.4 lbs

**EMI**

Meets FCC class B, CISPR 22 class B

**Safety**

UL 1950  
CSA 950  
CE mark

Polarity: COM  +V

**Electrical specifications****Input**

Voltage.....90-264VAC  
Current.....0.34A @ 115VAC  
Frequency.....47-63 Hz  
A/C cord.....Included  
Input connector.....3 Pin IEC 320 receptacle

**Output**

Line regulation.....TYP 1%  
Load regulation.....5% Max  
Set point.....5% of rated output  
Hold up time.....15 ms min. at full load 115 VAC  
Over voltage protection.....Built-in  
Over current protection.....Built-in  
Short circuit protection.....Pulsing Mode, auto recovery  
Ripple/noise(Vp-p).....1%  
Output connector.....barrel type(5.5 x 2.5 x 9.5mm)

**Output Electrical Specifications**

| Model No.      | Voltage | Power | Current |
|----------------|---------|-------|---------|
| WM1815/1.2-760 | 15      | 18    | 1.2A    |
| WM1818/1-760   | 18      | 18    | 1A      |
| WM1824/.75-760 | 24      | 18    | 0.75A   |
| WM1830/.6-760  | 30      | 18    | 0.6A    |
| WM1848/.38-760 | 48      | 18    | 0.38A   |



ELPAC POWER SYSTEMS

(949) 476-6070, [www.elpac.com](http://www.elpac.com), [sales@elpac.com](mailto:sales@elpac.com)