


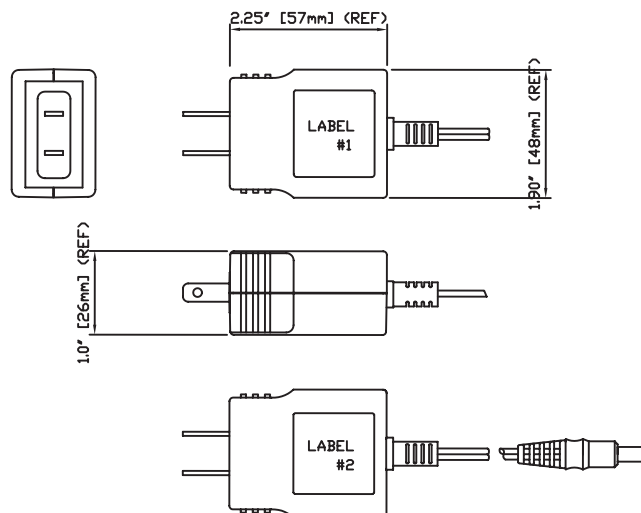

Features:

- Wide Range AC input
- Fully enclosed plastic case
- Fully regulated output
- High Efficiency
- Warranty: 5 years

Environmental

- Operating temperature....0° C to 40° C
- Storage temperature.....-55° C to 85° C
- Weight: 0.3 lbs

EMI

Meets FCC class B, CISPR 22 class B

Safety

- UL 1950
- cUL Listed to CSA 22.2 No. 950

Electrical specifications

Input

- Voltage.....100-240VAC
- Current.....0.2A
- Frequency.....47-63 Hz
- Input connector.....2 Pin NEMA 5/15 plug

Output

- Line regulation.....TYP 1%
- Load regulation..... 5% Max
- Set point.....5% of rated output
- Hold up time.....20 ms min. at full load 115 VAC
- Over voltage protection.....Built-in
- Over current protection.....Built-in
- Short circuit protection.....Pulsing Mode, auto recovery
- Ripple/noise(Vp-p).....1%
- Output connector.....barrel type(5.5 x 2.5 x 9.5mm)

Polarity: COM  +V

Output Electrical Specifications

Model No.	Voltage	Power	Current
WP1105-760	5	7.5	1.5A
WP1106-760	6	8	1.33A
WP1109-760	9	9	1A
WP1110-760	10	10	1A



ELPAC POWER SYSTEMS

(949) 476-6070, www.elpac.com, sales@elpac.com